


SECTION E-E

NOTE: IF CHAMBER AT HEAD OF S/W DRAIN, I.L. OF OUTLET PIPE TO BE 150mm ABOVE I.L. OF CHAMBER

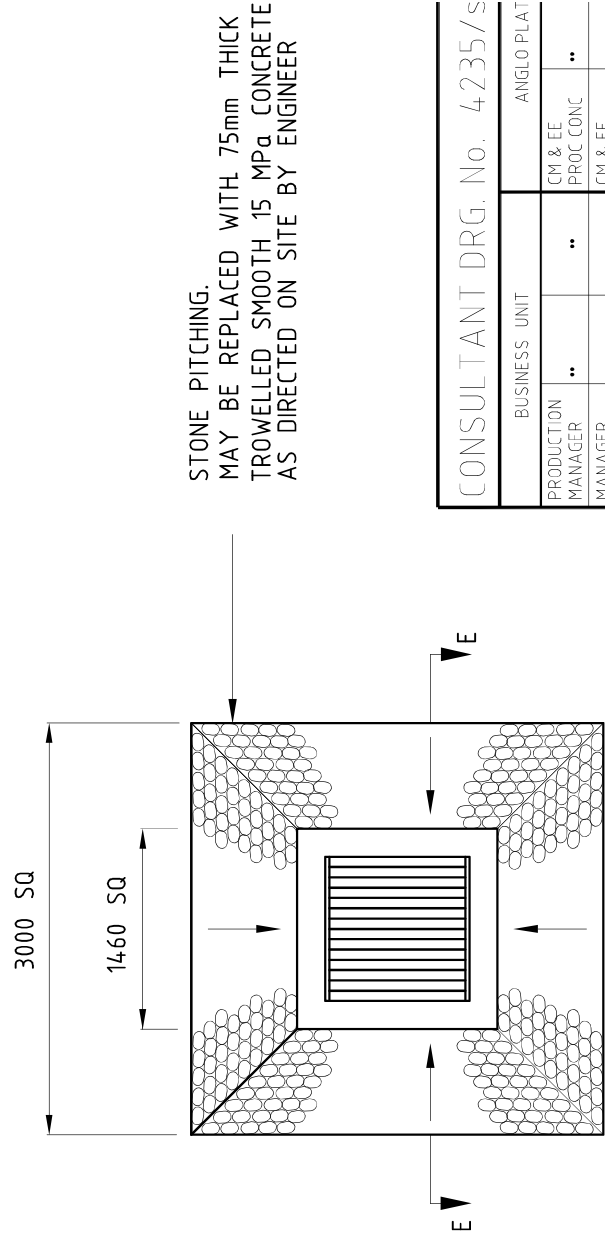

DO NOT SCALE

STONE PITCHING.
MAY BE REPLACED WITH 75mm THICK
TROWELLED SMOOTH 15 MPa CONCRETE
AS DIRECTED ON SITE BY ENGINEER

CONSULTANT DRG. No. 4235/s			
BUSINESS UNIT		ANGLO PLAT	
PRODUCTION MANAGER	..	CM & EE PROC CONC	..
MANAGER ENGINEERING	..	CM & EE CIV / STRUCT	..
PROCESS	..	CM & EE ELEC / INST	..
SECURITY	..	GROUP MECH ENGINEER	..