


15L - 110
3450 RPM


RATING CURVES
60 CYCLE

4 - 15 INCH - 3450 RPM

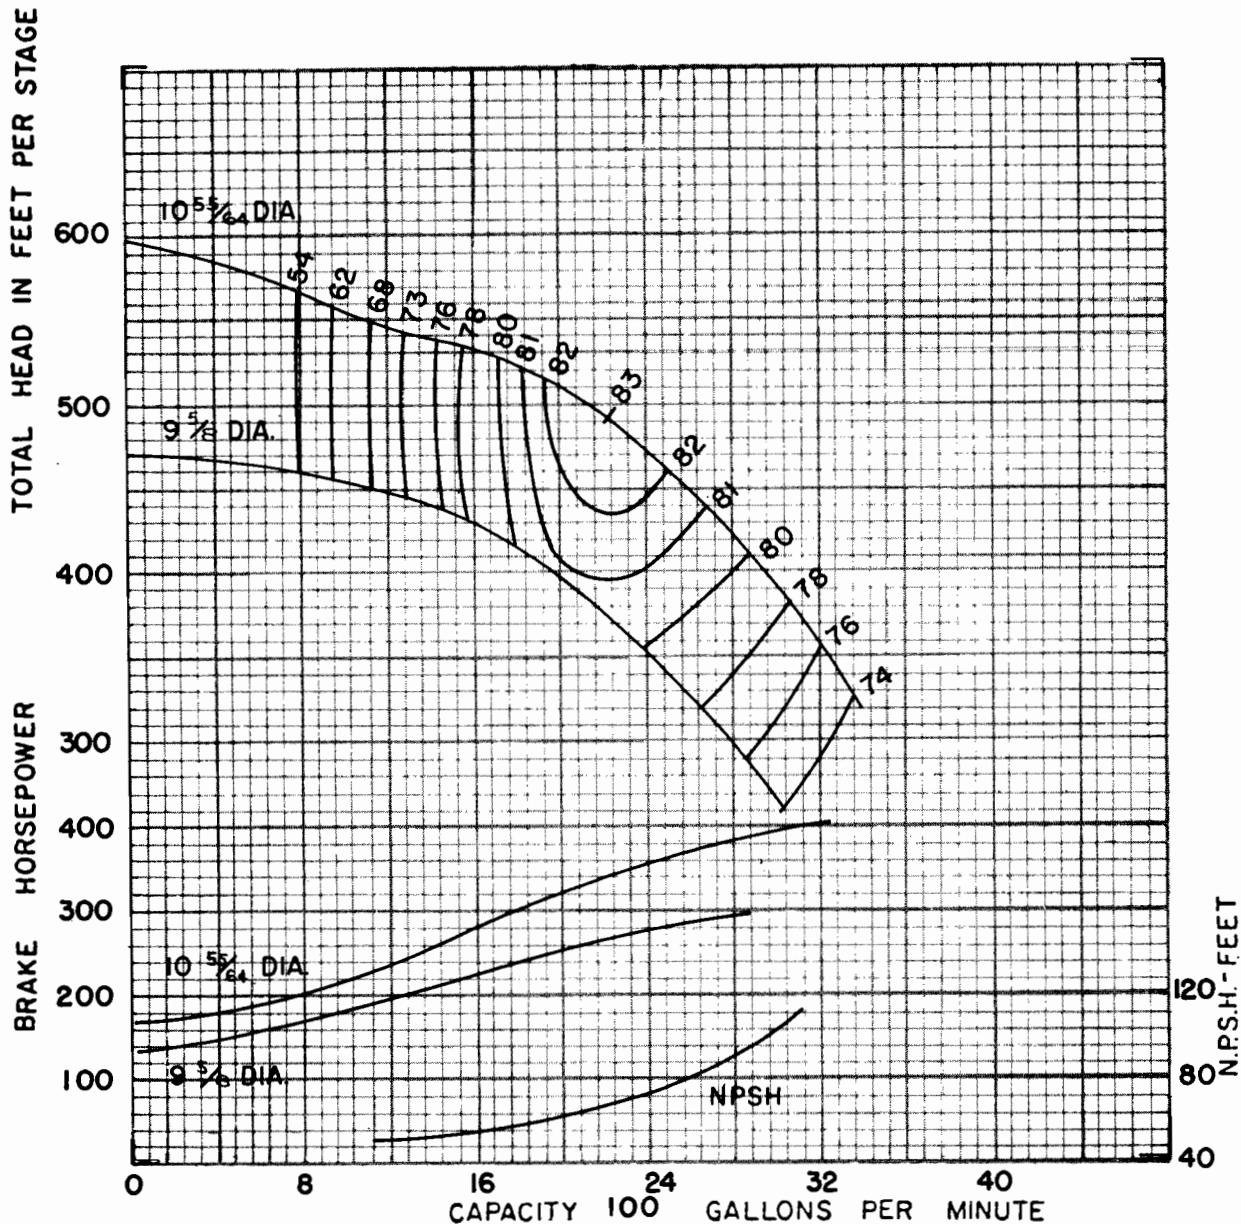

Efficiency shown is for 3 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Standard materials	
			Eff. change	
6	-	Imp.-bronze	-	Thrust factor 13.7
5	-	Imp.-cast iron	-1	Rotor wt. per stage 50
4	-	Imp.-c.i. enm.	+1	Bowl wt. 1st stage 365
3	-	Bowl-c.i. enm.	-	Bowl wt. add'l stage 180
2	-1	Bowl-cast iron	-2	Max. bowl hp. 1140
1	-3	Bowl-bronze	-15	Impeller eye area (sq. in.) 18.7

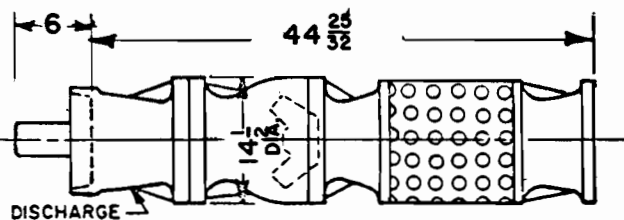

For additional stages add 11 1/8 per stage

Column pipe	8	6	Shaft end play	.97
Suction pipe				
Impeller shaft dia.	2.25			