

GENERATOR DATA**JULY 18, 2006**Can't find what you're looking for? [Click here](#)**Selected Model**

Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

Spec Information

Generator Specification			Generator Efficiency		
Frame: 825	Type: SR4B	No. of Bearings: 1	Per Unit Load	kW	Efficiency %
Winding Type: FORM WOUND	Flywheel: 21.0		0.25	456.3	93.3
Connection: SERIES STAR	Housing: 00		0.5	912.5	95.9
Phases: 3	No. of Leads: 6		0.75	1368.8	96.5
Poles: 4	Wires per Lead: 8		1.0	1825.0	96.7
Sync Speed: 1800	Generator Pitch: 0.6667		1.1	2007.5	96.7

Reactances	Per Unit	Ohms
SUBTRANSIENT - DIRECT AXIS X'_d	0.1347	0.0136
SUBTRANSIENT - QUADRATURE AXIS X''_q	0.1228	0.0124
TRANSIENT - SATURATED X'_d	0.2178	0.0220
SYNCHRONOUS - DIRECT AXIS X_d	2.9981	0.3028
SYNCHRONOUS - QUADRATURE AXIS X_q	1.4723	0.1487
NEGATIVE SEQUENCE X_2	0.1287	0.0130
ZERO SEQUENCE X_0	0.0079	0.0008

Time Constants	Seconds
OPEN CIRCUIT TRANSIENT - DIRECT AXIS T'_{d0}	6.6330
SHORT CIRCUIT TRANSIENT - DIRECT AXIS T'_d	0.4643
OPEN CIRCUIT SUBTRANSIENT - DIRECT AXIS T''_{d0}	0.0074
SHORT CIRCUIT SUBTRANSIENT - DIRECT AXIS T''_d	0.0064
OPEN CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T''_{q0}	0.0057
SHORT CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T''_q	0.0050
EXCITER TIME CONSTANT T_e	0.2225
ARMATURE SHORT CIRCUIT T_a	0.0438

Short Circuit Ratio: 0.43

Stator Resistance = 0.0015 Ohms

Field Resistance = 1.003 Ohms

Voltage Regulation		Generator Excitation		
Voltage level adjustment: +/-	5.0%	No Load	Full Load, (rated) pf	
Voltage regulation, steady state: +/-	0.5%		Series	Parallel
Voltage regulation with 3% speed change: +/-	0.5%	Excitation voltage:	7.94 Volts	28.09 Volts Volts
Waveform deviation line - line, no load: less than	3.0%	Excitation current	2.09 Amps	7.39 Amps Amps
Telephone influence factor: less than	50			

Selected Model

Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451


Generator Mechanical Information

Center of Gravity		
Dimension X	-906.8 mm	-35.7 IN.
Dimension Y	0.0 mm	0.0 IN.
Dimension Z	0.0 mm	0.0 IN.

- "X" is measured from driven end of generator and parallel to rotor. Towards engine fan is positive. See General Information for details
- "Y" is measured vertically from rotor center line. Up is positive.
- "Z" is measured to left and right of rotor center line. To the right is positive.

Generator WT = 4330 kg	* Rotor WT = 1541 kg	* Stator WT = 2789 kg
9,546 LB	3,397 LB	6,149 LB

Rotor Balance = 0.0508 mm deflection PTP
 Overspeed Capacity = 150% of synchronous speed

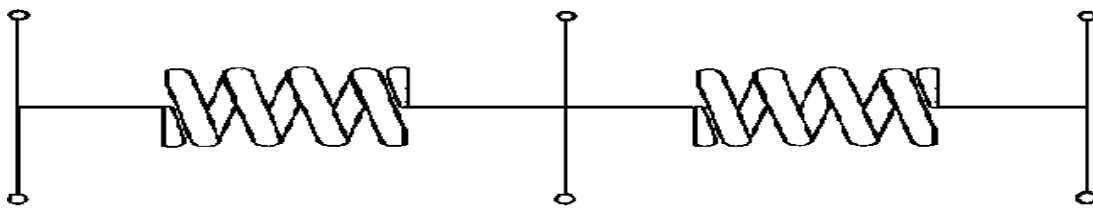Generator Torsional Data						
						
J1 = Coupling and Fan		J2 = Rotor		J3 = Exciter End		
TOTAL J = J1 + J2 + J3						
K1 = Shaft Stiffness between J1 + J2 (Diameter 1)			K2 = Shaft Stiffness between J2 + J3 (Diameter 2)			
J1	K1	Min Shaft Dia 1	J2	K2	Min Shaft Dia 2	J3
23.1 LB IN. s ²	265.5 MLB IN./rad	6.2 IN.	456.1 LB IN. s ²	57.5 MLB IN./rad	3.8 IN.	2.3 LB IN. s ²
2.608 N m s ²	30.0 MN m/rad	157.0 mm	51.534 N m s ²	6.5 MN m/rad	96.5 mm	0.257 N m s ²
Total J						
			481.5 LB IN. s ²			
			54.399 N m s ²			

Selected Model

Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

**Generator Cooling Requirements -
Temperature - Insulation Data**

Cooling Requirements:	Temperature Data: (Ambient 40 °C)
Heat Dissipated: 62.3 kW	Stator Rise: 105.0 °C
Air Flow: 0.0 m ³ /min	Rotor Rise: 105.0 °C
Insulation Class: H	
Insulation Reg. as shipped: 100.0 MΩ minimum at 40 °C	

Thermal Limits of Generator

Frequency:	60 Hz
Line to Line Voltage:	480 Volts
B BR 80/40	1893.0 kVA
F BR -105/40	2281.0 kVA
H BR - 125/40	2500.0 kVA
F PR - 130/40	2500.0 kVA

Selected Model


Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

Starting Capability & Current Decrement


Motor Starting Capability (0.4 pf)

SKVA	Percent Volt Dip
280	2.5
574	5.0
884	7.5
1,212	10.0
1,558	12.5
1,925	15.0
2,314	17.5
2,727	20.0
3,167	22.5
3,636	25.0
4,137	27.5
4,675	30.0
5,252	32.5
5,873	35.0
6,545	37.5
7,272	40.0

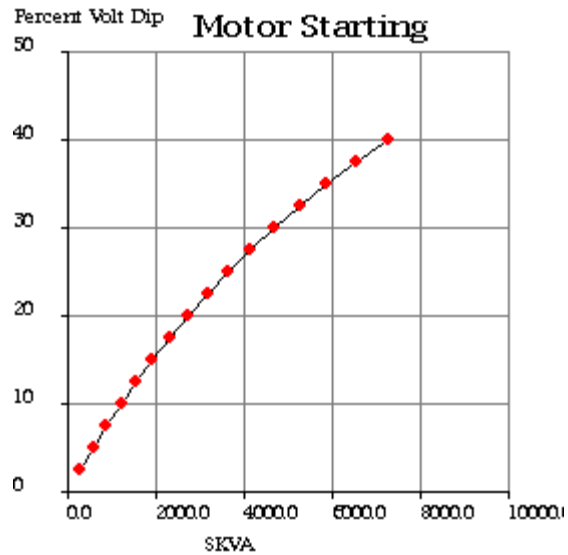

Current Decrement Data

E Time Cycle	AMP
0.0	20,213
1.0	12,753
2.0	11,824
3.0	11,407
4.0	11,039
5.0	10,687
7.5	9,862
10.0	9,107
12.5	8,417
15.0	7,786
20.0	6,683
25.0	5,760
30.0	5,247
35.0	5,485
40.0	5,852
45.0	6,230

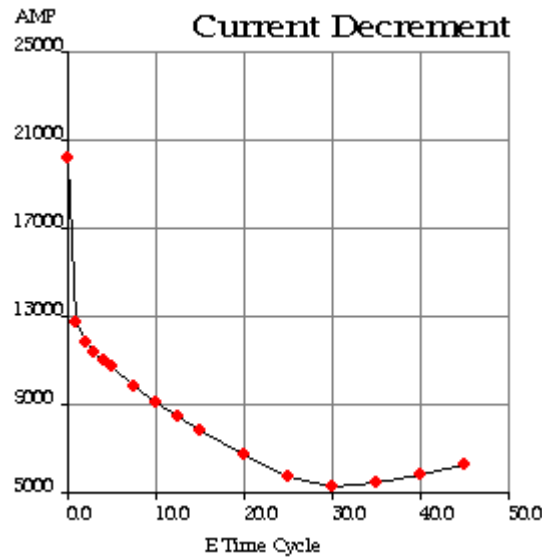

Instantaneous 3 Phase Fault Current: 20213 Amps **Instantaneous Line - Line Fault Current:** 17909 Amps
Instantaneous Line - Neutral Fault Current: 30076 Amps

Selected Model


Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

Generator Output Characteristic Curves


Open Circuit Curve

Field Current	Line - Line Volt
0.0	0
10.1	288
12.0	336
14.2	384
17.1	432
21.7	480
30.2	528
48.0	576
87.5	624
177.7	672

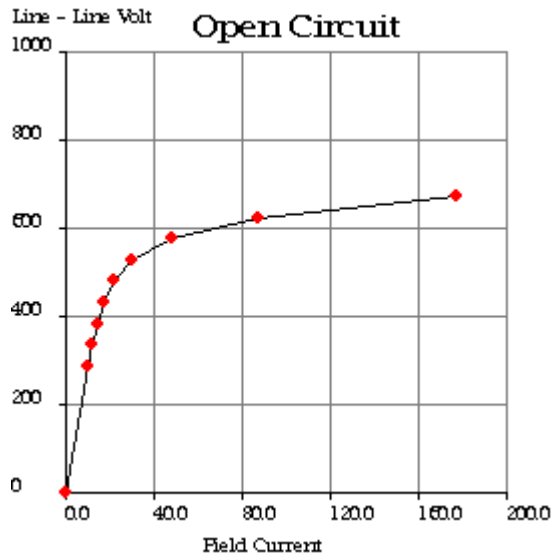

Short Circuit Curve

Field Current	Armature Current
0.0	0
29.5	1,646
34.4	1,921
39.3	2,195
44.3	2,470
49.2	2,744
54.1	3,018
59.0	3,293
63.9	3,567
68.9	3,841

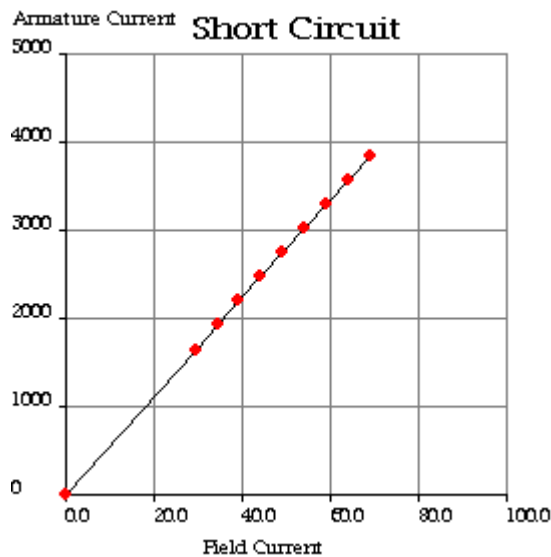

Selected Model


Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

Generator Output Characteristic Curves


Zero Power Factor Curve

Field Current	Line - Line Volt
49.2	0
61.6	240
64.1	288
67.7	336
73.8	384
85.8	432
111.7	480
170.1	528
304.8	576
618.2	624

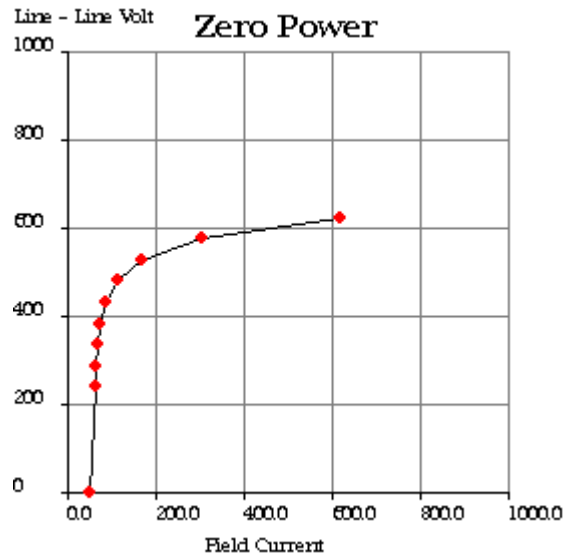

Air Gap Curve


Field Current	Line - Line Volt
0.0	0
9.9	288
11.6	336
13.2	384
14.9	432
16.5	480
18.2	528
19.8	576
21.5	624
23.1	672

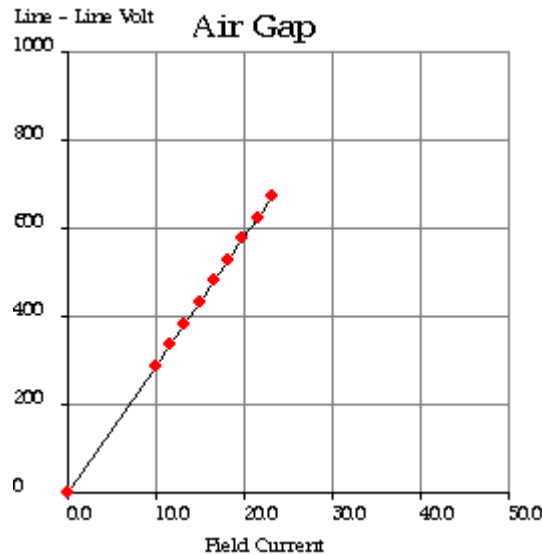

Selected Model

Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

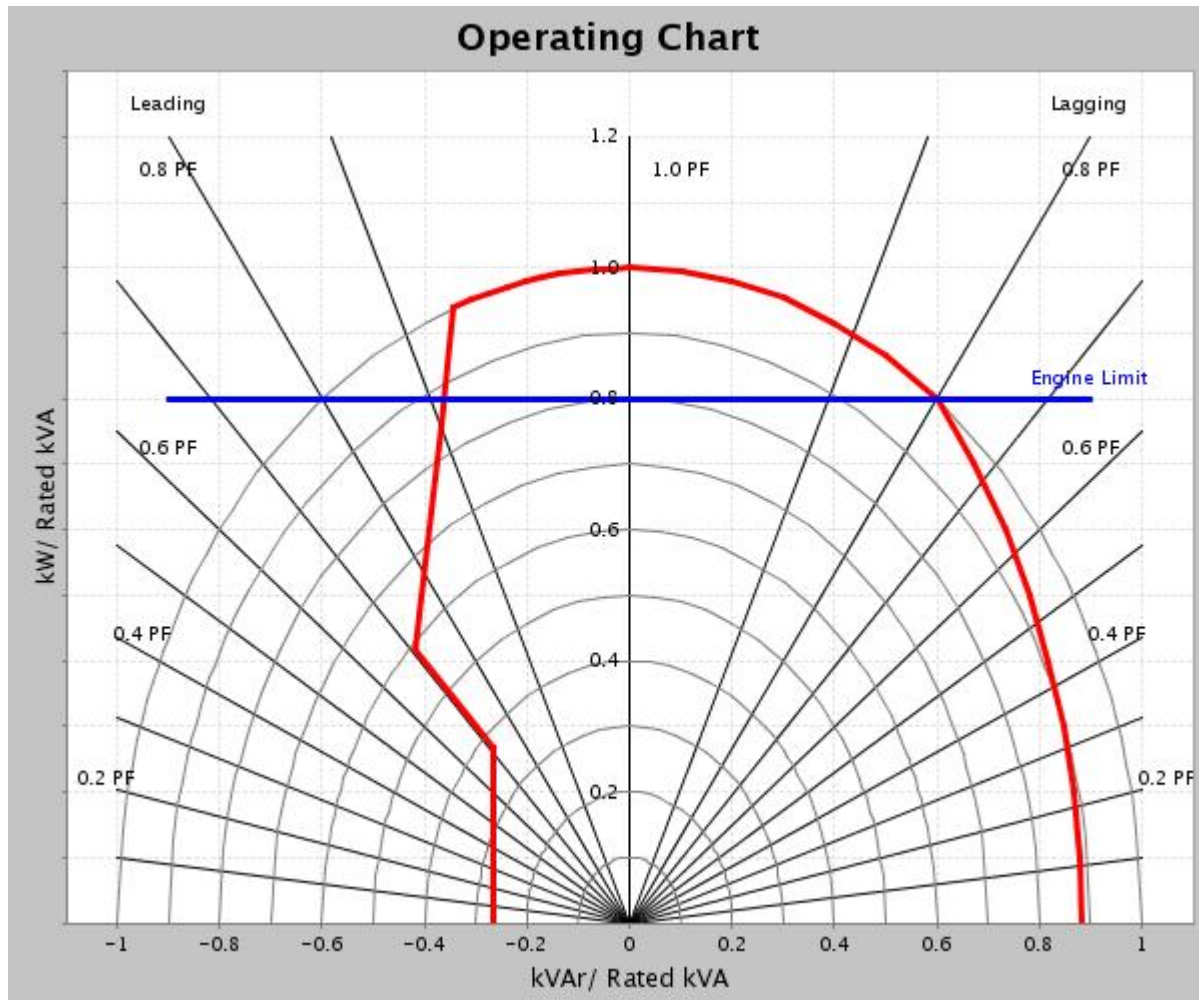Reactive Capability Curve


Selected Model

Engine: 3516 **Generator Frame:** 825 **Genset Rating (kW):** 1825.0 **Line Voltage:** 480
Fuel: Diesel **Generator Arrangement:** 1441952 **Genset Rating (kVA):** 2281.0 **Phase Voltage:** 277
Frequency: 60 **Excitation Type:** Permanent Magnet **Pwr. Factor:** 0.8 **Rated Current:** 2743.6
Duty: PRIME **Connection:** SERIES STAR **Application:** EPG **Status:** Current

Version: 38699 /38577 /38180 /6451

General Information

DM7802

GENERATOR GENERAL INFORMATION

I. GENERATOR MOTOR STARTING CAPABILITY CURVES

A. THE MOTOR STARTING CURVES ARE REPRESENTATIVE OF THE DATA OBTAINED BY THE FOLLOWING PROCEDURE:

1. THE CATERPILLAR GENERATOR IS DRIVEN BY A SYNCHRONOUS DRIVER.
2. VARIOUS SIZE THREE PHASE INDUCTION MOTORS (NEMA CODE F) ARE STARTED ACROSS THE LINE LEADS OF THE UNLOADED GENERATOR.
3. THE RESULTING VOLTAGE DIPS ARE RECORDED WITH AN OSCILLOSCOPE.
4. MOTOR HORSEPOWER HAS BEEN CONVERTED TO STARTING KILOVOLT AMPERES (SKVA).
5. RECORDED VOLTAGE DIPS HAVE BEEN EXPRESSED AS A OF GENERATOR RATED VOLTAGE.

II. USE OF THE MOTOR STARTING CAPABILITY CURVES.

A. CALCULATE THE SKVA REQUIRED BY THE MOTOR FOR FULL VOLTAGE STARTING ACROSS THE LINE IF THE VALUE IS NOT LISTED ON THE MOTOR DATA PLATE.

1. MOTORS CONFORMING TO NEMA STANDARDS
MULTIPLY THE MOTOR HORSEPOWER BY THE NEMA SKVA/HP FIGURE. FOR NEMA CODE F, USE 5.3 SKVA/HP; FOR NEMA CODE G, USE 6.0 SKVA/HP.

2. ALL OTHER MOTORS:

MULTIPLY THE RATED VOLTAGE BY THE LOCKED ROTOR AMPERE AND BY 0.001732. (IF THE LOCKED ROTOR AMPERES ARE NOT LISTED, MULTIPLY THE FULL LOAD (RUNNING) AMPERES BY

B. USE THE ABOVE SKVA WITH THE MOTOR STARTING TABLE.

1. ACROSS LINE STARTING:

READ ACROSS THE ROW OF "ACROSS THE LINE STARTING SKVA IF THE DESIRED VALUE OF SKVA IS NOT GIVEN, CALCULATE THE DIP BY FINDING THE PROPER SKVA INTERVAL AND INTERPOLATING AS FOLLOWS:

SKVA1 IS THE SKVA TABLE ENTRY JUST SMALLER THAN THE DESIRED SKVA, DIP1 IS THE DIP FOR SKVA2, AND SKVA2 IS THE SKVA TABLE ENTRY JUST GREATER THAN THE DESIRED SKVA. THE DIP (IN PERCENT) AT THE DESIRED SKVA IS:

$$\text{DIP} = \text{DIP1} + (\text{SKVA} - \text{SKVA1}) * 2.5 / (\text{SKVA2} - \text{SKVA1})$$

NOTE: VOLTAGE DIPS GREATER THAN 35% MAY CAUSE MAGNETIC CONTACTORS TO DROP OUT.

2. REDUCED VOLTAGE STARTING:

REFER TO THE FOLLOWING TABLE. MULTIPLY THE CALCULATE ACROSS LINE SKVA BY THE MULTIPLIER LISTED FOR THE SPECIFIC STARTING METHOD. APPLY THE RESULT TO THE STARTING TABLE AS IN II A, TO CALCULATE THE EXPECTED VOLTAGE DIP:

TYPE OF REDUCED VOLTAGE STARTING	MULTIPLY LINE SKVA BY
80% TAP	.80
65% TAP	.65
50% TAP	.50
45% TAP	.45
Wye start,delta run	.33

AUTOTRANSFORMER	
80% TAP	.68
65% TAP	.46
50% TAP	.29

NOTE: REDUCE VOLTAGE STARTING LOWERS THE MAXIMUM REQUIRED MOTOR skVA.

3. Part winding starting:

Most common is half-winding start, full-winding run. Multiply the full motor, accross line starting skVA by 0.6. Apply the result to the selected curve as in ii. A above. Read the expected voltage dip, for the required skVA.

III. DEFINITION:

A. GENERATOR TERMS

MODEL: Engine Sales model
 ENG TYPE: DI = Direct Injection,
 NA = Naturally aspirated, etc
 HZ: Running frequency, hertz
 RATING TYPE: PP, SB (prime power or standby)
 KW: Base rating electrical kilowatts (ekW)
 VOLTS: Rating terminal, line to line
 GEN ARR: Cat generator arrangement part number
 GEN FRAME: Generator frame size designation
 CONN: Generator output connection
 (star, wye, delta, ect.)
 POLES: Number of pole pieces on rotor.
 (eg. A 4 pole generator run at 1800)
 RPM will produce 60 Hz alternating current. A 6 pole generator run at 1200 RPM will produce 60 Hz alternating current.)

B. GENERATOR TEMPERATURE RISE:

The indicated temperature rise indicated the NEMA limits for standby or prime power applications. These rises are used for calculating the losses and efficiencies and are not necessarily indicative of the actual temperature rise of a given machine.

C. CENTER OF GRAVITY

The specified center of gravity is for the generator only. For single bearing, and two bearing close coupled generators, the center of gravity is measured from the generator/engine flywheel housing interface and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

D. GENERATOR DECREMENT CURRENT CURVES

The generator decrement current curve gives the symmetrical current supplied by the generator for a three phase bolted fault at the generator terminals. Generators equipped with the series boost attachment or generators with PM excitation system will supply 300% of rated current for at least 10 seconds.

E. GENERATOR EFFICIENCY CURVES

The efficiency curve is representative of the overall generator efficiency over the normal range of the electrical load and at the specified parameters. This is not the overall engine generator set efficiency curve.

Caterpillar Confidential: **Green**

Content Owner: Alan Scott

Web Master(s): [PSG Web Based Systems Support](#)

Current Date: Tuesday, July 18, 2006 3:33:05 PM

© Caterpillar Inc. 2006 All Rights Reserved.

[Data Privacy Statement](#).