

C1 Initialising the VoIP Gateway Card


In case you have forgotten, for example, the IP address or log-in password you set to the VoIP Gateway Card, follow the procedure below to return the settings of the card to the factory default.

Note

Resetting the card will restore all settings, not just the IP address and log-in password, to the factory default.

KX-TDA3480


1. Install the card to the KX-TDA30 PBX, and then turn on the power to the PBX.

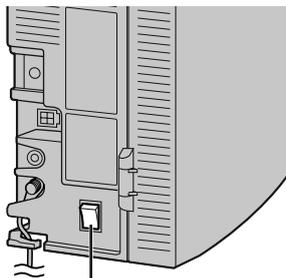

2. Using the KX-TDA30 Maintenance Console, confirm that the card is in service (INS).



3. Set the System Initialise Switch to the "SYSTEM INITIALIZE" position.

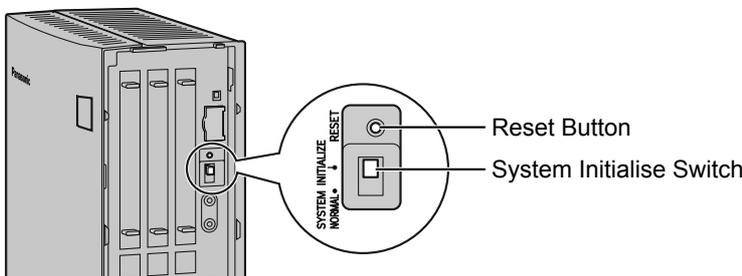


CAUTION

Do not press the Reset Button nor turn the power off then on while the System Initialise Switch is in this position. Doing so will initialise the PBX.

4. Using the KX-TDA30 Maintenance Console, set the status of the card to **OUS**, then set it back to **INS**.
5. Return the System Initialise Switch to the "NORMAL" position.

KX-TDA0484


1. Install the card to the KX-TDA100/KX-TDA200/KX-TDA600 PBX, and then turn on the power to the PBX.

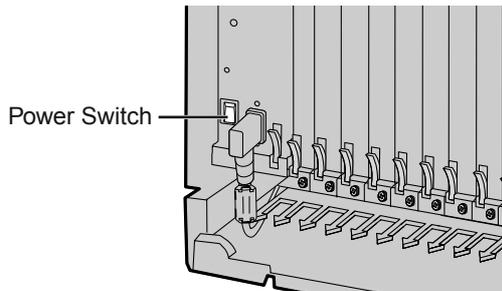

2. Using the Maintenance Console, confirm that the card is in service (INS).



3. Set the System Initialise Switch to the "SYSTEM INITIALIZE" position.

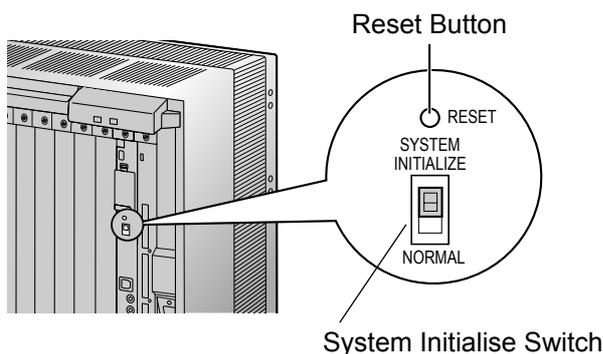

CAUTION

Do not press the Reset Button nor turn the power off then on while the System Initialise Switch is in this position. Doing so will initialise the PBX.

4. Using the Maintenance Console, set the status of the card to **OUS**, then set it back to **INS**.
5. Return the System Initialise Switch to the "NORMAL" position.