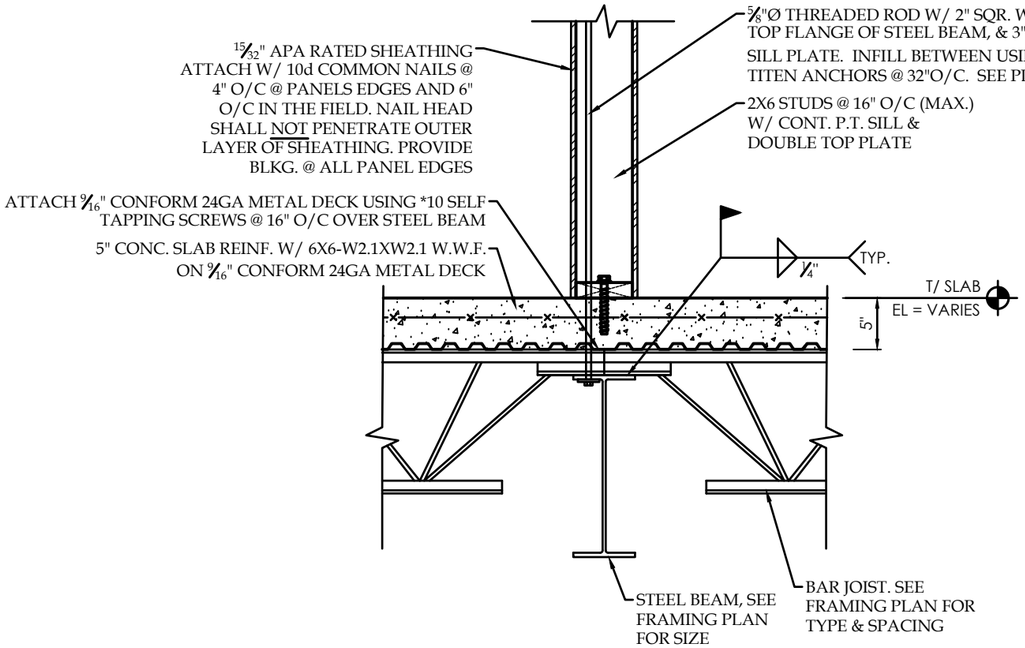
15/32" APA RATED SHEATHING ATTACH W/ 10d COMMON NAILS @ 4" O/C @ PANELS EDGES AND 6" O/C IN THE FIELD. NAIL HEAD SHALL NOT PENETRATE OUTER LAYER OF SHEATHING. PROVIDE BLKG. @ ALL PANEL EDGES
5/8"Ø THREADED ROD W/ 2" SQR. WASHER & NUT UNDER TOP FLANGE OF STEEL BEAM, & 3" WASHER & NUT @ EA. SILL PLATE. INFILL BETWEEN USING 5/8"ØX5" SIMPSON TITEN ANCHORS @ 32"O/C. SEE PLAN FOR LOCATION.
2X6 STUDS @ 16" O/C (MAX.) W/ CONT. P.T. SILL & DOUBLE TOP PLATE
ATTACH 9/16" CONFORM 24GA METAL DECK USING *10 SELF TAPPING SCREWS @ 16" O/C OVER STEEL BEAM
5" CONC. SLAB REINF. W/ 6X6-W2.1XW2.1 W.W.F. ON 9/16" CONFORM 24GA METAL DECK
1/4"
TYP.
T/ SLAB
EL = VARIES
5"
STEEL BEAM, SEE FRAMING PLAN FOR SIZE
BAR JOIST. SEE FRAMING PLAN FOR TYPE & SPACING

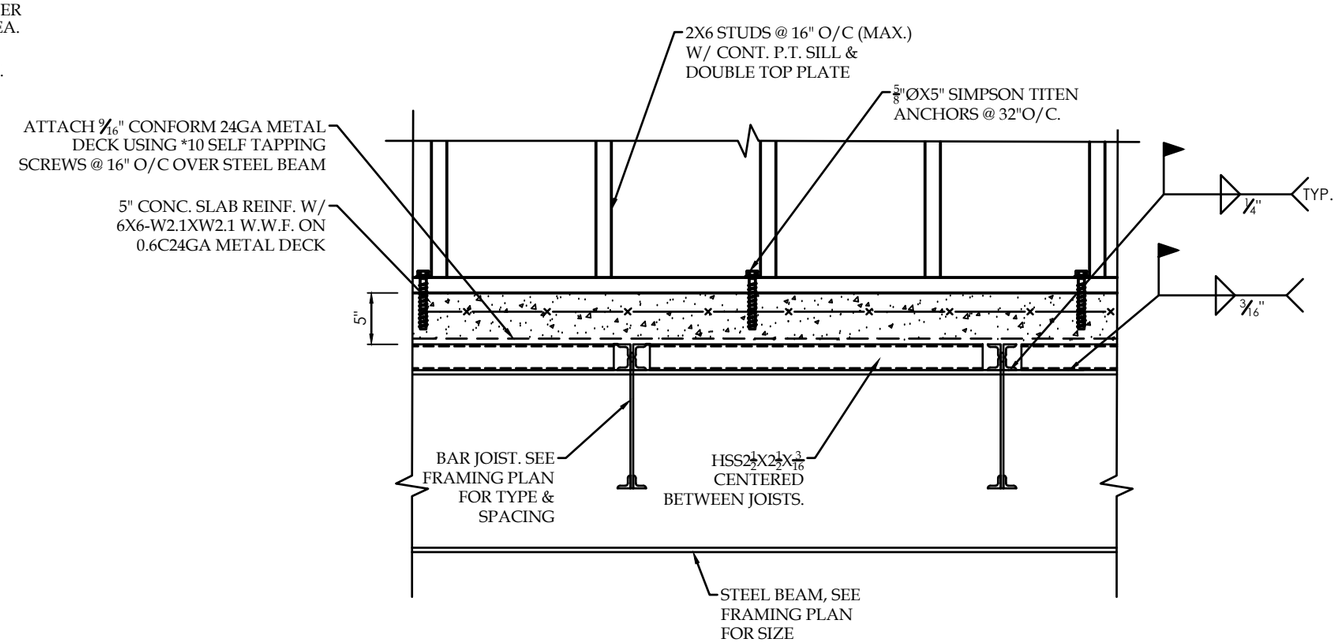
2X6 STUDS @ 16" O/C (MAX.) W/ CONT. P.T. SILL & DOUBLE TOP PLATE
5/8"ØX5" SIMPSON TITEN ANCHORS @ 32"O/C.
ATTACH 9/16" CONFORM 24GA METAL DECK USING *10 SELF TAPPING SCREWS @ 16" O/C OVER STEEL BEAM
5" CONC. SLAB REINF. W/ 6X6-W2.1XW2.1 W.W.F. ON 0.6C24GA METAL DECK
1/4"
TYP.
3/16"
5"
BAR JOIST. SEE FRAMING PLAN FOR TYPE & SPACING
HSS2 1/2X2 1/2X3/16 CENTERED BETWEEN JOISTS.
STEEL BEAM, SEE FRAMING PLAN FOR SIZE