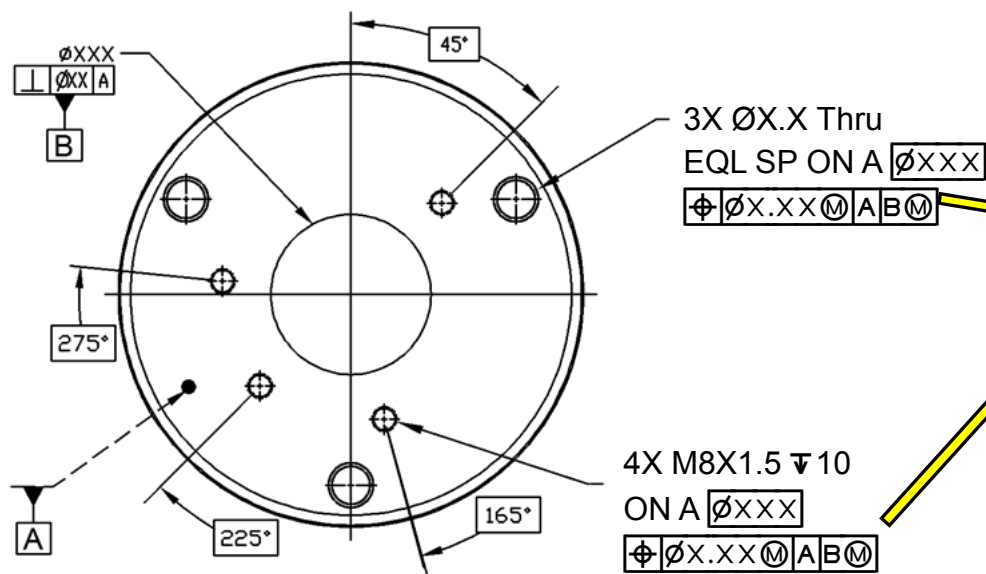**Option One:**

Choose one of the three hole as Tertiary datum feature as shown on the right figure, this is your intent and it will meet your requirement.

3X ØX.X Thru
EQL SP ON A | ØXXX |
| ⌖ | ØX.XX Ⓜ | A | B Ⓜ |

4X M8X1.5 ↧ 10
ON A | ØXXX |
| ⌖ | ØX.XX Ⓜ | A | B Ⓜ | C |

Option Two: Remove Tertiary datum feature

3X ØX.X Thru
EQL SP ON A | ØXXX |
| ⌖ | ØX.XX Ⓜ | A | B Ⓜ |

| | A | B Ⓜ |

Both of the FCF owns a common datum features, same order of precedence and same material condition, they are implied simultaneous requirement now, so this will restrict and keep the angular relationship between the features.

4X M8X1.5 ↧ 10
ON A | ØXXX |
| ⌖ | ØX.XX Ⓜ | A | B Ⓜ |