


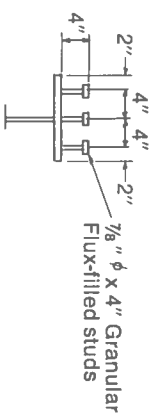
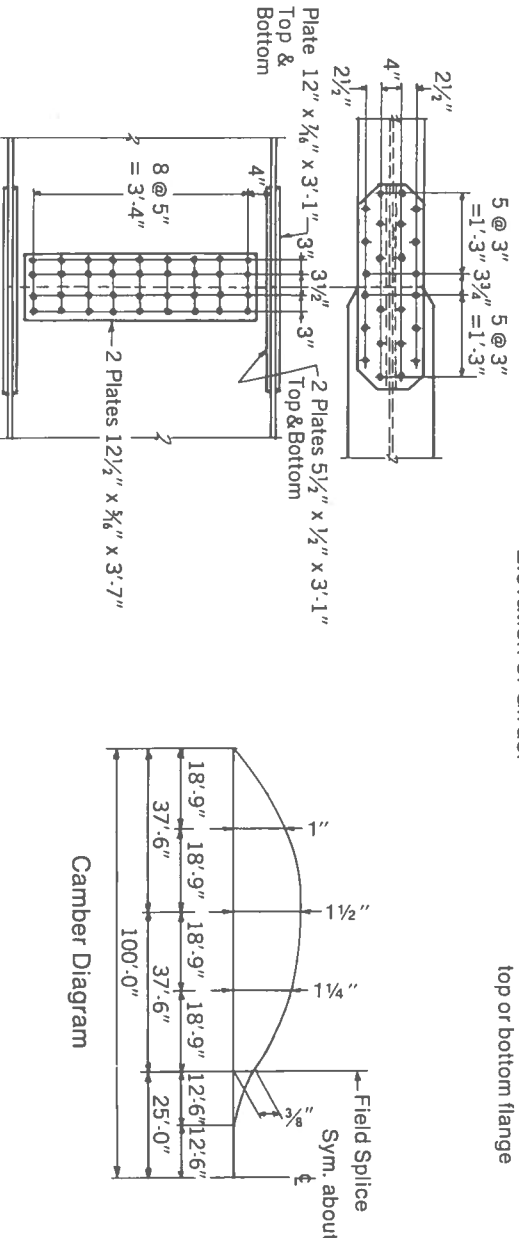
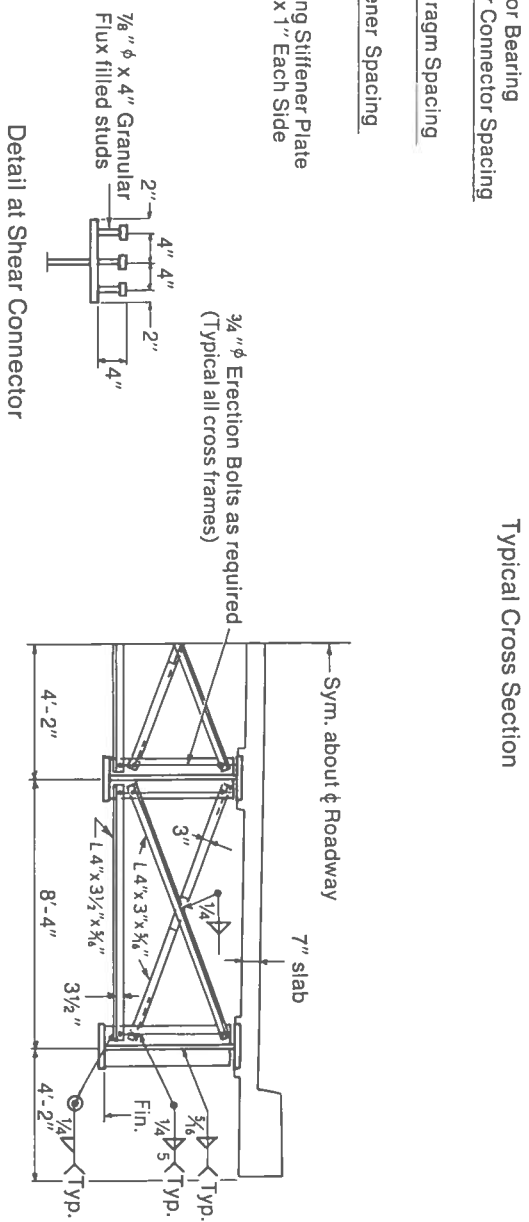


**Note:**  
All material ASTM-A36

\*Total Wt. = 51,180 lb  
Wt. per sq ft (o. to o. slab) = 19.19 lb per sq ft

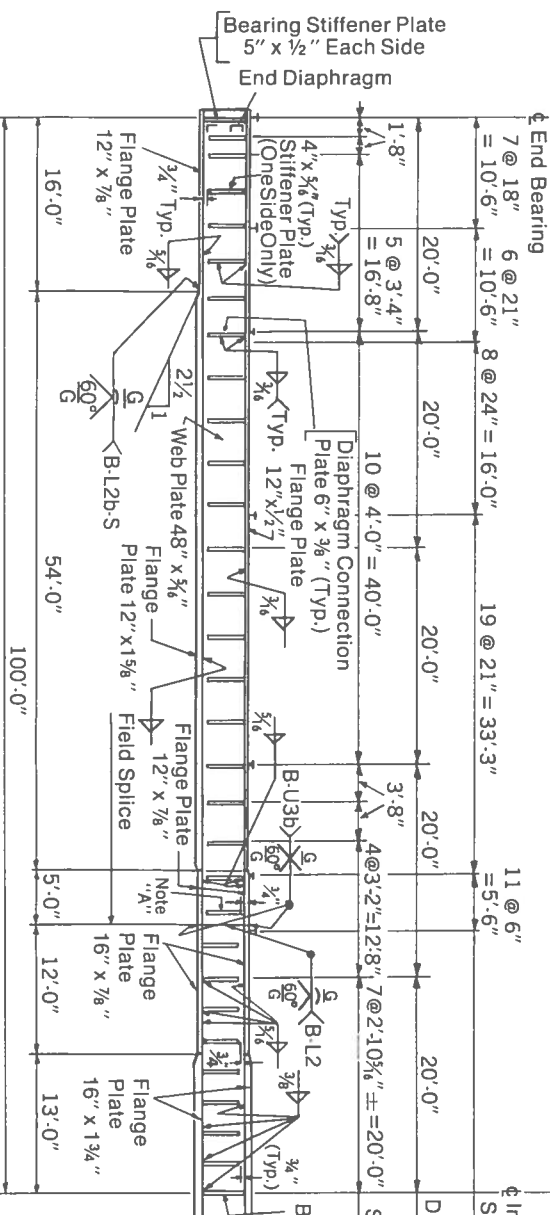

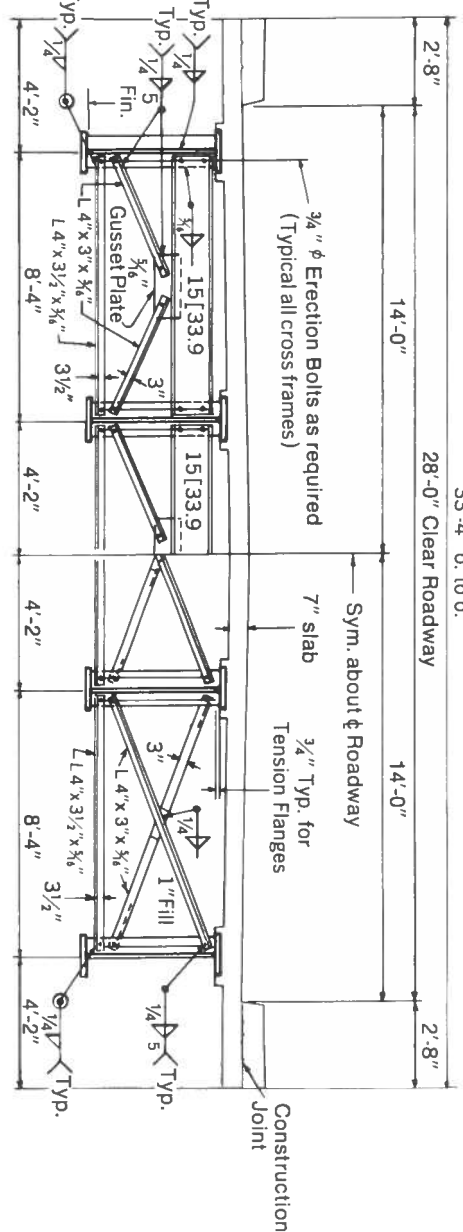

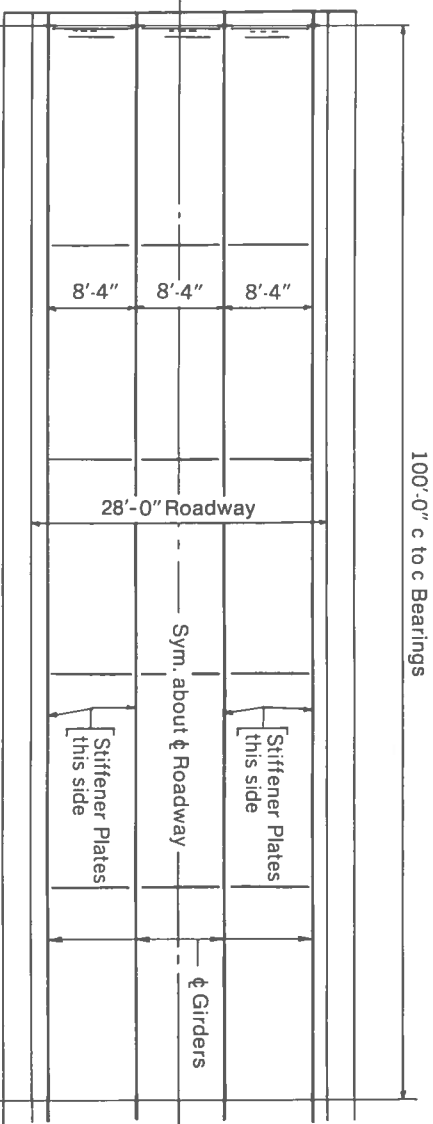

Alternate Bolted Field Splice  
All bolts shall be 7/8"  $\phi$  H.S. Bolts  
ASTM A325

\*Total Wt. = 134,444 lb  
Wt. per sq ft (o. to o. slab) = 20.17 lb per sq ft

\*Wt. does not include bearing  
shoes, railing or studs.

Note:  
All material ASTM-A36

Composite Design Example  
2-Span Continuous Welded Girders  
Design II





