


Model B-2 Trolley Clamp

The Model B-2 is a beam trolley clamp that provides connection of a hoist or chain fall to an overhead beam and enables it to be moved along the beam as the necessity arises. Equipped with four heavy duty rollers, the Model B-2, with load attached, can be moved along any length of American Standard or wide flange beams. The fluted tool steel locking wedge permits the clamp to be temporarily or permanently locked at a particular position along the beam.



MODEL B-2 EXPLODED VIEW

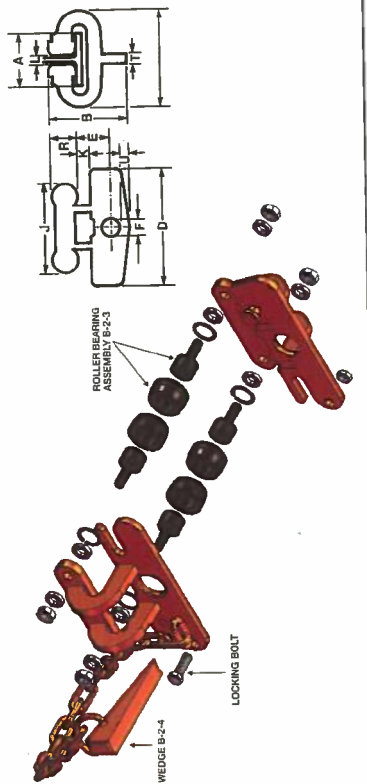

SPECIFICATIONS (in inches)

Rated Capacity Tons	Flange Width A	B	C	D	E	F	J	K	L	R	T	U	Weight (in pounds)
1	1 1/2-4	5 1/4	7 1/4	8 1/4	2 1/4	1 1/2	5 1/4	1 1/4	1 1/4	2	3/4	3/4	18
2	5-8	7 1/4	10 1/4	8 1/4	3 1/4	1 1/2	8 1/4	1 1/4	1 1/4	3 1/2	3/4	3/4	28
3	9-12	8 1/4	11 1/4	8 1/4	3 1/4	1 1/2	8 1/4	1 1/4	1 1/4	3 1/2	3/4	3/4	38
4	13-16	10 1/4	12 1/4	11 1/4	4	2 1/4	12 1/4	1 1/4	1 1/4	5 1/4	3/4	3/4	65
5	17-20	12 1/4	14 1/4	13 1/4	4 1/4	2 1/4	14 1/4	1 1/4	1 1/4	5 1/4	3/4	3/4	78
6	21-24	14 1/4	16 1/4	15 1/4	5	3 1/4	16 1/4	1 1/4	1 1/4	6	1	1	92
8	25-28	16 1/4	18 1/4	17 1/4	6 1/4	3 1/4 x 4 1/4	18 1/4	2 1/4	2 1/4	8	1	1 1/4	130
10	31-34	18 1/4	20 1/4	19 1/4	7 1/4	3 1/4 x 4 1/4	20 1/4	2 1/4	2 1/4	8	1	1 1/4	256
12	37-40	20 1/4	22 1/4	21 1/4	8 1/4	3 1/4 x 4 1/4	22 1/4	2 1/4	2 1/4	8	1 1/4	1 1/4	332
15	43-46	22 1/4	24 1/4	23 1/4	9 1/4	3 1/4 x 4 1/4	24 1/4	2 1/4	2 1/4	8	1 1/4	1 1/4	355
18	49-52	24 1/4	26 1/4	25 1/4	10 1/4	3 1/4 x 4 1/4	26 1/4	2 1/4	2 1/4	8	1 1/4	1 1/4	275
20	55-58	26 1/4	28 1/4	27 1/4	11 1/4	3 1/4 x 4 1/4	28 1/4	2 1/4	2 1/4	8	1 1/4	1 1/4	295
25	63-66	30 1/4	32 1/4	31 1/4	13 1/4	3 1/4 x 4 1/4	32 1/4	2 1/4	2 1/4	8	1 1/4	1 1/4	345

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Model BC Locking Type

The Model BC is a multi-purpose beam clamp suitable for both lifting beams or providing suspension of hoists from beams or girders, thereby eliminating the need for nuts, bolts and shackles. It is intended for use on the American standard or wide flange beams.



OPTION: Now available with soft jaw inserts. Factory installed at time of order or as a Retrofit Kit for customer installation

MODEL BC EXPLODED VIEW

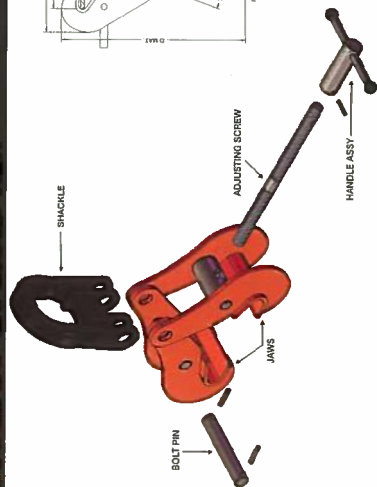

SPECIFICATIONS (in inches)

Working Load Limit at 0°-20° Vertical Temp.	Flange Width A	Flange Thickness B	C	D	E	F	G	H	Weight (in pounds)
11/2	3-7 1/2	1/4-5/8	113/4	3	1/2	5	53/4	9 1/2	
3	3-7 1/2	1/4-5/8	117/8	12	3	5/8	53/16	63/4	13 1/2
5	6-10	1/2-7/8	117/8	17	147/8	31/4	65/16	63/4	22 1/2
10	6-12	1/2-1 1/4	211/4	197/8	4	1 1/2	7 1/8	9	53
15	8-18	7/8-2	261/2	4 1/2	1 3/4	8 3/8	12	15	120
25	18-40	2-3	61	40 1/2	5	2	15	15	450

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.