

SP JOIST HANGERS

The SP joist hanger is the most economical and easy to use of all our hanger products. By simply hammering in the speed prongs, you can eliminate the need for nailing the joist to the hanger. Refer to the chart below for further information concerning maximum load values.

MATERIAL AND FINISH: 18 gauge galvanized steel.

CODE CERTIFICATIONS: ICBO #2039, L.A. CITY #RR233888. Dade County #89-07266.

STOCK NUMBER	JOIST SIZE	DIMENSIONS (INCHES)			NAIL SCHEDULE		I.C.B.O. LOADS (LBS.) ¹	
		D	W	H	HEADER	JOIST	NORMAL	MAX.
SP24	2x4/6	1½	1⅞	3	4-16d	2 PRONGS	535	670
SP26	2x6/8/10	2	1⅞	5⅞	6-16d	4 PRONGS	800	1000
SP28	2x8/10/12	2	1⅞	7	8-16d	6 PRONGS	1070	1340
SP210	2x10/12/14	2	1⅞	8⅞	10-16d	6 PRONGS	1340	1400

¹ See general note (4), page 1.

SU/SUH/SLU JOIST HANGERS



SU Series Hangers are the most popular of the joist hanger line. They are ideal for framing floors, decks, patio covers, carports and other common applications. This efficient and economical joist hanger is designed to satisfy most common load requirements.

MATERIAL AND FINISH:

- SU - 18 gauge galvanized steel.
- SUH - 16 gauge galvanized steel.
- SLU - 20 gauge galvanized steel.




CODE CERTIFICATIONS: ICBO #2039, L.A. CITY #RR23888.

STOCK NUMBER	JOIST SIZE	DIMENSIONS (INCHES)			NAIL SCHEDULE		I.C.B.O. LOADS (LBS.) ¹		
		D	W	H	HEADER	JOIST	NORMAL	MAX.	UPLIFT ²
SU24	2x4	1½	1⅞	3	4-16d	2-N9	540	675	290
SU26	2x6/8	1½	1⅞	4⅞	6-16d	4-N9	810	1015	580
SU28	2x8/10	2	1⅞	7	8-16d	6-N9	1080	1350	870
SU210	2x10/12/14	2	1⅞	8⅞	10-16d	6-N9	1350	1690	870
SU34	3x4	2	2⅞	3⅞	6-16d	2-N9	805	1005	290
SU36	3x6/8	2	2⅞	5⅞	8-16d	4-N9	1072	1340	580
SU44	4x4	2	3⅞	2⅞	6-16d	2-10d	805	1005	315
SU46	4x6/8	2	3⅞	4⅞	8-16d	4-10d	1070	1340	625
SU242	2-2x4	2	3⅞	3⅞	6-16d	2-10d	805	1005	315
SU262	2-2x6/8	2	3⅞	5⅞	8-16d	4-10d	1070	1340	625
SU282	2-2x8/10	2	3⅞	7	10-16d	6-10d	1340	1675	940
SUH310	3x10/12	2	2⅞	8⅞	14-16d	6-N9	1875	2345	870
SUH314	3x14/16	2	2⅞	10⅞	16-16d	6-N9	2145	2680	870
SUH410	4x10/12	2	3⅞	8⅞	14-16d	6-10d	1875	2345	940
SUH414	4x14/16	2	3⅞	9⅞	16-16d	6-10d	2145	2680	940
SUH2102	2-2x10/12/14	2	3⅞	8⅞	14-16d	6-10d	1875	2345	940
SUH2142	2-2x14/16	2	3⅞	10⅞	16-16d	6-10d	2140	2675	940
SLU24	2x4	1½	1⅞	3	4-16d	2-N9	540	675	290
SLU26	2x6/8	1½	1⅞	4⅞	6-16d	4-N9	810	1015	580
SLU28	2x8/10	1½	1⅞	6⅞	8-16d	6-N9	1080	1350	870
SLU210	2x10/12/14	1½	1⅞	7⅞	10-16d	6-N9	1350	1690	870

¹ See general note (4), page 1.

² Allowable uplift loads include a 33% increase for wind or seismic conditions, no further increase allowed.

SILVER

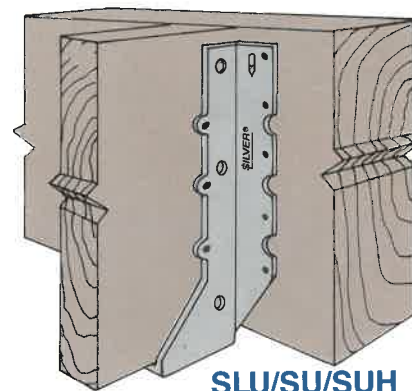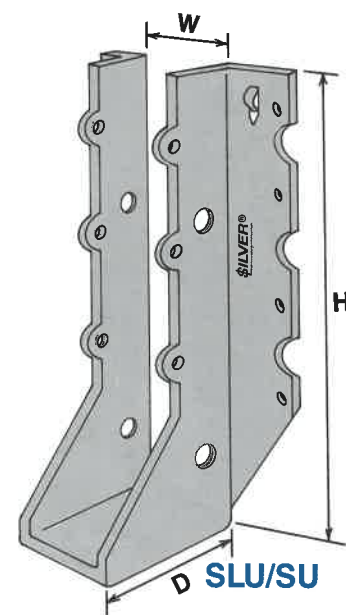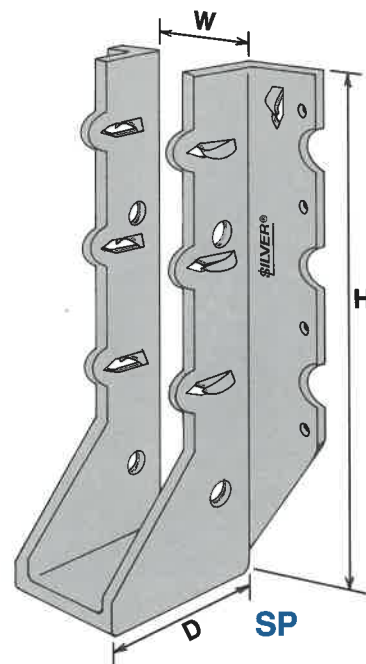

SLU/SU/SUH