

SIP Trunk Profile

Profile Name: Mobicom_MobileOffice

Account/Authentication Required: ☒

Domain Name: mobileoffice.mn

SIP Transport Protocol: UDP

Registrar

Use Registrar: ☒

IP Address / Host name: mobileoffice.mn

Specify Port: ☒

Port: 5060

Reregistration Interval (sec) 120

Proxy

IP Address / Host name: 202.131.248.20

Specify Port: ☒

Port: 5060

Outbound Proxy

Use Outbound Proxy: ☒

IP Address / Host name: 202.131.248.20

Specify Port: ☒

Port: 5060

Inbound Proxy

Use Inbound Proxy: ☐

IP Address / Host name: 0.0.0.0

Specify Port: ☐

- Voice Gateway
 - H.323 Parameters
 - SIP Parameters
 - Codec Parameters
 - IP Networking Mode
 - SIP Trunk Profile Parameter
 - SIP Trunk Profiles
 - AT&T FlexReach
 - AT&T VoEVPN
 - Belgacom
 - Broadsoft
 - COLT
 - DS-COM
 - DS-COM_Pilot
 - Elisa
 - Entel NGN
 - HiPath MobileConnect
 - MediatrixGateway
 - Mobicom_MobileOffice
 - +97675779982
 - NatTrkEnterprise
 - NatTrkWithoutRegistration
 - NatTrkWithRegistration
 - NeoTel Austria

Account Name

Account Name: +97675779982

Authorization name: +97675779982@mobileoff

Provider Name: Mobicom_MobileOffice

New Password:

Confirm Password:

Apply

Undo

- Voice Gateway
 - H.323 Parameters
 - SIP Parameters
 - Codec Parameters
 - IP Networking Mode
 - SIP Trunk Profile Parameter
 - SIP Trunk Profiles
 - AT&T FlexReach
 - AT&T VoEVPN
 - Belgacom
 - Broadsoft
 - COLT
 - DS-COM
 - DS-COM_Pilot
 - Elisa
 - Entel NGN
 - HiPath MobileConnect
 - MediatrixGateway
 - Mobicom_MobileOffice
 - +97675779982
 - NatTrkEnterprise
 - NatTrkWithoutRegistration
 - NatTrkWithRegistration
 - NeoTel Austria



SIP Trunk Profile Parameter

SIP Protocol Variant for IP Networking: Native SIP

Use Profiles for Trunks via Native SIP: Yes

- Voice Gateway
 - H.323 Parameters
 - SIP Parameters
 - Codec Parameters
 - IP Networking Mode
 - SIP Trunk Profile Parameter
 - SIP Trunk Profiles
 - AT&T FlexReach
 - AT&T VoEVPN
 - Belgacom
 - Broadsoft
 - COLT
 - DS-COM
 - DS-COM_Pilot
 - Elisa
 - Entel NGN
 - HiPath MobileConnect
 - MediatrixGateway
 - Mobicom_MobileOffice
 - +97675779982
 - NatTrkEnterprise
 - NatTrkWithoutRegistration
 - NatTrkWithRegistration
 - NeoTel Austria

Codec Parameters

Codec	Priority	Voice Activity Detection	Frame Size
G.711 A-law	Priority 1	VAD: <input checked="" type="checkbox"/>	20 msec
G.711 μ-law	not used	VAD: <input type="checkbox"/>	30 msec
G.723	Priority 3	VAD: <input type="checkbox"/>	30 msec
G.729	not used	VAD: <input type="checkbox"/>	20 msec
G.729A	Priority 2	VAD: <input type="checkbox"/>	20 msec
G.729B	not used	VAD: <input checked="" type="checkbox"/>	20 msec
G.729AB	Priority 7	VAD: <input checked="" type="checkbox"/>	20 msec

T.38 Fax


T.38 Fax: ☒
 Use FillBitRemoval: ☒
 Max. UDP Datagram Size for T.38 Fax (bytes): 1472
 Error Correction Used for T.38 Fax (UDP): t38UDPRedundancy

Misc.

ClearMode (ClearChannelData): ☒
 Frame Size: 20 msec

RFC2833

Transmission of Fax/Modem Tones according to RFC2833: ☒
 Transmission of DTMF Tones according to RFC2833: ☒
 ClearChannel 96
 Payload Type for RFC2833 98
 Payload Type for RFC2198
 (= 'Payload Type for RFC2833' + 1) 99
 Redundant Transmission of RFC2833 Tones according to RFC2198: ☒

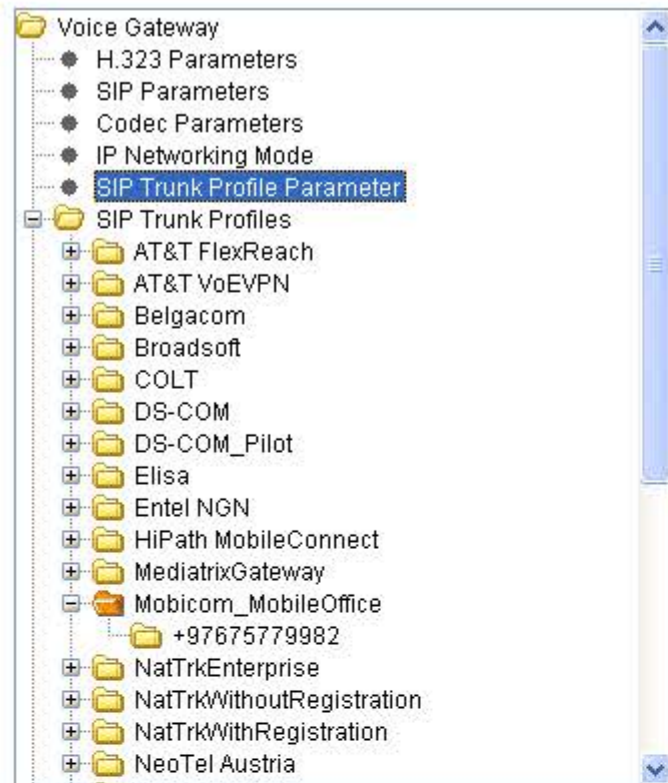

SIP Trunk Profile Parameter

SIP Protocol Variant for IP Networking: Native SIP

Use Profiles for Trunks via Native SIP: ☒

Apply

Undo