



DO NOT overhang  
rim on wall.



TimberStrand® LSL  
rim board

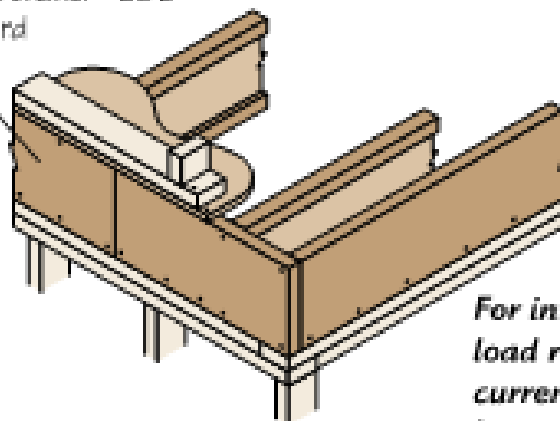

*For information on lateral  
load resistances refer to  
current Trus Joist rim board  
literature*


## Exterior Deck Attachment

Structural exterior  
sheathing

Flashing

Treated  
2x\_ ledger

Trus Joist rim board

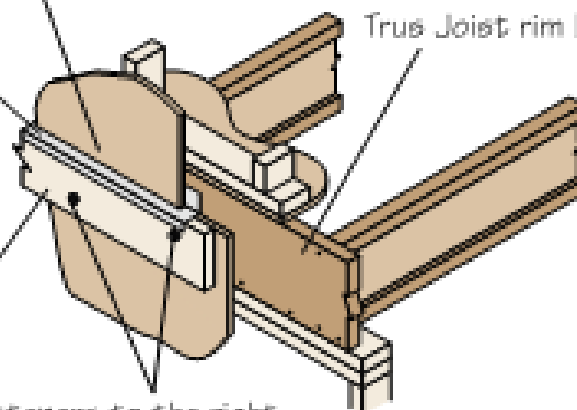

See fasteners to the right.  
Maintain 2" distance (minimum)  
from edge of ledger to fastener.

Fastener	Factored Resistance (lbs)(1)
	1 1/4" Rim Board
3/8" lag bolt	630
1/2" lag bolt	750

(1) Factored resistance determined in  
accordance with AC 124.

• Corrosion-resistant fasteners required  
for wet-service applications.

LA

Load bearing wall above

**Intermediate Bearing—**