



KEEPING PAD

EA



SCALE

- 9 USE EPOXY GROUT BELOW EQUIPMENT, INSTALLED PER SPEC SECTION 11002 AFTER LEVELING OF BASE PLATE, SOLE PLATE OR MOUNTING BLOCK.
- 10 WHERE EQUIPMENT REQUIRES AN ANCHOR GREATER THAN 3 INCH EMBEDMENT, THE ENTIRE EMBEDMENT LENGTH SHALL BE IN THE SUPPORTING SLAB, EXCLUDING DEPTH OF EQUIPMENT PAD.

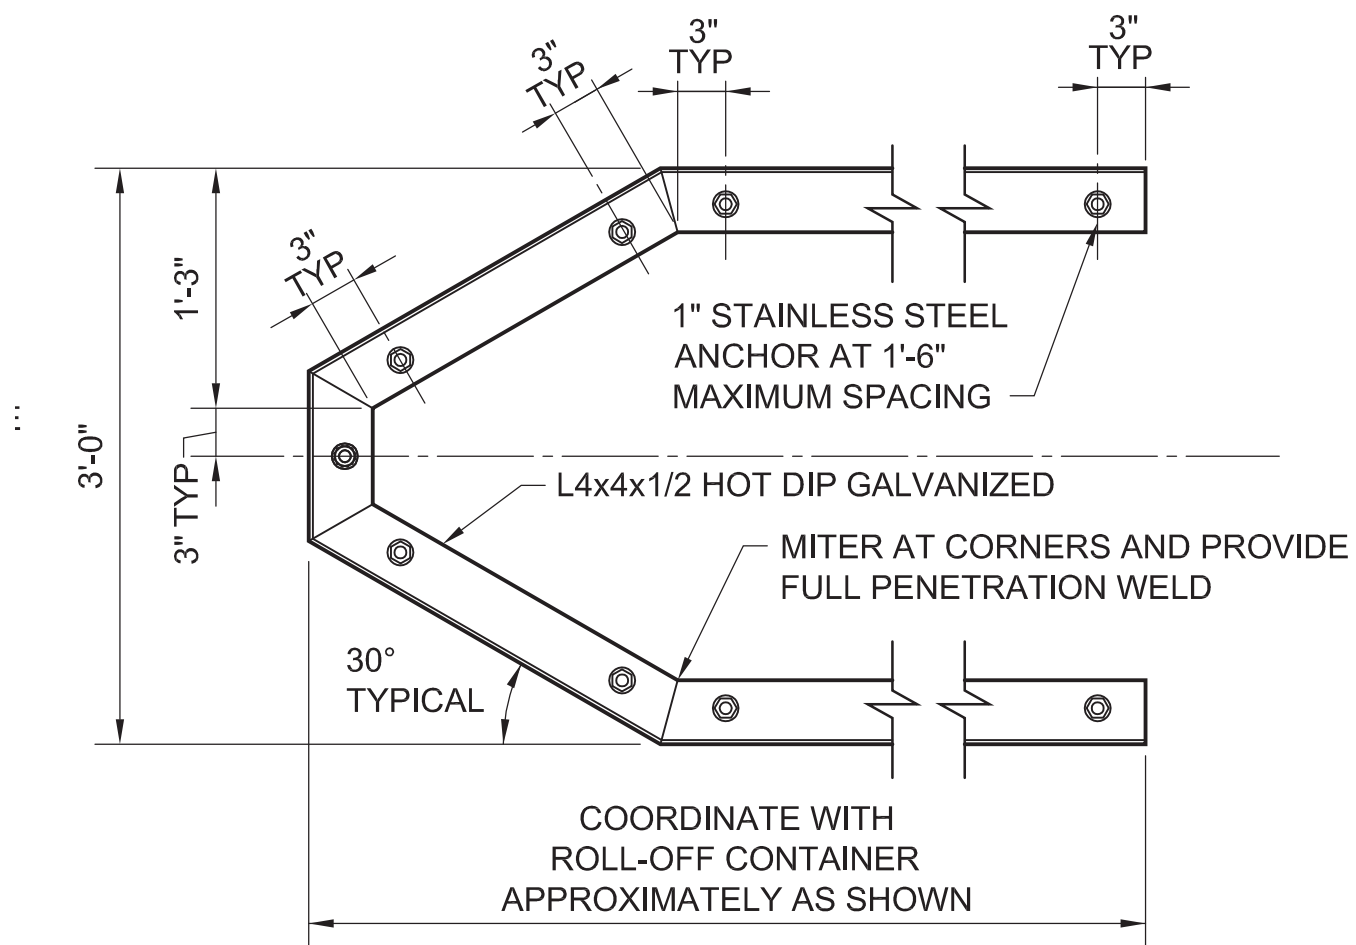


ROLL-OFF CONTAINER  
GUIDE RAIL - PLAN

DETAIL



NO SCALE

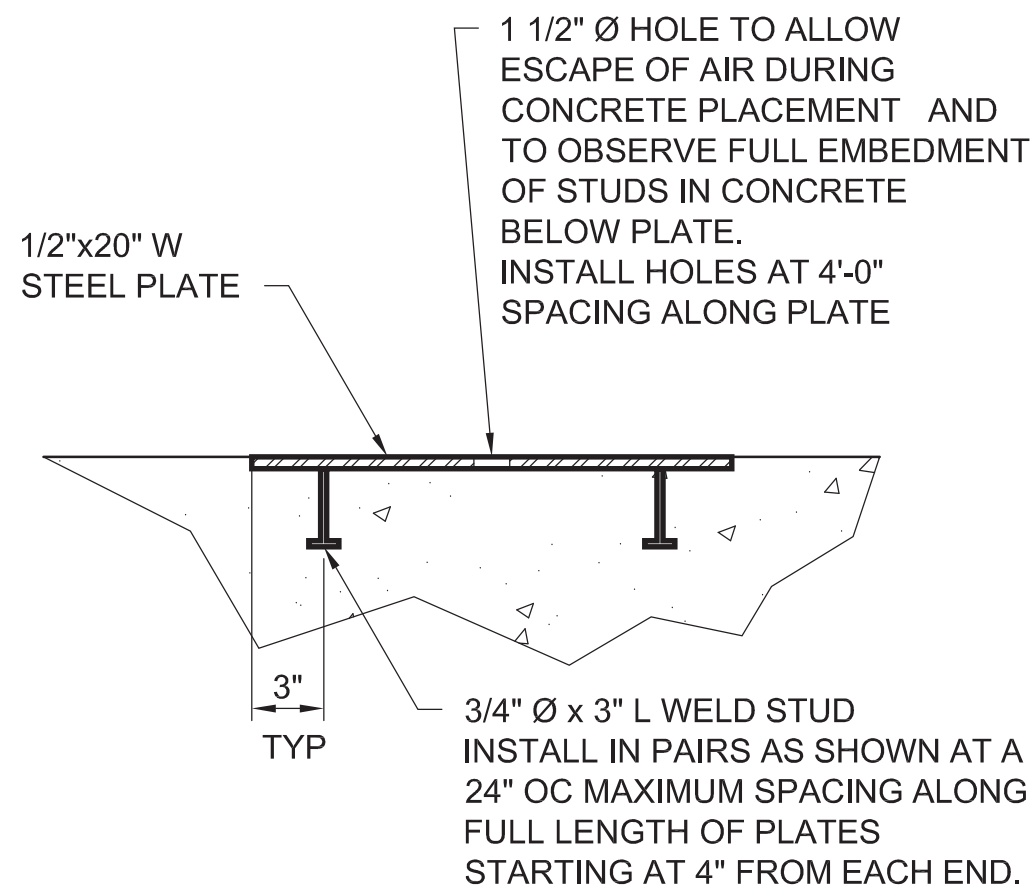

NOTE:  
SECURE PLATE IN POSITION PRIOR TO PLACEMENT OF CONCRETE. DO NOT "SET" PLATES IN FRESH CONCRETE. PLATE SURFACE TO BE FLUSH WITH CONCRETE SURFACE.

ROLL-OFF CONTAINER  
WEAR PLATES - SECTION

DETAIL



NO SCALE

6

5

4

3

2

