
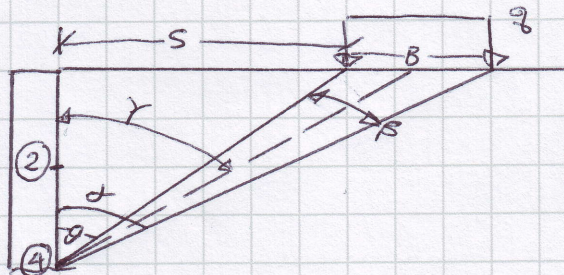


Design example:

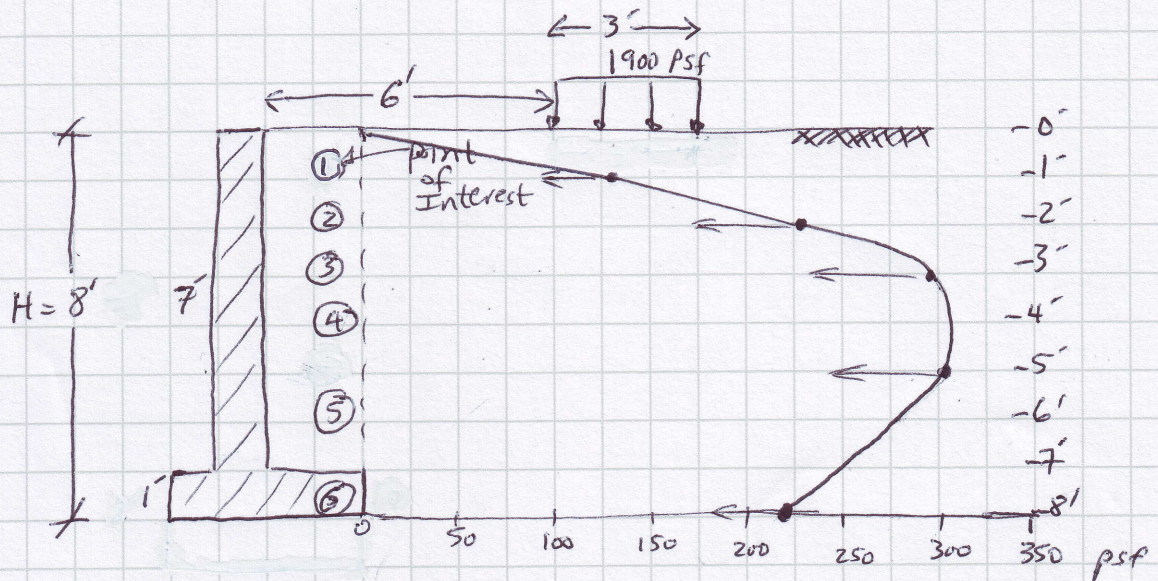

$$[1 \text{ Rad} = \frac{180}{\pi} = 57.2956^\circ]$$

At (4), $\Delta H = 4'$

$$\alpha = \tan^{-1} \left(\frac{S+B}{\Delta H} \right) \text{ Rad} = \left[\tan^{-1} \left(\frac{6'+3'}{4'} \right) \right] = 1.153 \text{ Rad} = 66.04^\circ$$

$$\theta = \tan^{-1} \left(\frac{S}{\Delta H} \right) \text{ Rad} = \left[\tan^{-1} \left(\frac{6'}{4'} \right) \right] = 0.983 \text{ Rad} = 56.31^\circ$$

$$\beta = \alpha - \theta = 66.04^\circ - 56.31^\circ = 9.73^\circ = 0.17 \text{ Rad}$$

$$\sigma_1 = \frac{q}{\pi} (\beta + \sin \beta) = \frac{1900}{3.1416} (0.17 + \sin 0.17) = 204.9 \text{ psf}$$

$$\sigma_2 = \frac{q}{\pi} (\beta - \sin \beta) = \frac{1900}{3.1416} (0.17 - \sin 0.17) = 0.5 \text{ psf} \quad \text{In Radians.}$$

$$\gamma = \frac{\alpha + \theta}{2} = \frac{1.153 + 0.983}{2} = 1.068 \text{ Rad} = 61.19^\circ$$

Job No. _____ Date: 4/20/11 Client: _____ Sheet 2 of 2

Project: Strip Load Surcharge Computation Designed by: LAA

Lateral stress @ -4 ft = P_{sur} .

$$P_{sur} = 2(\sigma_1 \sin^2(\gamma) + \sigma_2 \cos^2(\gamma))$$
$$= 2(204.9 \sin^2(1.068) + 0.5 \cos^2(1.068))$$

↑ radians ↑

$$= 314.7 \text{ psf (←)}$$

So if we did this for 1', 2', 3', 4', 5' and 8', we get the following:

<u>Depth, ft</u>	<u>Lateral Stress, psf</u>
1'	129.3
2'	231.4
3'	292.6
4'	314.7
5'	308.0
8'	222.3

Contrary to some practice, there will be lateral stresses on the retaining structure, even if strip load is at a distance greater than 1.0 H.