
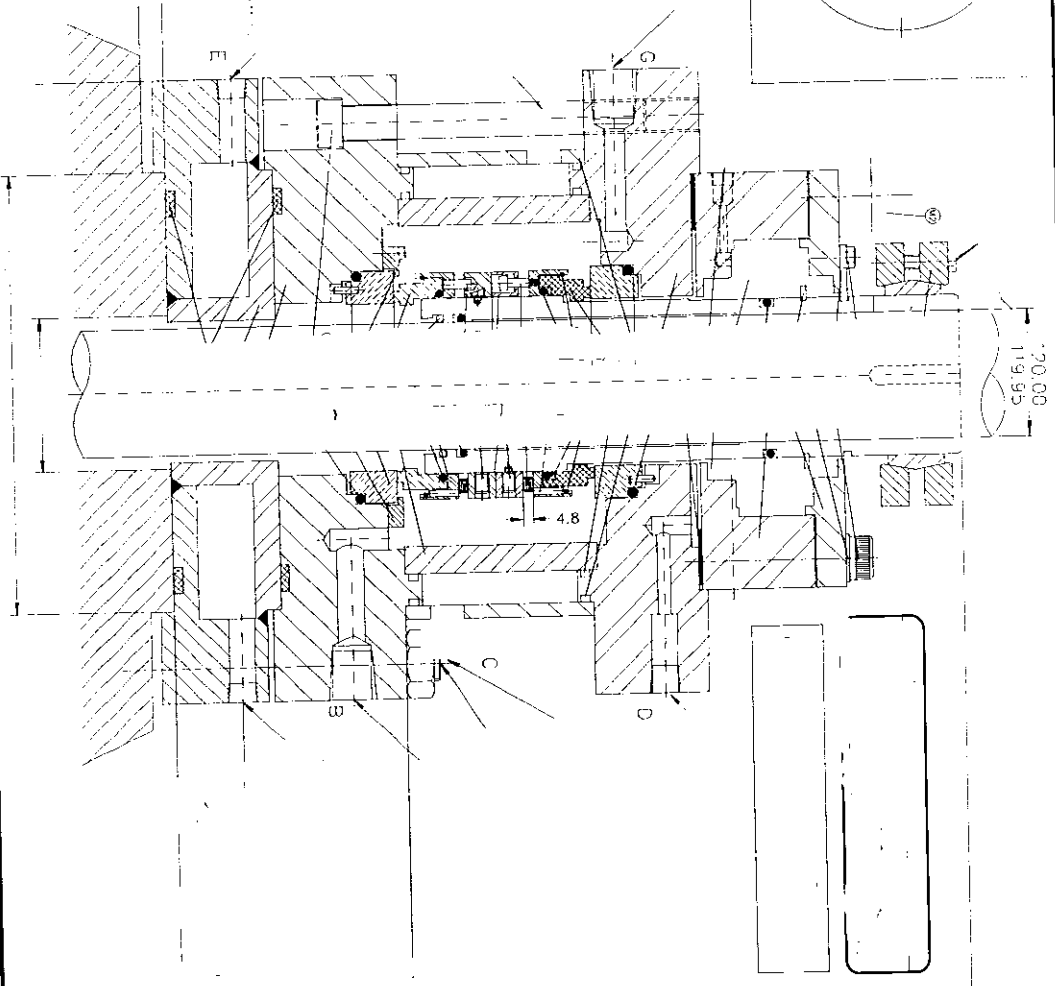


ENVIRONMENT CONTROL			
APPL PLAN	54	JACKETED HSC	
FLUSH FLUID	COMPATIBLE FLUID	OIL	(R)
FLUSH PRESS	2KG/CM ² ABOVE VESSEL PR	1 KG/CM ²	(R)
FLUSH TEMP	AMBIENT	40°C	(R)
FLUSH RATE	8-10 LPM	20-25 LPM	



EQUIPMENT ITEM NO.		EQUIPMENT TYPE & SIZE		TOP ENTRY AGITATOR		SERIAL NO.	
		PRODUCT: ISO-BUTYL BENZENE		OPERATING PRESS 41 KG/SQ.CM		TEMP OPER 180°C	
		DESIGN PRESS 44 KG/SQ.CM		TEMP DESIGN 200°C		R.P.M. 300	