

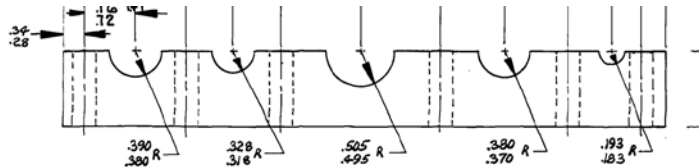


1. Typical rectangular NBR [rubber] Fairlead 1/2-block...

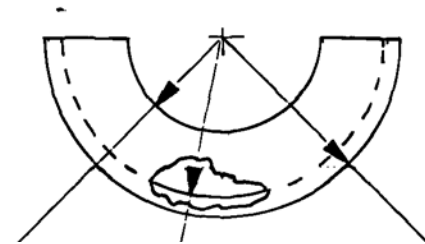

2X-Fairleads are typically mounted within 2X aluminum u-channels on the straight-sides held together with 3/16 Thru-bolts

2. Here is the 'grommet-shaped' Fairlead 1/2-block that is out-of-stock and seems to be our specific manufacturing 'problem-child' for vendors [lots of 'NO-BID' replies]...

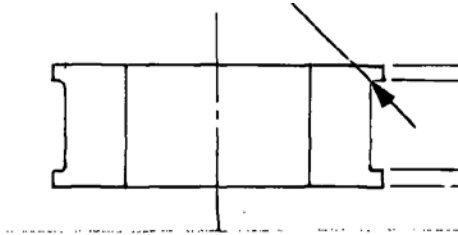

3. here is how the 2X Fairleads are mounted in 2X Saddle-Band-Clamps that comprise the on-engine Instl....

