
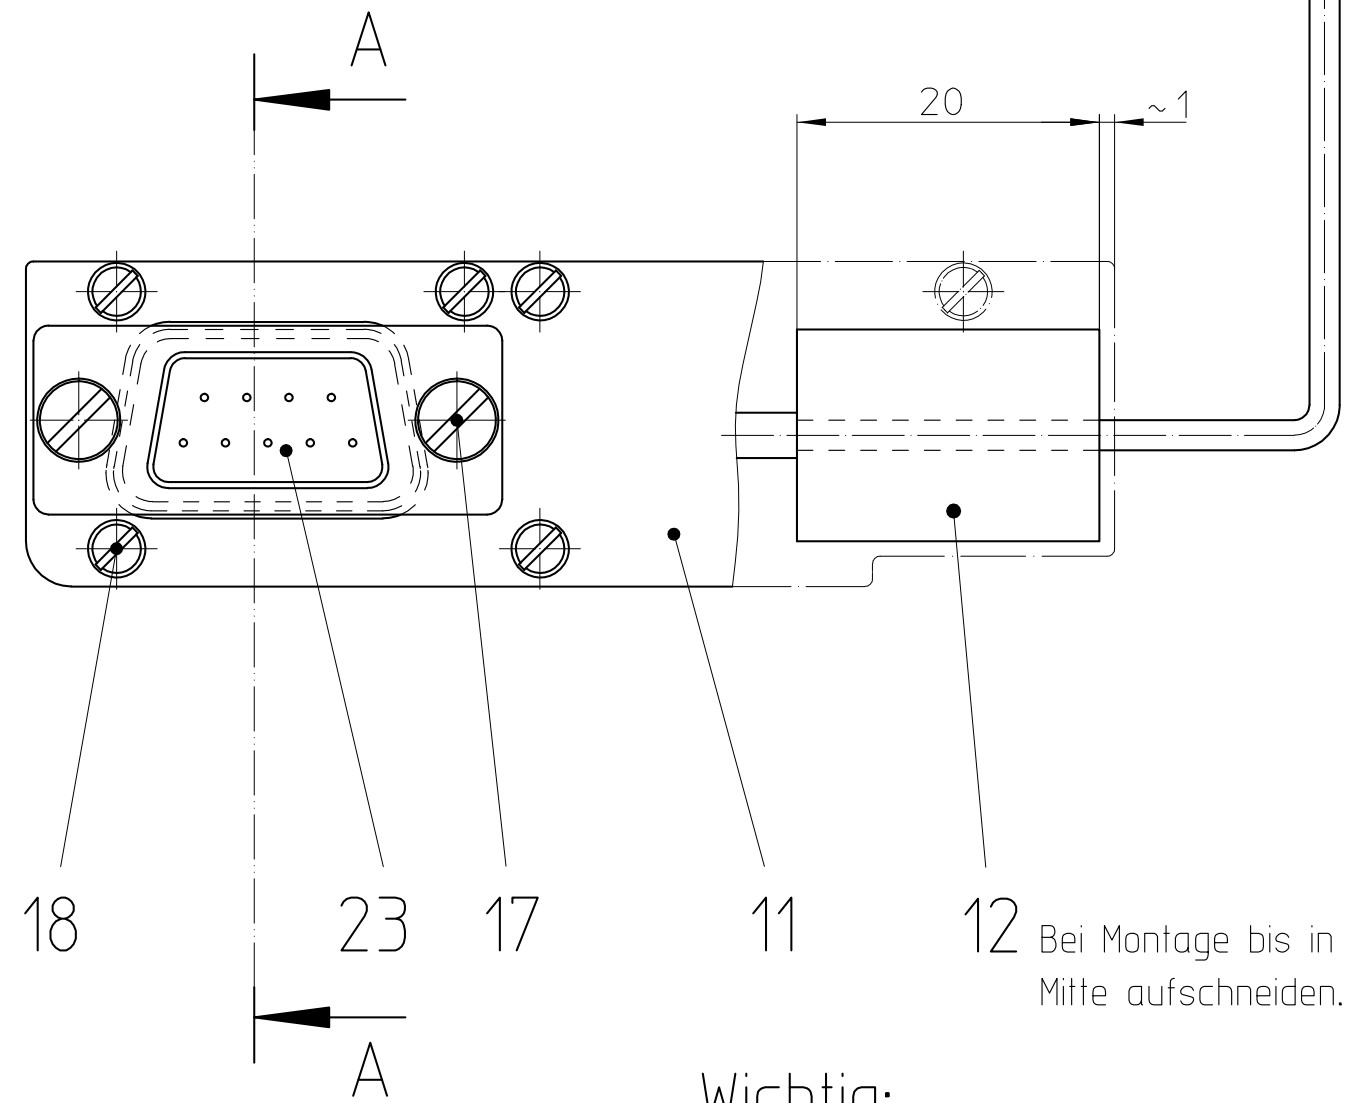
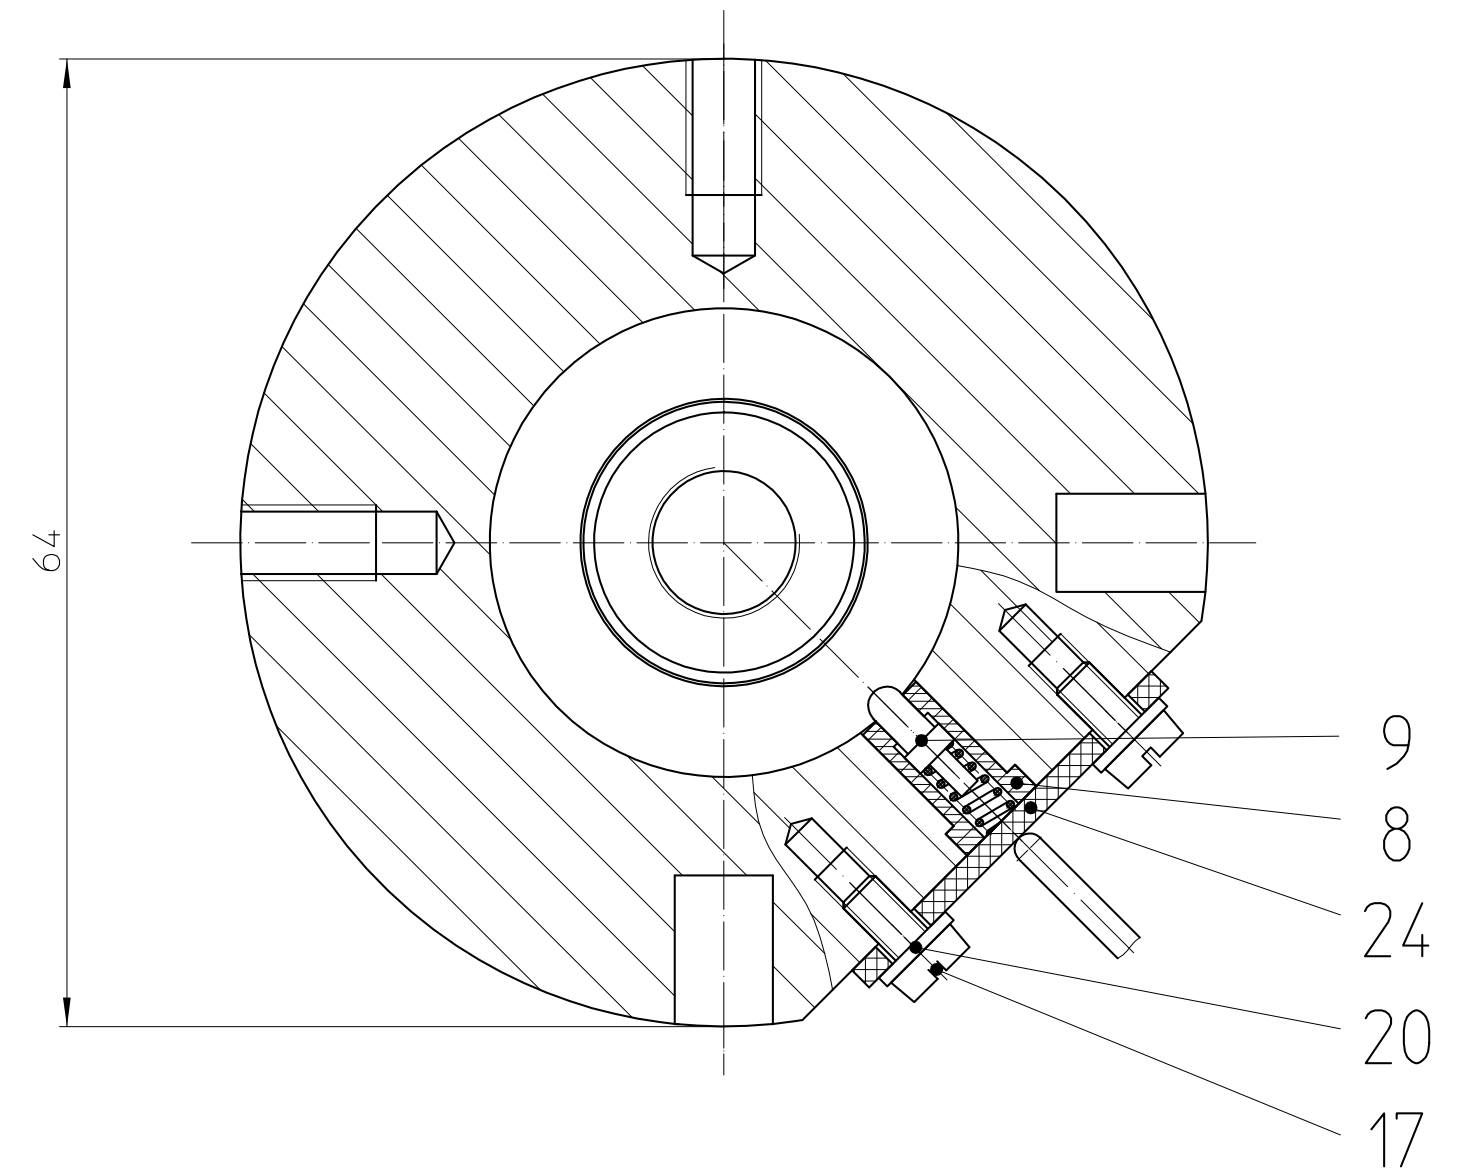
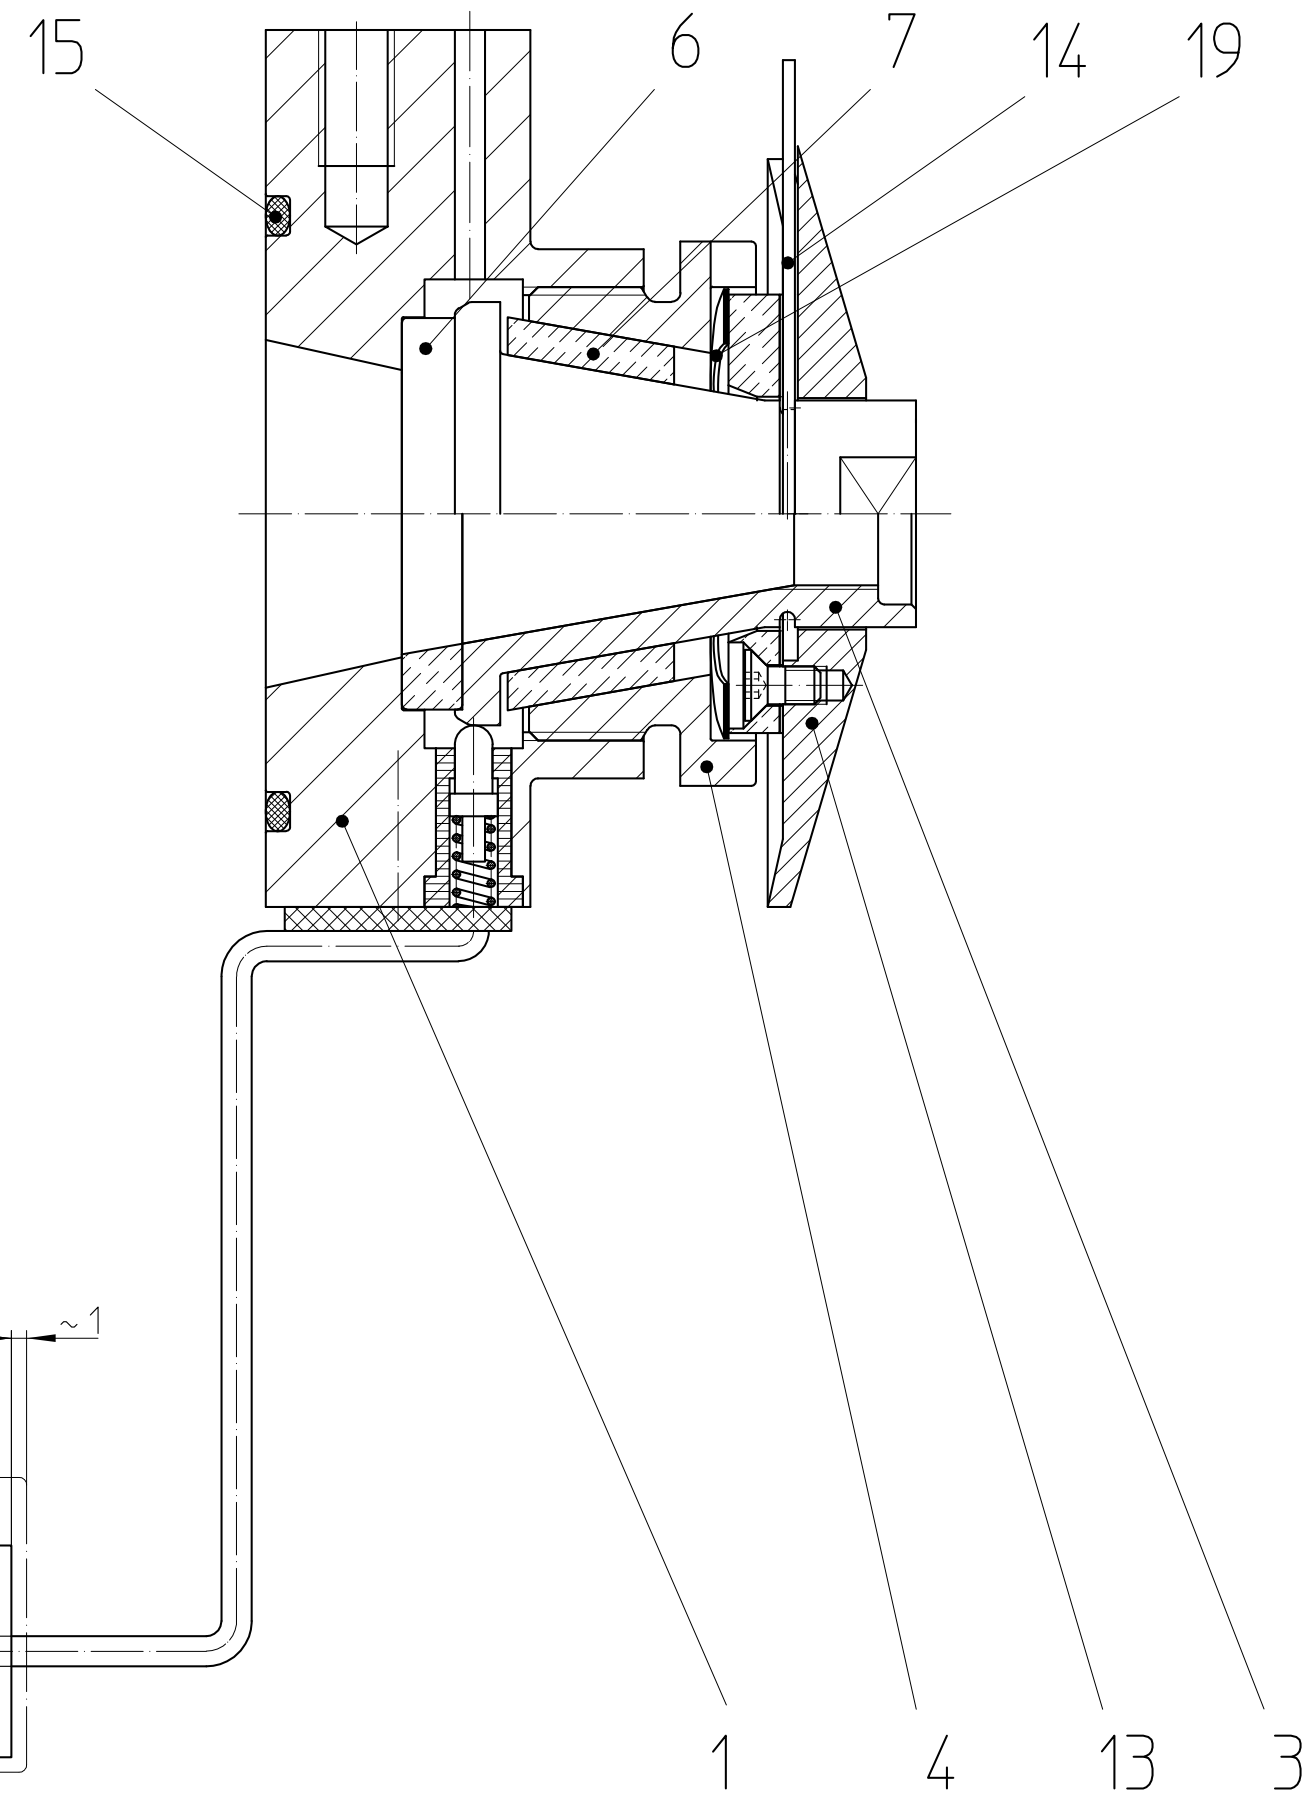



verwendet für
0-02865
0-02866
0-04364
0-04372
0-04384
0-04385

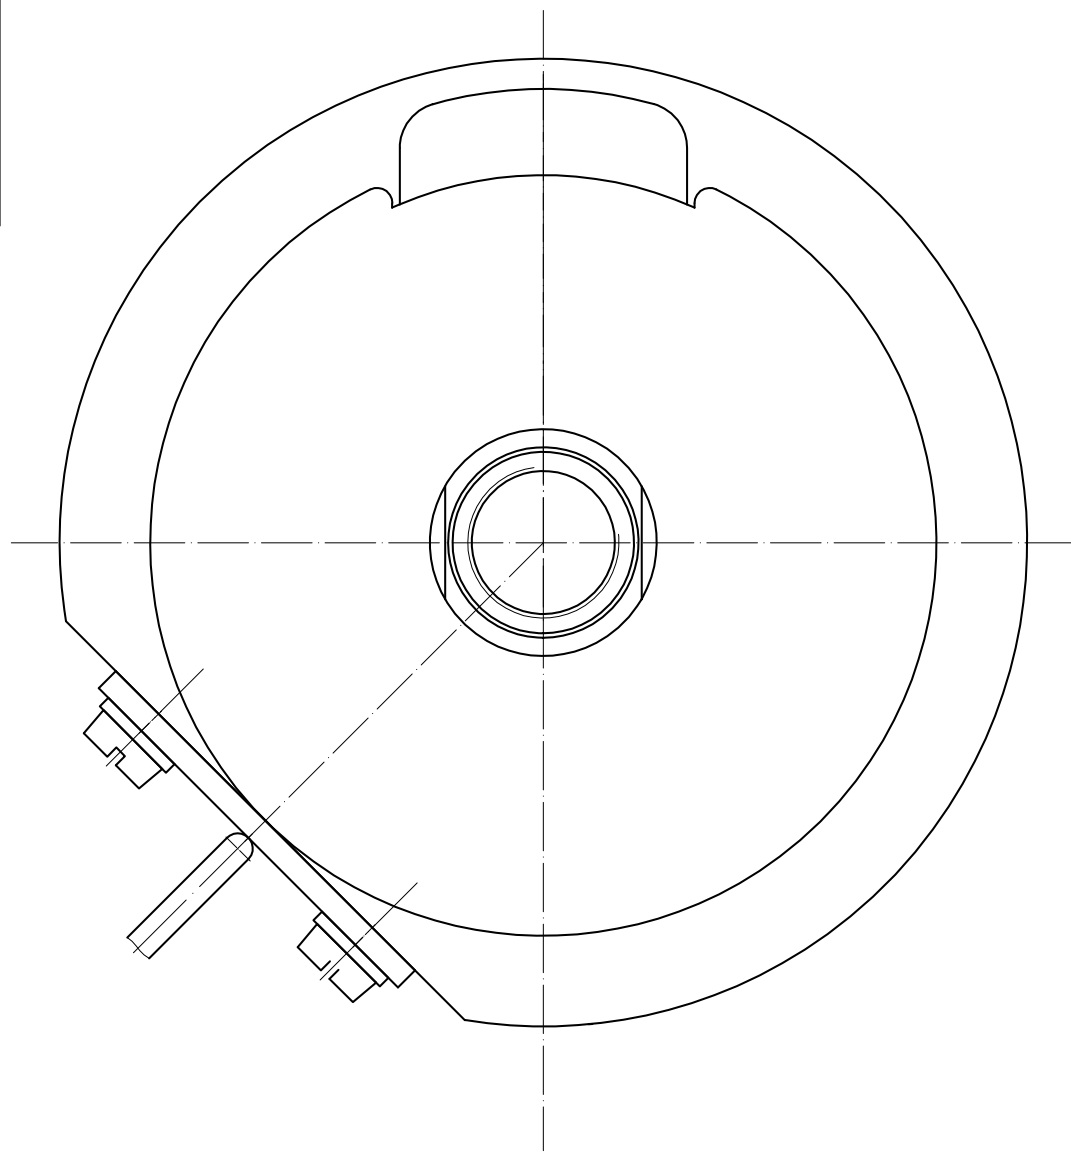

Wichtig:

Pos 11 mit Loctite 574 zum Schneidkopfgehäuse abdichten

Schnitt A-A

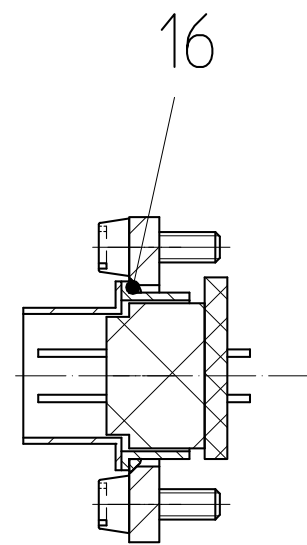

12			Allgemeintoleranz : SN 258440 mittel			Masstab: 2:1		Klassifizierung:						
11						Schutzvermerk nach DIN 34 beachten.								
10														
9														
8	29.05.98	dn		Datum	Name	Kapazitive Abtastung								
7	6.2.96	hw		Gez.	28.01.95						Gr			
6	11.9.95	CM		Gepr.	28.01.95						Gr			
5	16.8.95	mbr	CAD											
4	12.7.95	T.Hess												
3	18.5.95	T.Hess	<b>BYSTRONIC</b> LASER AG, 3362 NIEDERÖRNZ					Blatt 1						
2	27.4.95	T.Hess												
1	22.03.95	Gr						2-03283-8					von 1 Bl.	
Index	Datum	Gepr.												
				Ers.f:			Ers.d:							