



Search:

Water Systems, SSE, Residential Centrifugal - 293 Wright St. Delavan, WI 53115 • Ph: 888-987-8677 • Fax: 800-426-9446
 Canada - 269 Trillium Drive Kitchener, Ontario, Canada N2G 4W5 • Phone: 519-748-5470 • Fax: 519-748-2553

- [Home](#)
- [News](#)
- [Products](#)
- [Services](#)
- [Software](#)
- [Request](#)
- [Contact](#)
- [Locator](#)
- [Login](#)

Pricing

[Price Sheets](#)

S33 Series
1/3 HP Residential Sump Pumps

[Download Product Brochure](#)

[Download Product Manual](#)

Utility Pumps

[DU25](#)

[MCU15/MCU15S/MCU20S Series](#)

[MES106](#)

[SPS-6](#)

[MUSP125](#)

Sump Pumps

[DS Series](#)

[ED-25 Sink Pump System](#)

[ED33 Series](#)

[MCSP Series](#)

[MDC33/MDC50 Series](#)

[S33 Series](#)

[S40HT](#)

[S50HT Series](#)

[SP25 Series](#)

[SP75 Series](#)

[SSM331 Series](#)

[SX50 Series](#)

[PSB1822](#)

[MCI033/MCI050 Series](#)

Battery Back-up Sump

[MBSP Series](#)

[MBSP-Plus Series](#)

Effluent Pumps

[2NFL and J-BE Series](#)

[DE Series](#)

[MD Series](#)



Features and Benefits

- Designed for drain water removal or permanent applications with small amounts of debris
- Wide-angle or vertical mechanical switch for small 10-1/2" diameter sumps
- Oil-filled PSC motor for maximum heat dissipation, continuous bearing lubrication
- Recessed vortex impeller for free flow of liquids and solids
- Thermal overload protection with automatic reset
- Dual ball-bearing motor and additional lip seal provide durability and longer pump life
- Durable PSC motor for years of service

VERSATILITY FOR MANY LIGHT-DUTY JOBS. MAINTENANCE-FREE OPERATION.

Product Capabilities

Capacities:	32 GPM	121 LPM
Shut-Off Head:	25 ft.	7.62 m
Operation:	On Off	10.31 in. 3.31 in. 261 mm 84 mm
Pump-down Range:	7 in.	178 mm
Solids Handling:	1/4 in.	6.4 mm
Liquids Handling:	drain water	
Intermittent Liquid Temp.:	up to 140 °F	up to 60 °C
Motor:	1/3 HP, PSC	
Electrical Data:	3000 RPM, 115V, 6.5A, 1Ø, 60Hz	
Acceptable pH Range:	6-9	
Shaft Seal:	type 11A, carbon & ceramic, secondary lip seal	
Housing:	cast iron	
Power Cord:	10 ft., 20 ft.	
Discharge, NPT:	1-1/2 in.	38.1 mm
Min. Sump Dia. Wide Angle:	18 in.	457 mm

[ME Series](#)

[ME3 Series](#)

[ME40](#)

[P50 and P100 Series](#)

[ME45 Series NEW](#)

Sewage Pumps

[CMV5](#)

[DSW Series](#)

[MW Series](#)

[MW50](#)

[SRM4](#)

[WHR Series](#)

[WHR5H-WHR20H Series](#)

Sewage Package Systems

[CMV1830](#)

[CMV-BP](#)

[SRM-BP](#)

[MW-BP](#)

[MRJ](#)

[SR1830](#)

Grinder Pumps

[MRG20](#)

[MRG20 Grinder Pump Systems](#)

[MRGD200 & MRGD200-Retrofit](#)

[MRGD300 / MRGD500 / MRGD750 Series](#)

[Turnkey Simplex Basin Package](#)

Non-Clog Sewage Pumps

[3MW Series](#)

[3WHV Series](#)

Submersible Well Pumps and Controls


[PRO-Source™ K-Series](#)

[PRO-Source™ PLUS KS-Series](#)

[PRO-Source™ PLUS KSS-Series](#)

[Submersible Motor Controls](#)

Min. Sump Dia. Vertical:	10-1/2 in.	267 mm
--------------------------	------------	--------

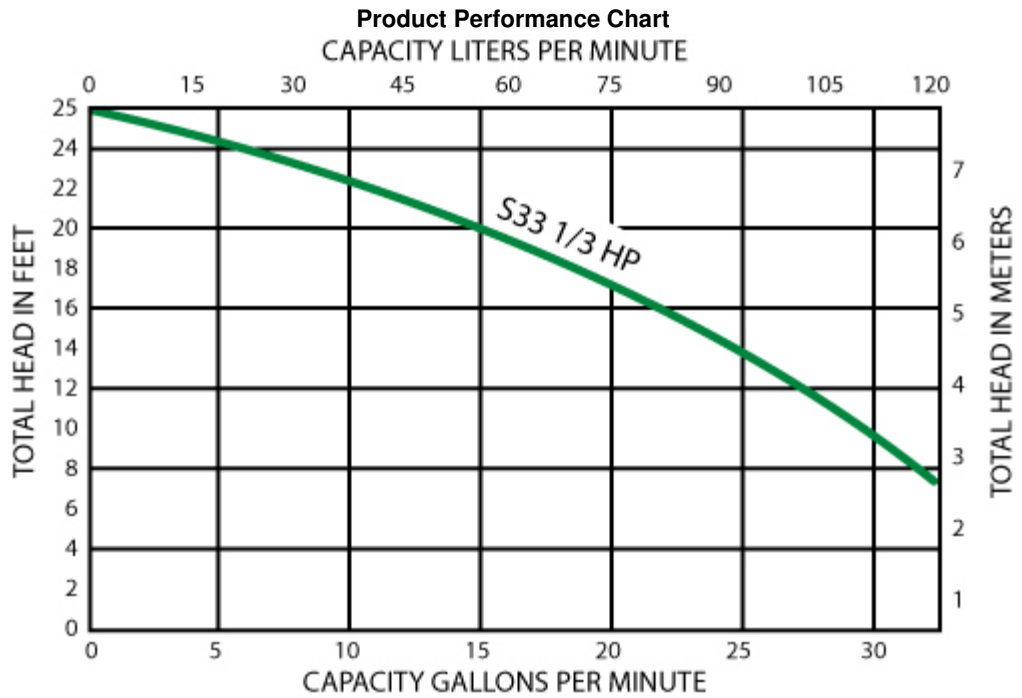

Well Tanks

[PRO-Source™ Steel Pressure Tanks](#)

[PRO-Source™ Epoxy-Lined](#)

Accessories

[EPC Series](#)

[Pro-Source™ Pumper](#)

[Control Panels, Float Controls, Alarms, Check Valves & More](#)

[Electric Controls](#)

[Lift-out Rail System](#)

Related Links

[SWPA](#)

[SSPMA](#)

[PDF Reader Download](#)



**Pentair
Water**

The Myers' Mission...

**Copyright © The Pentair Pump Group
All Rights Reserved**

[Privacy Policy - Terms and Conditions of Use](#)

By using this site, or by accessing any information on this site, you are agreeing to the [Terms and Conditions](#).