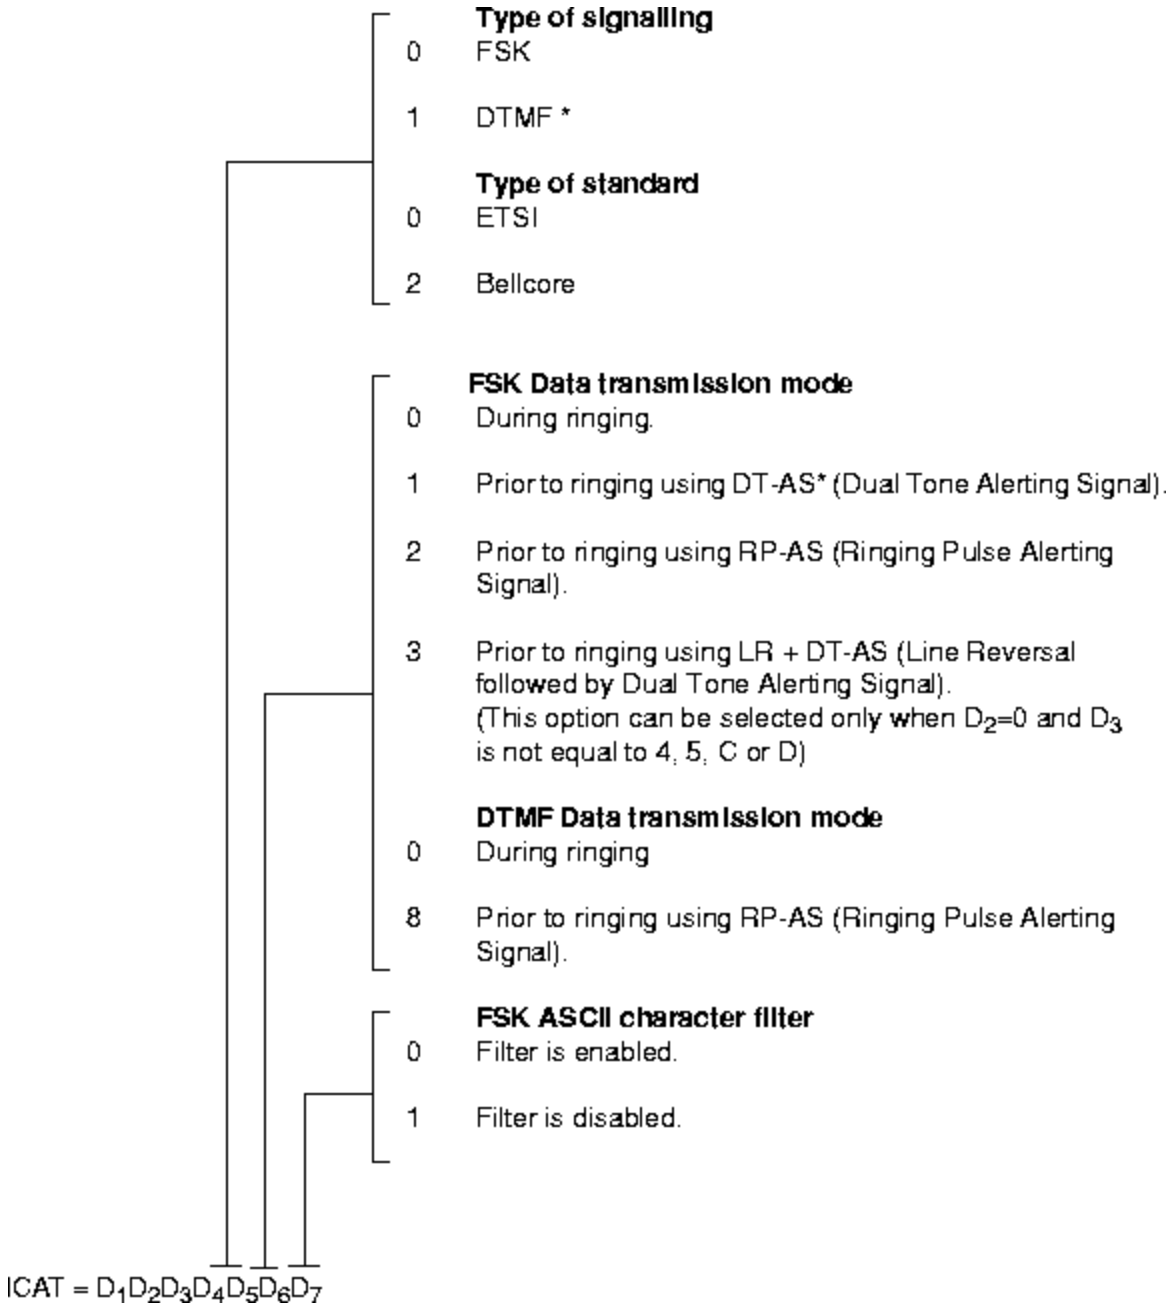
Type of signalling
0 FSK
1 DTMF *
Type of standard
0 ETSI
2 Bellcore
FSK Data transmission mode
0 During ringing.
1 Prior to ringing using DT-AS* (Dual Tone Alerting Signal).
2 Prior to ringing using RP-AS (Ringing Pulse Alerting Signal).
3 Prior to ringing using LR + DT-AS (Line Reversal followed by Dual Tone Alerting Signal).
(This option can be selected only when D2=0 and D3 is not equal to 4, 5, C or D)
DTMF Data transmission mode
0 During ringing
8 Prior to ringing using RP-AS (Ringing Pulse Alerting Signal).
FSK ASCII character filter
0 Filter is enabled.
1 Filter is disabled.
ICAT = D1D2D3D4D5D6D7