



DRAWING:

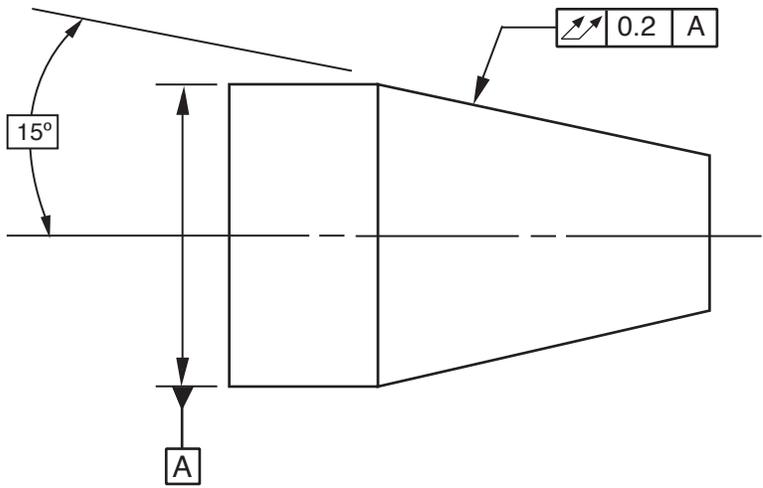

INTERPRETATION:

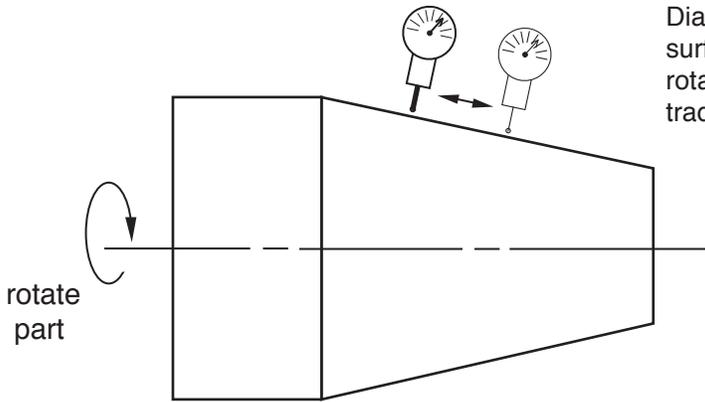

Dial indicator must move along the surface at 15° from the axis of rotation, rather than 0° as in traditional total runout.