


ENVIRONMENT CONTROL

API PLAN	54	JACKETED HSG.
FLUSH FLUID	COMPATIBLE FLUID	OIL
FLUSH PRESS.	2kg/cm ² ABOVE VESSEL. PR	1 Kg/cm ²
FLUSH TEMP.	AMBIENT	40°C
FLUSH RATE	8-10 LPM	20-25 LPM

HT	HEAT TRAP	
K3	CAPSCREW	
M3	WASHER	
M2	EYE BOLTS	
M1	GREASE NIPPLE	
M	BOLT	
OS	OIL SEAL	
BG	BEARING 22224CD	
G3	GASKET	
TA	COVER PLATE	
BH	BEARING HOUSING	
A1	HOUSING	
A	HOUSING	
D1	DRIVE PIN	
S1	DOG PT SETSCREW	
S	SET SCREWS	
H	HOLD RING	
P	SHAFT PACKING	
G1	GASKET	
G2	GASKET	
K	CAP SCREW	
D	DRIVE PIN	
C	SPRING	
K1	CAP SCREW	
BP	BACK UP PLATE	
IH	INSERT HOLDER	
IS	EGG WASHER	
G	SPIRAL WOUND GASKET	
11B	O-RING	
11A	SLEEVE PACKING	
11	SLEEVE PACKING	
10	SLEEVE	
S0	SHRINK DISC ASSY	J1
6	INSERT MTG.	
K2	CAP SCREW	
CP	CIRCLIP	
5	COLLAR	
4	SHROUD	
3	SEAL RING	ANTIMONY CARBON (IMPREGNATED)
2	INSERT	SIL CAR-1
4S	COMPRESSION UNIT	
1	GLAND RING	

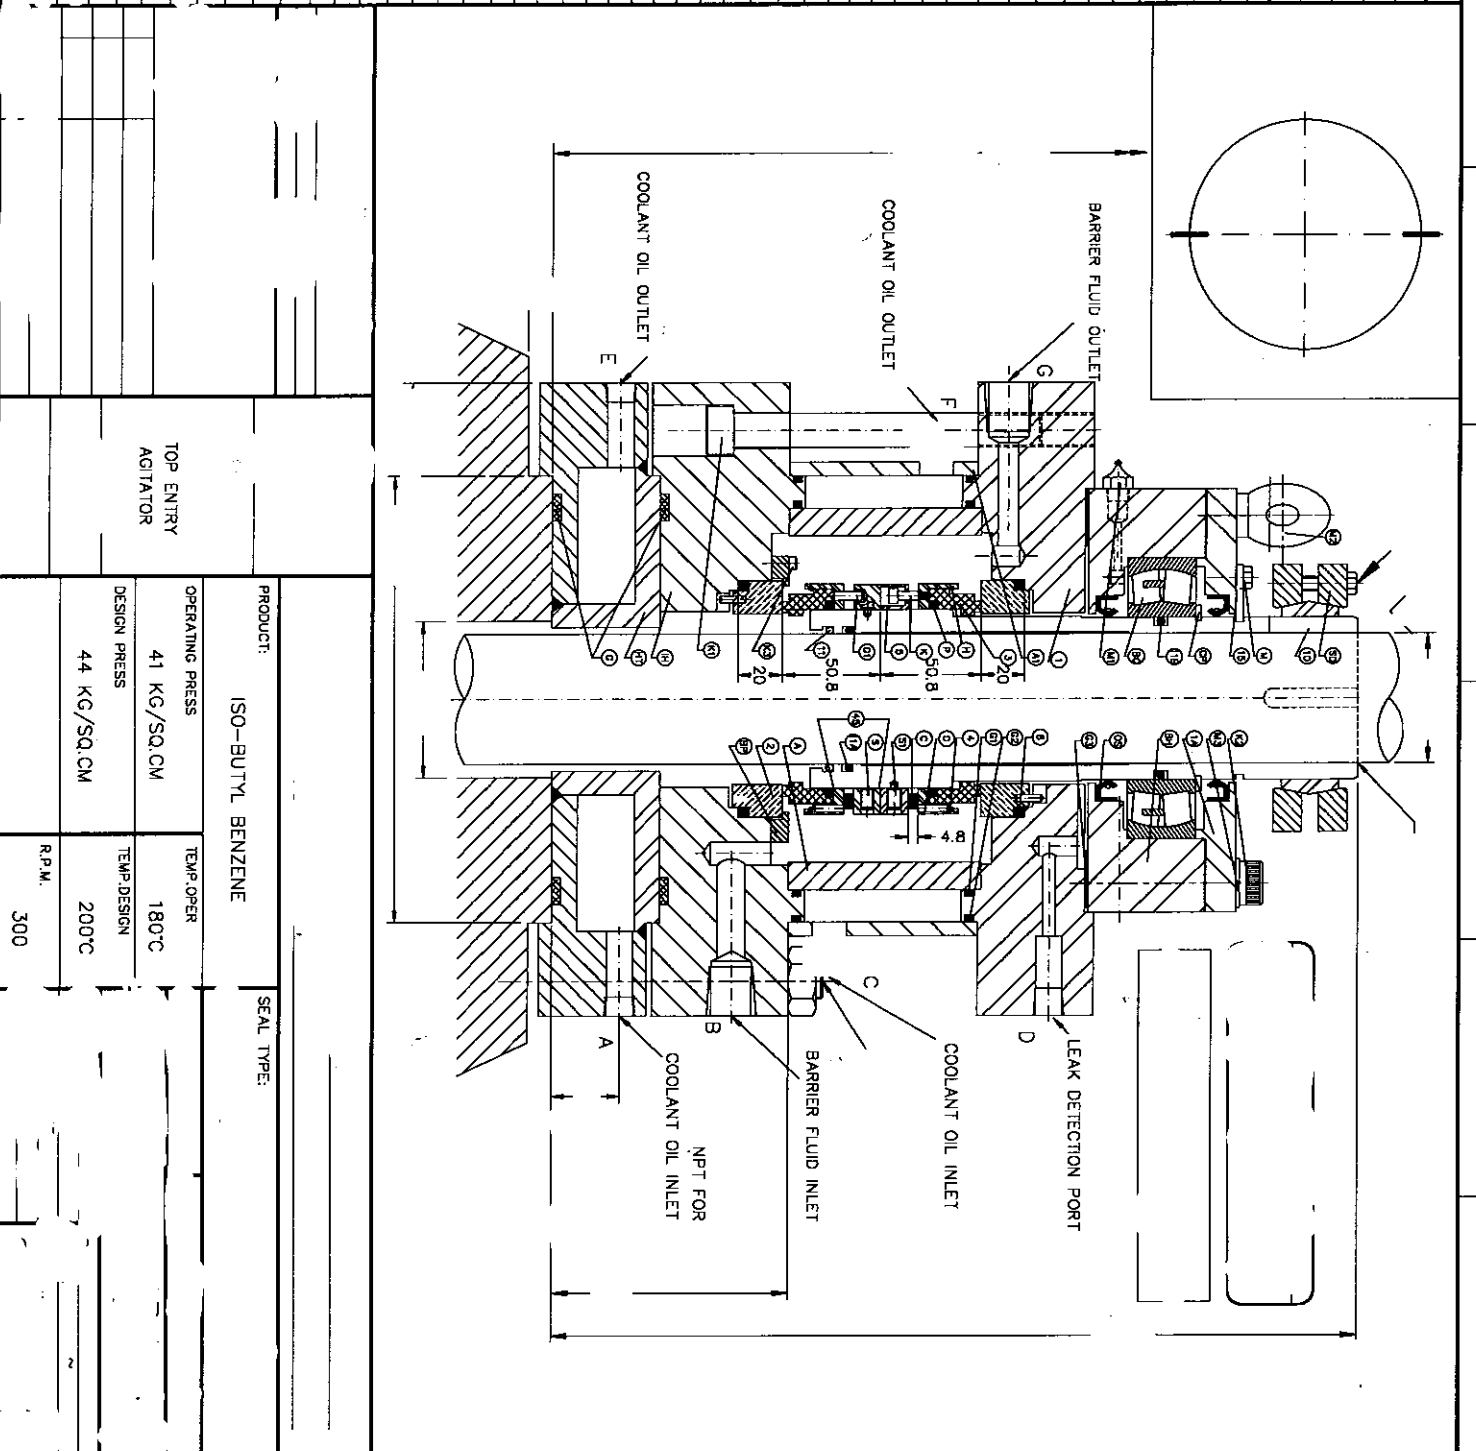

TOP ENTRY
ACTIVATOR

PRODUCT: ISO-BUTYL BENZENE

SEAL TYPE:

OPERATING PRESS
41 KG/SQ.CM

TEMP. OPER
180°C

DESIGN PRESS
44 KG/SQ.CM

TEMP. DESIGN
200°C

R.P.M.
300