


A Beginner's Guide to Fragility, Vulnerability, and Risk

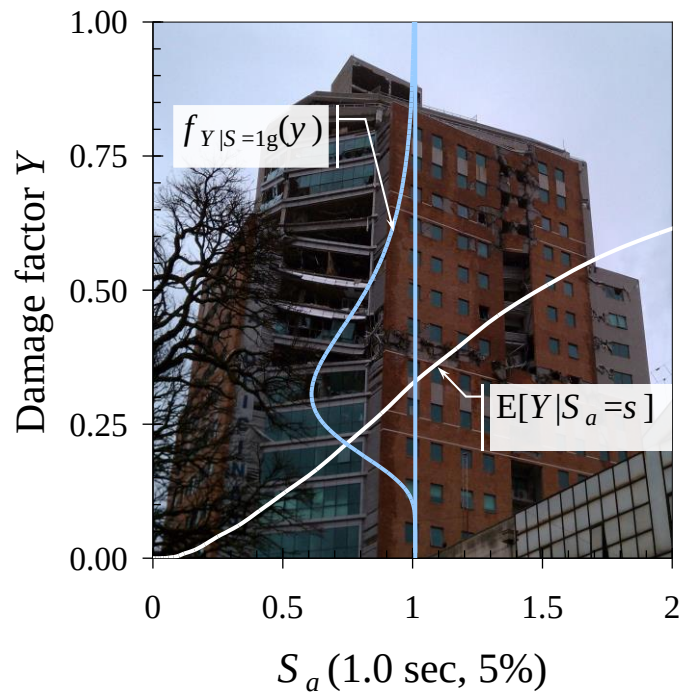

Keith Porter, PE PhD
University of Colorado Boulder and SPA Risk LLC, Denver CO USA
keith@cohen-porter.net

Revised 6 September 2017

(c) Keith Porter 2017. Permission is granted to duplicate or print this work for educational purposes. Any commercial use other than download requires written permission from the author, except as allowed by copyright law. The author reserves all other rights.

Suggested citation: Porter, K., 2017. *A Beginner's Guide to Fragility, Vulnerability, and Risk*. University of Colorado Boulder, 103 pp., <http://spot.colorado.edu/~porterka/Porter-beginners-guide.pdf>

Contents

1. Introduction.....	1
1.1 Objectives	1
1.2 An engineering approach to risk analysis	1
1.3 Organization of the guide.....	2
2. Fragility.....	2
2.1 Uncertain quantities	2
2.1.1 Brief introduction to probability distributions	2
2.1.2 Normal, lognormal, and uniform distributions	4
2.1.3 The clarity test.....	10
2.1.4 Aleatory and epistemic uncertainties	10
2.2 Meaning and form of a fragility function	14
2.2.1 What is a fragility function	14
2.2.2 Common form of a fragility function.....	14
2.2.3 A caution about ill-defined damage states	16
2.3 Multiple fragility functions	16
2.3.1 Sequential damage states	17
2.3.2 Simultaneous damage states	17
2.3.3 MECE damage states	18
2.4 Creating fragility functions	19
2.4.1 Three general classes of fragility functions	19
2.4.2 Data that cannot be used to derive fragility functions	19
2.4.3 What to know before trying to derive a fragility function	20
2.4.4 Actual failure excitation.....	20
2.4.5 Bounding-failure excitation	20
2.4.6 Other data conditions	21
2.4.7 Dealing with under-representative specimens	22
2.4.8 Dealing with fragility functions that cross.....	23
2.5 Some useful sources of component fragility functions.....	26
3. Vulnerability	27
3.1 Empirical vulnerability functions	27
3.2 Analytical vulnerability functions.....	29
3.3 Expert opinion vulnerability functions	31
3.4 How to express a vulnerability function	32

4. Hazard	34
4.1 Probabilistic seismic hazard analysis.....	34
4.2 Hazard rate versus probability	36
4.3 Measures of seismic excitation	37
4.3.1 Some commonly used measures of ground motion	37
4.3.2 Conversion between instrumental and macroseismic intensity	40
4.3.3 Some commonly used measures of component excitation	42
4.4 Hazard deaggregation	43
4.5 Convenient sources of hazard data	45
5. Risk for a single asset	46
5.1 Risk	46
5.2 Expected failure rate for a single asset	46
5.3 Probability of failure during a specified period of time.....	48
5.4 Expected annualized loss for a single asset	48
5.5 One measure of benefit: expected present value of reduced EAL.....	49
5.6 Risk curve for a single asset.....	50
5.6.1 Risk curve for a lognormally distributed loss measure.....	50
5.6.2 Risk curve for a binomially distributed loss measure.....	51
5.6.3 Risk curve for a binomially distributed loss measure with large N	53
5.7 Probable maximum loss for a single asset	53
5.8 Common single-site risk software	53
6. Portfolio risk analysis	54
6.1 Overview of a portfolio catastrophe risk model	54
6.2 Asset data and asset analysis.....	56
6.3 Portfolio hazard analysis.....	57
6.4 Portfolio loss analysis	57
6.5 Decision making	57
6.6 Common portfolio risk tools.....	58
7. Some mathematical tools	58
7.1 Monte Carlo simulation	58
7.2 Moment matching	58
8. Exercises	61
Exercise 1. Parts of a lognormal fragility function	61
Exercise 2. Basic elements of an earthquake rupture forecast.....	62

Exercise 3. Hazard curves.....	64
Exercise 4. The lognormal distribution.....	68
Exercise 5. Hazard deaggregation.....	68
Exercise 6. Estimate MMI from ground motion.....	69
Exercise 7. Write the equation for component failure rate	70
Exercise 8. Sequential damage states.....	71
Exercise 9. Simultaneous damage states.....	71
Exercise 10. MECE damage states	72
Exercise 11. Risk curve for number of injuries	73
9. References.....	77
Appendices.....	80
Appendix A: Tornado diagram for deterministic sensitivity	80
Introduction: which inputs matter most to an uncertain quantity?	80
Tornado-diagram procedure.....	82
Advantages and disadvantages	84
Example tornado diagram problem.....	84
Appendix B: Assigning a monetary value to statistical injuries	86
Appendix C: How to write and defend your thesis.....	87
C.1 Your thesis outline	87
C.2 Simplify as much as possible but no more	89
C.3 Style guide.....	90
C.4 Capitalization	92
C.5 Defending your thesis.....	97
Appendix D: How to write a research article.....	98
Appendix E: Revision history.....	101

Index of Figures

Figure 1. An engineering approach to risk analysis.....	2
Figure 2. Left: Gaussian probability density function. Right: Gaussian cumulative distribution function	5
Figure 3. Left: Lognormal probability density function. Right: Lognormal cumulative distribution function	7
Figure 4. Normal and lognormal distributions with the same mean and standard deviation.....	8
Figure 5. Left: Uniform probability density function. Right: Uniform cumulative distribution function	9
Figure 6. John Collier's 1891 Priestess of Delphi (a hypothetical clairvoyant).....	10
Figure 7. Derailed counterweight at 50 UN Plaza after the 1989 Loma Prieta earthquake (R Hamburger)	10
Figure 8. Left: a die (alea) literally symbolizes aleatory uncertainty. Right: Thomas Bayes, under whose eponymous viewpoint all undercertainty is epistemic (both images licensed for reuse) ..	11
Figure 9. Does a coin toss represent an irreducible uncertainty? (image credit: ICMA Photos, Attribution-ShareAlike 2.0 Generic license)	12
Figure 10. A. Keller's (1986) curves separating coin-toss solutions for heads and tails for a coin tossed from elevation 0 with initial upward velocity u and angular velocity ω . B. Diaconis et al.'s (2007) coin-tossing device	12
Figure 11. Suffolk Downs starting gate during a live horse race, from August 1, 2007. Can the probability mass function of its outcome be said to exist in nature? (Image credit: Anthony92931, Creative Commons Attribution-Share Alike 3.0 Unported license)	13
Figure 12. Increasing beta and adjusting theta to account for under-representative samples.....	23
Figure 13. Illustration of maximum likelihood estimation of lognormal fragility functions with type-B data and multiple sequential damage states, solution	26
Figure 15. Regression analysis of damage to woodframe buildings in the 1994 Northridge earthquake (Wesson et al. 2006).....	28
Figure 16. Analytical methods for estimating seismic vulnerability of a single asset (Porter 2003).	29
Figure 17. Accounting for variability in design within the asset class, one can extend PBEE to estimate seismic vulnerability of an asset class	30
Figure 18. Example analytical vulnerability function for highrise post-1980 reinforced concrete moment frame office building in the Western United States (Kazantzi et al. 2013)	30
Figure 19. USGS interactive hazard deaggregation website	44
Figure 20. Sample output of the USGS' interactive hazard deaggregation website.....	45
Figure 21. Calculating failure rate with hazard curve (left) and fragility function (right)	47
Figure 22. Two illustrative risk curves	50
Figure 23. Common elements of a catastrophe risk model.....	55
Figure 24. Monte Carlo simulation is very powerful and relatively simple, but can be computationally demanding and can converge slowly, meaning it can take a lot samples to get a reasonably accurate result. Moment matching offers a more efficient alternative. (Image by Ralf Roletschek, permission under CC BY-SA 3.0.)	59
Figure 25. 5-point moment matching for a lognormal probability distribution.....	60
Figure 26. Exercise 1 fragility function	62
Figure 27. 475-year (10%/50-year) $S_a(0.2 \text{ sec}, 5\%)$ hazard deaggregation at LA City Hall	69

Figure 28. Risk curve for exercise 11	76
Figure 29. A sample tornado diagram that depicts how the earthquake-induced repair cost for a particular building is affected by various model parameters (Porter et al. 2002).	82
Figure 30. Tornado diagram for professional society meal	85
Figure 31. Avoid streetlight-effect simplifications (Fisher 1942)	90
Figure 32. Avoid spherical-cow simplifications	90

Index of Tables

Table 1. Example maximum likelihood estimation of lognormal fragility functions with type-B data and multiple sequential damage states, initial guess	25
Table 2. Example maximum likelihood estimation of lognormal fragility functions with type-B data and multiple sequential damage states, solution	26
Table 3. MMI and EMS-98 macroseismic intensity scales (abridged).....	39
Table 4. Parameter values for Worden et al. (2012) GMICE for California	41
Table 5. Approximate relationship between PGA and MMI using Worden et al. (2012)	41
Table 6. Parameter values for Atkinson and Kaka (2007) GMICE for the United States.....	42
Table 7. Sample points (the sigma set) and weights for 5-point moment matching of a lognormal random variable	60
Table 8. Moment matching points for two uncorrelated lognormal random variables X and Y ..	61
Table 9. Exercise 2 quantities of $P[H \geq h \mid m, r, v, a]$	63
Table 10. Numerical solution to exercise 7	71
Table 11. Vulnerability and hazard functions for exercise 11	74
Table 12. $P[Y \geq y \mid S = s]$ for exercise 11	75
Table 13. Summands and sums for exercise 11	76
Table 14. Tabulating input values for a tornado diagram	82
Table 15. Tabulating output values for a tornado diagram	83
Table 16. Tornado diagram example problem	84
Table 17. Professional society meal cost tornado diagram quantities	85
Table 18. Federal values of statistical deaths and injuries avoided, in 1994 US\$.	87

1. Introduction

1.1 Objectives

This work provides a primer for earthquake-related fragility, vulnerability, and risk. It is written for new graduate students who are studying natural-hazard risk, but should also be useful for the newcomer to catastrophe risk modeling, such as users and consumers of catastrophe models by RMS, Applied Insurance Research, EQECAT, Global Earthquake Model, or the US Federal Emergency Management Agency (FEMA). Many of its concepts can be applied to other perils.

1.2 An engineering approach to risk analysis

This work is mostly about natural-hazard risk. There are several ways to quantify risk. I present an engineering approach, by which I mean essentially these steps, summarized in Figure 1.

1. **Exposure data.** Acquire available data about the assets exposed to loss. Often these data come in formats intended for uses other than those to which the analyst intends to put them.
2. **Asset analysis.** Interpret the exposure data to estimate the engineering attributes of the assets exposed to loss. These attributes (which I denote by A) may include quantity (e.g., square footage), value (e.g., replacement cost), and other engineering characteristics (e.g., model building type) exposed to loss in one or more small geographic areas. Occasionally assets are described probabilistically, e.g., the probability P that each asset has some set of attributes A , given the exposure data D , which I denote by $P[A|D]$. One combines the data D and the asset model $P[A|D]$ to estimate the probability that the assets actually have attributes A , which I denote by $P[A]$.
3. **Hazard analysis.** Select one or more measures of environmental excitation H to which the assets are assumed sensitive (e.g., peak ground acceleration), and estimate the relationship between the severity of those measures and the frequency (events per unit time) with which each of many levels of excitation is exceeded. I denote the relationship $P[H|A]$, i.e., the probability that the environmental excitation will take on value H , given attributes A . One combines $P[A]$ and $P[H|A]$ to estimate the probability of various levels of excitation, which we denote by $P[H]$.
4. **Loss analysis.** Select loss measures to quantify, for example, property repair costs, casualties, duration of loss of function, etc. For each taxonomic group in the asset analysis, estimate the relationship between the measure of environmental excitation H and each loss measure L . I call this relationship the vulnerability model, and denote it by $P[L|H]$. Loss measures are usually expressed at least in terms of expected value, and often in terms of the probability distribution of loss conditioned on (i.e., given a particular level of) environmental excitation. Use the theorem of total probability to estimate either the expected value of loss or the probability of exceeding one or more levels of loss, for each loss measure. Sometimes one estimates and separately reports various contributors to loss by asset class, by geographic area, by loss category, etc. One combines $P[H]$ and $P[L|H]$ to estimate the probability of various level of loss, which I denote by $P[L]$.

5. **Decision making.** The results of the loss analysis are almost always used to inform some risk-management decision. Such decisions always involve choosing between two or more alternative actions, and often require the analyst to repeat the analysis under the different conditions of each alternative, such as as-is and assuming some strengthening occurs.

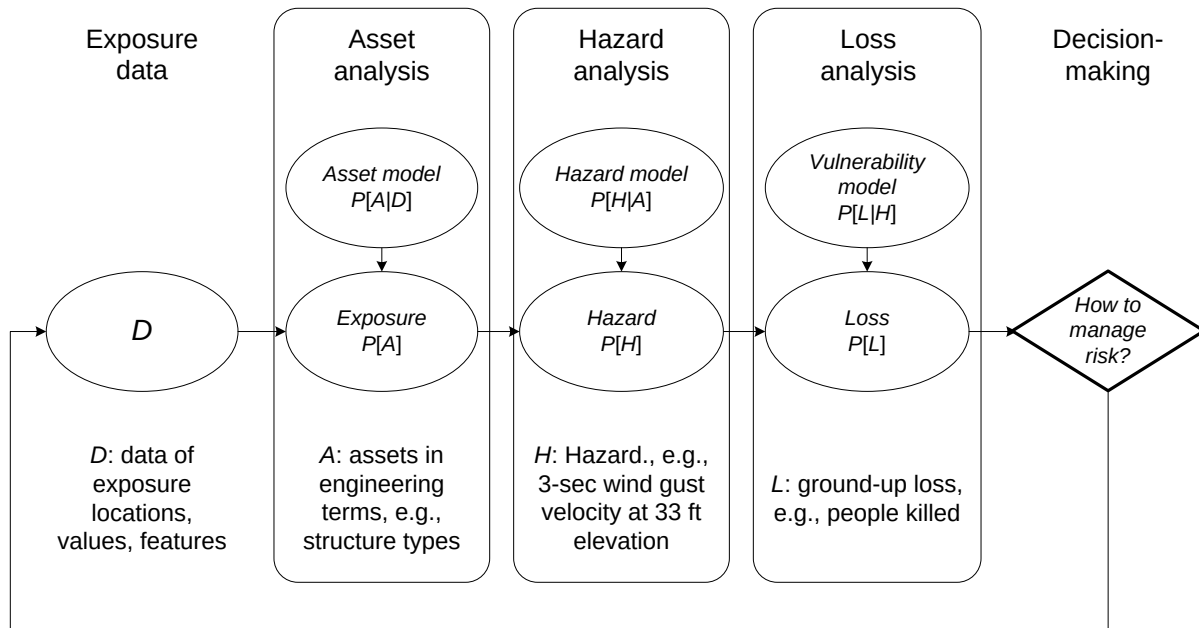


Figure 1. An engineering approach to risk analysis

1.3 Organization of the guide

Section 2 discusses fragility, by which I mean the probability of an undesirable outcome as a function of excitation. Section 3 discusses vulnerability, by which I mean the degree of loss as a function of excitation. Note the distinction: fragility is measured in terms of probability, vulnerability in terms of loss such as repair cost. Section 4 briefly discusses seismic hazard. See Section 5 for a brief discussion of risk to point assets. Section 6 is a work in progress, discussing risk to a portfolio of assets. Solved exercises are presented in Section 7. References are presented in Section 8. Several appendices provide guidance on miscellaneous subjects: (A) how to perform a deterministic sensitivity study called a tornado diagram analysis; (B) assigning monetary value to future statistical injuries to unknown persons; (C) how to write and defend a thesis, and (D) revision history.

2. Fragility

2.1 Uncertain quantities

2.1.1 Brief introduction to probability distributions

To understand fragility it is necessary first to understand probability and uncertain quantities. Since some undergraduate engineering programs do not cover these topics, let us discuss them briefly here before moving on to fragility.

Many of the terms used here involve uncertain quantities, often called random variables. This section is offered for the student who has not studied probability elsewhere. “Uncertain” is sometimes used here to mean something broader than “random” because “uncertain” applies both to quantities that change unpredictably (e.g., whether a tossed coin will land heads or tails side up on the next toss), and to quantities that do not vary but that are not known with certainty. For example, a particular building’s capacity to resist collapse in an earthquake may not vary much over time, but one does not know that capacity before the building collapses, so it is uncertain. In this work, uncertain variables are denoted by capital letters, e.g., D , particular values are denoted by lower case, e.g., d , probability is denoted by $P[]$, and conditional probability is denoted by $P[A|B]$, that is, probability that statement A is true given that statement B is true. In any case, more engineers use the expression “random variable” than use “uncertain quantity,” so I will tend to use the former. (Sidenote: many well-known quantities are not entirely certain, such as the speed of light in a vacuum, but the uncertainty is so small that it is usually practical to ignore it and to treat the quantity as certain.)

Random variables are quantified using probability distributions. Three kinds of probability distributions are discussed here: probability density functions, probability mass functions, and cumulative distribution functions. Only scalar random variables are discussed here. For the present discussion, let us denote the random variable by a capital letter X , and any particular value that it might take on with a lower-case x .

Probability density functions apply to quantities can take on a continuous range of values, such as the peak transient drift ratio that a particular story in a particular building experiences in a particular earthquake. The probability density function for a continuous scalar random variable can be plotted on an x-y chart, where the x-axis measures possible value the variable can take on and the y-axis measures the probability per unit of x that the variable takes on that particular x value. Let us denote a probability density function of x with by $f_x(x)$. The lower-case f indicates a probability density function, the subscript x denotes that it is a probability density function of the random variable X , and the argument (x) indicates that the function is being evaluated at the particular value x . The area under the probability density function between any two values a and b gives the probability that X will take on a value between those two bounds. We here use the convention that the upper bound is included and the lower bound is not.

$$P[a < X \leq b] = \int_a^b f_x(x) dx \quad (1)$$

If one had a probability density function for the example of peak transient drift ratio just mentioned, we could evaluate the probability that the story would experience drift between $a = 0.5\%$ and $b = 1.0\%$ by integrating between those bounds. Note again that the units of $f_x(x)$ are inverse units of x , hence the word “density” in the name of the function. $P[a < X \leq b]$ is unitless. One can think of $f_x(x)$ it as having units as probability density and $P[a < X \leq b]$ as having units of probability, bearing in mind that probability is unitless.

If one integrates the probability density function of X from $-\infty$ to x , the value of the integral is the probability that the random variable will take on a value less than or equal to x . We refer to the value of that integral as a function of x as the cumulative distribution function of X . It is denoted here by $F_X(x)$:

$$P[X \leq x] = \int_{z=-\infty}^x f_X(z) dz \quad (2)$$

Equation (2) uses the dummy variable z because the upper bound x here is a fixed, particular value, the value at which we are evaluating the cumulative distribution function.

Some variables can only take on discrete values, such as whether a particular window in a particular building in a particular earthquake survives undamaged, or it cracks without any glass falling out, or cracks and has glass fall out. Let X now denote such a discrete random variable. We use a probability mass function to express the probability that X takes on any given value x . In the case of the broken window, one might express X as an index to the uncertain damage state, which can take on values $x = 0$ (undamaged), $x = 1$ (cracked, not fallen), or $x = 2$ (cracked and fallen out). Let us denote by $p_X(x)$ the probability mass function. The lower-case p indicates a probability mass function, the subscript X denotes that it is a probability mass function of the random variable X , and the argument (x) indicates that the function is being evaluated at the particular value x . Just to be clear about notation:

$$P[X = x] = p_X(x) \quad (3)$$

One can express the cumulative distribution function of a discrete random variable the same as a continuous one:

$$\begin{aligned} P[X \leq x] &= \int_{z=-\infty}^x p_X(z) dz \\ &= \sum_{z=-\infty}^x p_X(z) \end{aligned} \quad (4)$$

2.1.2 Normal, lognormal, and uniform distributions

Aside from the foregoing definitions, $f_X(x)$, $p_X(x)$, and $F_X(x)$ do not have to take on a parametric form, i.e., they are not all necessarily described with an equation that has parameters, coefficients, and so on. But it is often convenient to approximate them with parametric distributions. There are many such distributions; only three or so will be used in the present document, because they are used so frequently in applications of fragility, vulnerability and risk, and are used later in this document. They are the normal (also called Gaussian), lognormal (sometime spelled with a hyphen between “log” and “normal”), and uniform distributions. Anyone who deals with engineering risk should understand and use these three distributions, at least to the extent discussed here. Only the most relevant aspects of the distributions are described here; for more detail see for example the Wikipedia articles.

If a quantity X is normally distributed with mean (expected, average) value μ and standard deviation σ , it can take on any scalar value in $-\infty < X < \infty$. Note that the larger σ , the more uncertain is X . The Gaussian probability density function is expressed as in Equation (5), and as shown there is sometimes expressed in the normalized form shown in the second line of the equation with the lower-case Greek letter ϕ .

$$f_x(x) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{(x-\mu)^2}{2\sigma^2}} = \varphi\left(\frac{x-\mu}{\sigma}\right) \quad (5)$$

Virtually all mathematical software provide a built-in function for the Gaussian probability density function, e.g., in Microsoft Excel, $\varphi(z)$ is evaluated using the function `normdist(z)`. The cumulative distribution function (CDF) can be expressed as follows:

$$\begin{aligned} P[X \leq x] &= F_x(x) \\ &= \int_{-\infty}^x \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{(z-\mu)^2}{2\sigma^2}} dz \\ &= \Phi\left(\frac{x-\mu}{\sigma}\right) \end{aligned} \quad (6)$$

where Φ commonly denotes the standard normal cumulative distribution function. It too is available in all mathematical software, e.g., `normsdist()` in Microsoft Excel. Equations (5) and (6) are illustrated in Figure 2. Note that

$\mu \in \{ \mathcal{R} \}$, meaning that μ is any real scalar value
 $\sigma \in \{ \mathcal{R} > 0 \}$, meaning that σ is any positive scalar value

Inverting the normal cumulative distribution function. One can find the value x associated with a specified nonexceedance probability, p by inverting the cumulative distribution function at p :

$$\begin{aligned} x_p &= x : P[X \leq x_p] = p \\ x_p &= F_x^{-1}(p) \\ &= \mu + \sigma \cdot \Phi^{-1}(p) \end{aligned} \quad (7)$$

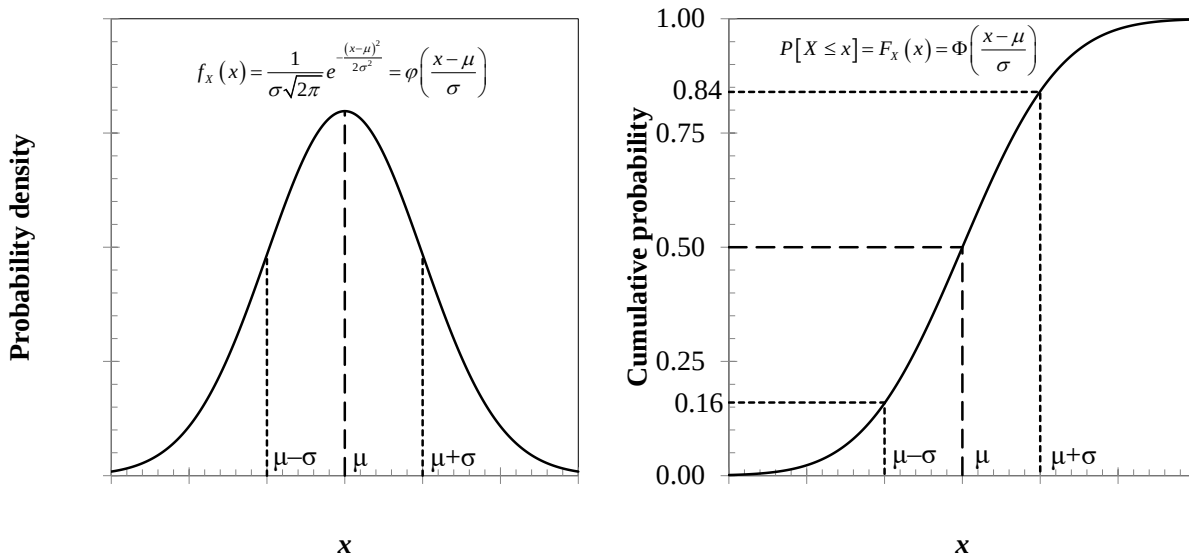


Figure 2. Left: Gaussian probability density function. Right: Gaussian cumulative distribution function

Let us turn now to the lognormal distribution. The earthquake engineer should be intimately familiar with the shape of the probability density function and the cumulative distribution function, and familiar with the meaning and use of each of its parameters. The engineer who deals with earthquake risk should understand this distribution and its parameters very well because the lognormal distribution is ubiquitous in probabilistic seismic hazard analysis (PSHA) and probabilistic seismic risk analysis (PSRA).

Why the lognormal cumulative distribution function is widely used for fragility

There is nothing fundamental about the lognormal distribution that makes it ideal or exact or universal for the applications described here. At least four reasons justify its use:

1. Simplicity. It has a simple, parametric form for approximating an uncertainty quantity that must take on a positive value, using only an estimate of central value and uncertainty;
2. Precedent. It has been widely used for several decades in earthquake engineering.
3. Information-theory reasons. It is the distribution that assumes the least knowledge (more precisely, the maximum entropy—a term of art from information theory that will not be explained here) if one only knows that the variable is positively valued with specified median and logarithmic standard deviation.
4. Often fits data. It often reasonably fits observed distributions of quantities of interest here, such as ground motion conditioned on magnitude and distance, the collapse capacity of structures, and the marginal distribution of loss conditioned on shaking.

But the lognormal may fit capacity data badly, sometimes worse than other competing parametric and nonparametric forms. Beware oversimplification, and never confuse a mathematical simplification or model with reality. Ideally one's model approximates reality, but the model is not the thing itself.

If a variable is lognormally distributed, that means its natural logarithm is normally distributed. Which means it must take on a positive real value, and the probability of it being zero or negative is zero. Its probability density function is given by Equation (8). One can write the CDF several different and equivalent ways, as shown in Equation (9).

$$\begin{aligned} f_x(x) &= \frac{1}{x\beta\sqrt{2\pi}} \cdot e^{-\frac{(\ln(x/\theta))^2}{2\beta^2}} \\ &= \varphi\left(\frac{\ln(x/\theta)}{\beta}\right) \end{aligned} \tag{8}$$

$$\begin{aligned}
 P[X \leq x] &= F_X(x) \\
 &= \Phi\left(\frac{\ln x - \ln \theta}{\beta}\right) \\
 &= \Phi\left(\frac{\ln(x/\theta)}{\beta}\right) \\
 &= \Phi\left(\frac{\ln x - \mu_{\ln X}}{\sigma_{\ln X}}\right)
 \end{aligned} \tag{9}$$

Equations (8) and (9) are illustrated in Figure 3. The parameters θ and β are referred to here as the median and logarithmic standard deviation, respectively. The median θ is the quantity that has 50% probability of not being exceeded. The median is always larger than the most likely value of the uncertainty quantity, its mode, as shown in Figure 3. The natural logarithm of the median is the mean of the natural logarithm of the variable, or stated another way, Equation (10), in which μ denotes the expected value and $\mu_{\ln X}$ indicates that the mean of the natural logarithm of the uncertain variable X . The logarithmic standard deviation is the standard deviation of the natural logarithm of the variable, as indicated by Equation (11), in which σ denotes standard deviation and $\sigma_{\ln X}$ denotes the standard deviation of the natural logarithm of X .

$$\theta = \exp(\mu_{\ln X}) \tag{10}$$

$$\beta = \sigma_{\ln X} \tag{11}$$

The cumulative distribution function of X , when evaluated at θ , is 0.5 by the definition of θ . The median has the same units as X . The natural logarithm of θ is the mean (average, expected) value of $\ln X$, hence the alternative notation $\mu_{\ln X}$, because the Greek letter μ is often used to denote the mean value of an uncertainty quantity. The logarithmic standard deviation β is the standard deviation of the natural logarithm of X , hence the alternative notation $\sigma_{\ln X}$ because the Greek letter σ is often used to denote the standard deviation of an uncertainty quantity. It has the same units as $\ln X$. The more uncertain a quantity, the greater β .

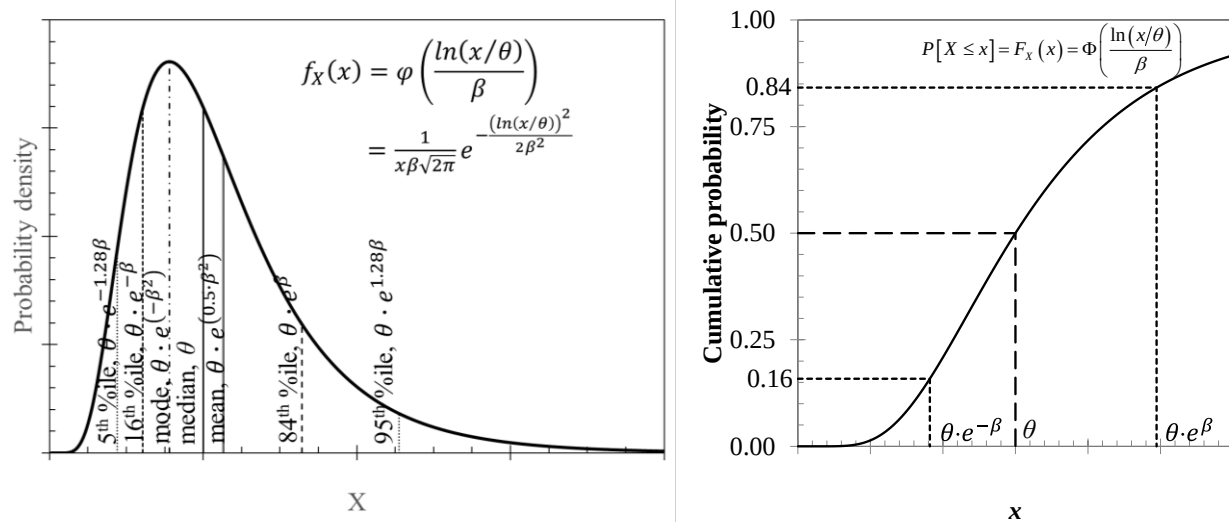


Figure 3. Left: Lognormal probability density function. Right: Lognormal cumulative distribution function

Inverting the lognormal cumulative distribution function. The value x associated with a specified nonexceedance probability, p is given by inverting Equation (9) at p :

$$\begin{aligned} x_p &= F_X^{-1}(p) \\ &= \theta \cdot \exp(\beta \cdot \Phi^{-1}(p)) \end{aligned} \quad (12)$$

It is sometimes desirable to calculate θ and β in terms of μ and σ . Here are the conversion equations. Let v denote the coefficient of variation of X . It expresses uncertainty in X relative to mean value. Then

$$v = \frac{\sigma}{\mu} \quad (13)$$

$$\beta = \sqrt{\ln(1+v^2)} \quad (14)$$

$$\theta = \frac{\mu}{\sqrt{1+v^2}} \quad (15)$$

Using Equations (14) and (15), let us compare a normal distributed variable X_1 and a lognormally distributed variable X_2 with the same mean value $\mu_{X1} = \mu_{X2} = 0.6$ and same standard deviation $\sigma_{X1} = \sigma_{X2} = 0.4$. Applying Equations (13), (14), and (15) yields a coefficient of variation $v_{X1} = v_{X2} = 0.67$, logarithmic standard deviation of X_2 (the standard deviation of the natural logarithm) $\sigma_{\ln X2} = \beta = 0.61$, and median of X_2 (but *not* of X_1) $\theta_{X2} = \exp(\mu_{\ln X2}) = 0.5$. Figure 4 shows the two distributions together. The probability density function of the normal has a higher peak, which is at its mean value, its median, and its mode. The median value of the lognormal distribution is always less than the mean; see Equation (15) for the reason. The median and the mode (the most likely value) of the normal are the same. The mode, median, and mean of the lognormal are different values. The 16th and 84th percentile values of the two distributions also differ, but note how the 16th percentile of the lognormal is higher than that of the normal, but the median and 84th are lower.

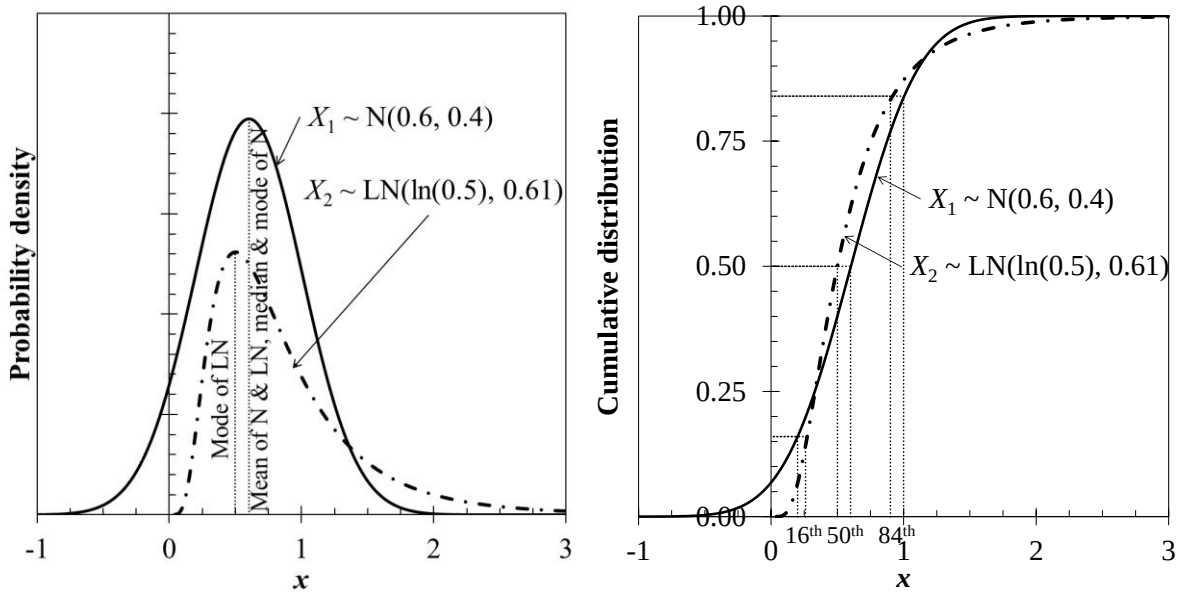


Figure 4. Normal and lognormal distributions with the same mean and standard deviation

Finally, let us briefly review the uniform distribution. A quantity that is uniformly distributed between bounds a and b can take on any value between those bounds with equal probability. Its probability density function and cumulative distribution functions are expressed as shown in Equations (16) and (17), which are illustrated in Figure 5.

$$\begin{aligned} f_x(x) &= 0 & x < a \\ &= \frac{1}{b-a} & a \leq x \leq b \\ &= 0 & x > b \end{aligned} \quad (16)$$

$$\begin{aligned} F_x(x) &= 0 & x < a \\ &= \frac{x-a}{b-a} & a \leq x \leq b \\ &= 1 & x > b \end{aligned} \quad (17)$$

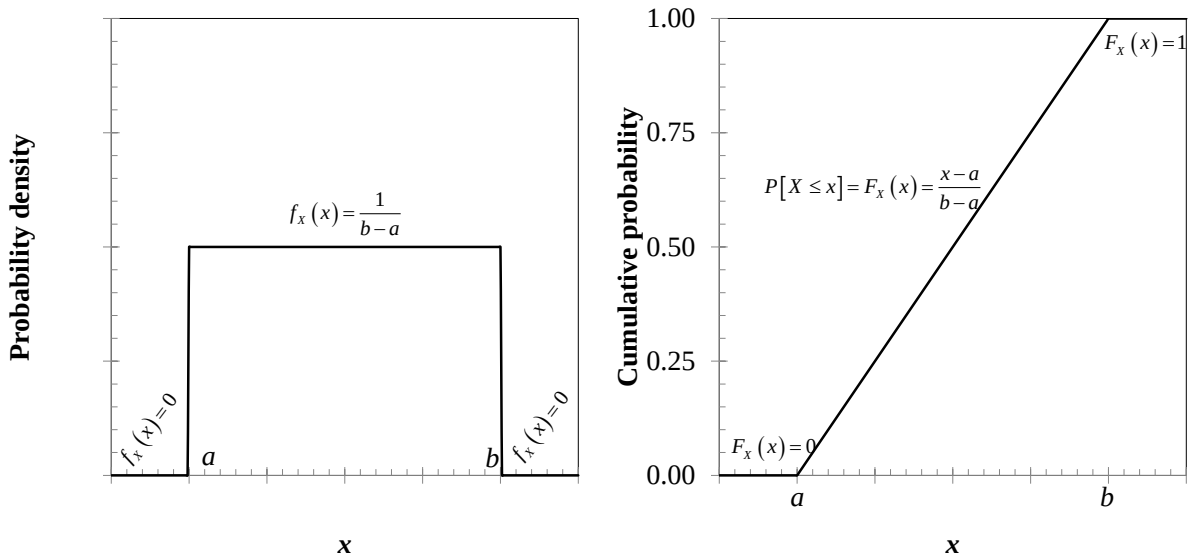


Figure 5. Left: Uniform probability density function. Right: Uniform cumulative distribution function

2.1.3 The clarity test

It is a common pitfall in loss estimation to define quantities vaguely, relying on ambiguous descriptions of damage or loss such as “some cracks” or “extensive spalling,” that are neither the products of a quantitative model nor capable of being determined consistently by different observers. When such terms cannot be avoided, fuzzy math can be used to interpret them mathematically but at the cost of readership and users who do not know fuzzy math. Often however vague terms can be avoided by ensuring that all model quantities pass the so-called clarity test, apparently developed by Howard (1988). It works as follows.

Imagine a hypothetical person called a clairvoyant who knows the past, present, and future, every event and physical quantity, but having no judgment. An event or quantity passes the clarity test if the clairvoyant would be able to say whether the event in question occurs or, in the case of quantity, its value, without the exercise of judgment, e.g., without asking what is meant by “some cracks” or what constitutes “significant deformation.”

For example, imagine damage occurs to a traction elevator in an earthquake as illustrated in Figure 7. A binary variable of the damage state “counterweights derailed,” passes the clarity test: two people looking at Figure 7 will reach same evaluation of the damage state. A binary variable of the damage state “moderate elevator damage” probably would not pass the clarity test without additional information. The reader is urged to ensure that his or her quantities and events are defined to pass the clarity test.



Figure 7. Derailed counterweight at 50 UN Plaza after the 1989 Loma Prieta earthquake (R Hamburger)



Figure 6. John Collier's 1891 Priestess of Delphi (a hypothetical clairvoyant).

2.1.4 Aleatory and epistemic uncertainties

It is common in earthquake engineering to try to distinguish between two categories of uncertainty: aleatory (having to do with inherent randomness) and epistemic (having to do with one's model of nature).

Aleatory uncertainties are supposedly irreducible, existing in nature because they are inherent—natural—to the process involved. The roll of dice (alea is a single die in Latin) or the toss of a coin are cited as examples of irreducible, inherent randomness. Their outcome probabilities are conceived as existing in nature, inherent in the process in question, and with infinite repeated trials the probabilities can be determined with certainty but not changed. An example of a possibly aleatory uncertainty from earthquake engineering is the uncertainty in structural response resulting from randomness in the ground motion, sometimes called the record-to-record variability.



Figure 8. Left: a die (alea) literally symbolizes aleatory uncertainty. Right: Thomas Bayes, under whose eponymous viewpoint all undercertainty is epistemic (both images licensed for reuse)

Epistemic uncertainties are supposedly reducible with better knowledge, such as with a better structural model or after more experimental testing of a component. They exist as attributes of the mathematical model, that is, because of the knowledge state of the modeler. They do not exist in nature. They are not inherent in the real-world process under consideration.

Most US earthquake engineers and seismologists at the time of this writing seem to hold this view of probability—that uncertainties can be classified as aleatory or epistemic—a view that one can call the frequentist or classical view.

The frequentist viewpoint is not unchallenged, the alternative being so-called Bayesian probability. Beck (2009) advances the Bayesian viewpoint, arguing first that aleatory uncertainty is vaguely defined. More importantly, he points out that one cannot scientifically prove that any quantity is inherently uncertain, that better knowledge of its value cannot be acquired. Under this viewpoint, all uncertainty springs from imperfections in our model of the universe—all uncertainty is epistemic.

Der Kiureghian and Ditlevsen (2009), who seem to be trying to square the circle and reconcile the frequentist and Bayesian viewpoints (note the title of their work: “Aleatory or epistemic? Does it matter?”), offer this definition: “Uncertainties are characterized as epistemic if the modeler sees a possibility to reduce them by gathering more data or by refining models. Uncertainties are categorized as aleatory if the modeler does not foresee the possibility of reducing them.” Under these pragmatic definitions, aleatory or epistemic depends on the knowledge state or belief of the modeler: an uncertainty is aleatory if the modeler thinks it cannot be practically reduced in the near term without great scientific advances and epistemic otherwise. Under this definition an uncertainty can be aleatory to one modeler and epistemic to another. The authors suggest that “these concepts only make unambiguous sense if they are defined within the confines of a model of analysis.” Which seems to mean that although these authors use the word aleatory, they mean something different than inherent randomness.

Let us test the distinction by looking more closely at a favorite frequentist example: the coin toss. Suppose one tossed the coin over sand or mud, a surface from which the coin will not bounce, with initial elevation above the surface $y = 0$, initial upward velocity u and initial angular velocity ω , and initially heads up. The calculation of the coin-toss outcome becomes a problem of Newtonian mechanics, which does not acknowledge uncertainty. Keller (1986) offers the solution shown in Figure 10A. Diaconis et al. (2007) demonstrated deterministic coin-tossing with a laboratory experiment (see Figure 10B for their device), concluding that “coin-tossing is physics, not random.” Without the initial information, the process appears random (what subsequent authors called coarse-grained random); with the initial information it becomes fine-grained deterministic. The additional information eliminates the supposedly irreducible aleatory uncertainty.



Figure 9. Does a coin toss represent an irreducible uncertainty? (image credit: ICMA Photos, Attribution-ShareAlike 2.0 Generic license)

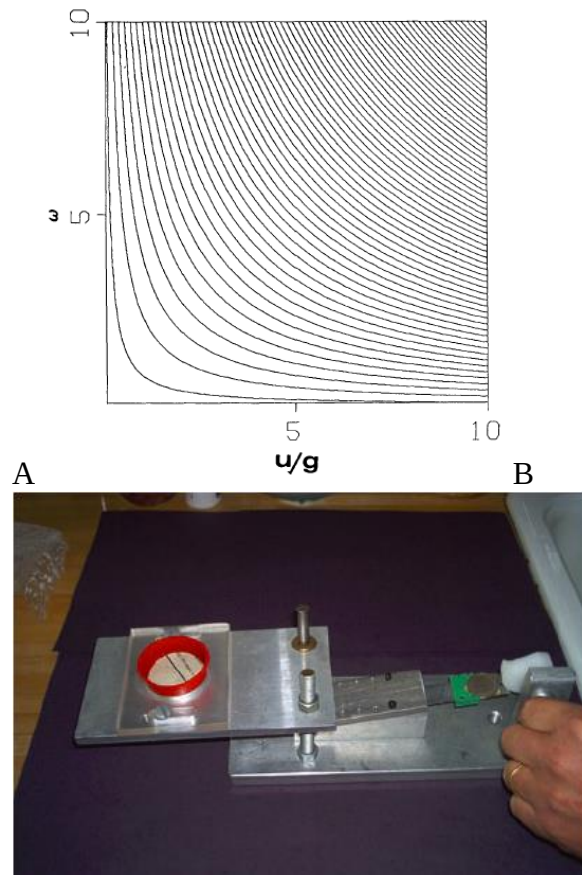


Figure 10. A. Keller's (1986) curves separating coin-toss solutions for heads and tails for a coin tossed from elevation 0 with initial upward velocity u and angular velocity ω . B. Diaconis et al.'s (2007) coin-tossing device

Let us consider another example from seismology: record-to-record uncertainty. Seismologists have created computational models of faults and the mechanical properties of the lithosphere and surficial geology, producing modeled ground motions for specified fault ruptures. See for example

Graves and Somerville (2006) or Aagaard et al. (2010a, b). These seem likely to be more realistic than those drawn from a database of ground motions recorded from other sites with a variety of site conditions and seismic environments dissimilar from the sites of interest, again reducing the supposedly inherently and irreducibly random.

Let us next consider the notion that epistemic uncertainties can be reduced with more knowledge. In fact, often new knowledge increases uncertainty rather than decreasing it. Our initial models may be drawn from too little data or data that do not reflect some of the possible states of nature. Or they may be based on overly confident expert judgment. For example, until about 2000, seismologists believed that a fault rupture could not jump from one fault to another. They have since observed such fault-to-fault ruptures, e.g., in the 2002 Denali Alaska Earthquake. The new knowledge led the seismologists to abandon the notion that the maximum magnitude of an earthquake was necessarily limited by the length of the largest fault segment. Their uncertainty as to the maximum magnitude of earthquakes elsewhere increased as a result, e.g., between the 2nd and 3rd versions of the Uniform California Earthquake Rupture Forecasts (Field et al. 2007, 2013).

The viewpoints discussed here are held on the one hand by so-called frequentists (who assert that probability exists in nature), Bayesians (who hold that all uncertainty reflects imperfect knowledge or a simplified model of the universe), with a middle ground of some sort represented by Der Kiureghian and Ditlevsen.

As a test of the three viewpoints, consider a horse race. It takes place on a particular day and time, with particular weather and track conditions and with horses and jockeys in an unrepeatable mental and physical state. Is the outcome of the race aleatory or epistemic? I assert that, unbeknownst to all, one horse and jockey are the fastest pair under these conditions, and *will* win. But the experiment will only be held once, never repeated. Does the probability distribution of the winning horse exist in nature (frequentist), does uncertainty about the outcome solely reflect one's knowledge state and model of the universe (Bayesian), or does it depend on whether the person making the bet is in a position to gather knowledge from the feed room (Der Kiureghian and Ditlevsen)? If the quantity of interest can only be observed once, with no possible repetition to estimate the frequency with which each horse will win, does its probability distribution exist in nature, or is it reducible with better knowledge? Both definitions employed by frequentists seem to break down in this example, the Bayesian viewpoint holds up, and Der Kiureghian and Ditlevsen's definition cannot be applied without more knowledge about who the bettor is.



Figure 11. Suffolk Downs starting gate during a live horse race, from August 1, 2007. Can the probability mass function of its outcome be said to exist in nature? (Image credit: Anthony92931, Creative Commons Attribution-Share Alike 3.0 Unported license)

What is the value in calling an uncertainty “aleatory” if aleatory does not mean what it is supposed to mean, if it does not mean irreducible, if one cannot be sure the uncertainty exists in nature? Words are only useful in technical writing if they mean what we want them to mean. I suggest that

writers who do not believe that aleatory means what they want it to mean should not use the word, regardless of what other people think.

With this basic introduction to probability and uncertain quantities, we can now finally take up the subject of a fragility function.

2.2 Meaning and form of a fragility function

2.2.1 What is a fragility function

A common nontechnical definition of fragility is “the quality of being easily broken or damaged.” The concept of a fragility function in earthquake engineering dates at least to Kennedy et al. (1980), who define a fragility function as a probabilistic relationship between frequency of failure of a component of a nuclear power plant and peak ground acceleration in an earthquake. More broadly, one can define a fragility function as a mathematical function that expresses the probability that some undesirable event occurs (typically that an asset—a facility or a component—reaches or exceeds some clearly defined limit state) as a function of some measure of environmental excitation (typically a measure of acceleration, deformation, or force in an earthquake, hurricane, or other extreme loading condition).

There is an alternative and equivalent way to conceive of a fragility function. Anyone who works with fragility functions should know this second definition as well: a fragility function represents the cumulative distribution function of the capacity of an asset to resist an undesirable limit state. Capacity is measured in terms of the degree of environment excitation at which the asset exceeds the undesirable limit state. For example, a fragility function could express the uncertain level of shaking that a building can tolerate before it collapses. The chance that it collapses at a given level of shaking is the same as the probability that its strength is less than that required to resist that level of shaking.

Here, “cumulative distribution function” means the probability that an uncertain quantity will be less than or equal to a given value, as a function of that value. The researcher who works with fragility functions should know both definitions and be able to distinguish between them.

Some people use the term fragility curve to mean the same thing as fragility function. Some use fragility and vulnerability interchangeably. This work will not do so, and will not use the expression “fragility curve” or “vulnerability curve” at all. A function allows for a relationship between loss and two or more inputs, which a curve does not, so “function” is the broader, more general term.

2.2.2 Common form of a fragility function

The most common form of a seismic fragility function (but not universal, best, always proper, etc.) is the lognormal cumulative distribution function (CDF). It is of the form

$$F_d(x) = P[D \geq d | X = x] \quad d \in \{1, 2, \dots, N_D\}$$

$$= \Phi\left(\frac{\ln(x/\theta_d)}{\beta_d}\right) \quad (18)$$

where

$P[A|B]$ = probability that A is true given that B is true

D = uncertain damage state of a particular component. It can take on a value in $\{0, 1, \dots, n_D\}$, where

$D = 0$ denotes the undamaged state, $D = 1$ denotes the 1st damage state, etc.

d = a particular value of D , i.e., with no uncertainty

n_D = number of possible damage states, $n_D \in \{1, 2, \dots\}$

X = uncertain excitation, e.g., peak zero-period acceleration at the base of the asset in question.

Here excitation is called demand parameter (DP), using the terminology of FEMA P-58 (Applied Technology Council 2012). FEMA P-58 builds upon work coordinated by the Pacific Earthquake Engineering Research (PEER) Center and others. PEER researchers use the term engineering demand parameter (EDP) to mean the same thing. Usually $X \in \{\Re \geq 0\}$ but it doesn't have to be. Note that $X \in \{\Re \geq 0\}$ means that X is a real, nonnegative number.

x = a particular value of X , i.e., with no uncertainty

$F_d(x)$ = a fragility function for damage state d evaluated at x .

$\Phi(s)$ = standard normal cumulative distribution function (often called the Gaussian) evaluated at s , e.g., `normsdist(s)` in Excel.

$\ln(s)$ = natural logarithm of s

θ_d = median capacity of the asset to resist damage state d measured in the same units as X . Usually $\theta_d \in \{\Re > 0\}$ but it could have a vector value. The subscript d appears because a component can sometimes have $n_D > 1$.

β_d = the standard deviation of the natural logarithm of the capacity of the asset to resist damage state d . Since “the standard deviation of the natural logarithm” is a mouthful to say, a shorthand form that you can use, as long as you define it early in your thesis and defense, is logarithmic standard deviation.

For example, see the PACT fragility database at https://www.atcouncil.org/files/FEMAP-58-3_2_ProvidedFragilityData.zip (Applied Technology Council 2012). See the tab PERFORMANCE DATA, the line marked C3011.002c. It employs the lognormal form to propose two fragility functions for Wall Partition, Type: Gypsum + Ceramic Tile, Full Height, Fixed Below, Slip Track Above w/ returns (friction connection). The demand parameter is “Story Drift Ratio,” meaning the time-maximum absolute value of the peak transient drift ratio for the story at which partition occurs. For that component, $n_D = 2$, which occur sequentially, meaning that a component must enter damage state 1 before it can enter damage state 2. Damage state 1 is defined as “Minor cracked joints and tile.” Damage state 2 is defined as “Cracked joints and tile.” $\theta_1 = 0.0020$, $\beta_1 = 0.70$, $\theta_2 = 0.0050$, and $\beta_2 = 0.40$. The repair for $D = 1$ is described as “Carefully remove cracked tile and grout at cracked joints, install new ceramic tile and re-grout joints for 10% of full 100 foot length of wall. Existing wall board will remain in place.” Repair for $D = 2$ is “Install ceramic tile and grout all joints for full 100 foot length of wall. Note: gypsum wall board

will also be removed and replaced which means the removal of ceramic tile will be part of the gypsum wall board removal.”

2.2.3 A caution about ill-defined damage states

Some authors try to characterize sequential damage states of whole buildings or aggregate parts of buildings with labels such as slight, moderate, extensive, and complete, as in the case of Hazus-MH, and then describe each damage state in terms of the damage to groups of components in the building. Here for example are the Hazus-MH descriptions of the moderate nonstructural damage state for two different components: “Suspended ceilings: Falling of tiles is more extensive; in addition the ceiling support framing (T-bars) has disconnected and/or buckled at few locations; lenses have fallen off of some light fixtures and a few fixtures have fallen; localized repairs are necessary.... Electrical-mechanical equipment, piping, and ducts: Movements are larger and damage is more extensive; piping leaks at few locations; elevator machinery and rails may require realignment.”

The problem here is twofold: first, no objective, measurable and testable quantities are invoked. One cannot test whether the number of fallen tiles one observes in a laboratory test qualify as “extensive,” or whether the observed quantity of piping leaks constitute “a few locations.” One could probably address these problems of qualitative definition using fuzzy math, where one assigns a particular number of disconnected T-bars or piping leaks with a degree of membership to the descriptor “more extensive” or “a few.” A more serious problem is that a particular building with suspended ceilings and piping might have no T-bar connection failures but many piping leaks. The damage-state definitions embed the false assumption that there is an objectively observable, rankable quantity called nonstructural damage. Nonstructural damage in most buildings have multiple, potentially independent measures that cannot be ranked with a single value.

The point of this section is not to discredit Hazus-MH. The fault this author finds in the Hazus developers’ definitions of sequential aggregate damage states is a minor imperfection. Most, maybe all, engineering works have these. The Hazus developers had a bigger objective than describing the damage to nonstructural components in a building, and that bigger objective is admirably achieved. Hazus-MH is a monumental accomplishment. Rather, the point of this section is to caution the reader against trying to develop or use a fragility function that assigns a single damage-state descriptor to a complex group of multiple, potentially independent measures that fundamentally cannot be ranked with a single value.

2.3 Multiple fragility functions

Consider situations where a component, asset, or person can experience multiple possible damage states. This work considers only discrete damage states, meaning that one can number the damage states $D = 1, 2$, etc., but not 1.5. If a component is damaged, one can number damage states in at least one of three ways. First, let $D = 0$ denote the undamaged state. If the component or asset is damaged, let the damage state be denoted by $D \in \{1, 2, \dots, n_D\}$. The three kinds of fragility functions dealt with here are:

1. Sequential damage states. A component must enter damage state 1 before it can enter damage state 2, and it must enter 2 before 3, and so on.

2. Simultaneous damage states. A damaged component can be in more than one damage state at the same time. Order does not matter.
3. Mutually exclusive and collectively exhaustive (MECE) damage states. A damaged component can be in one and only one damage state. Order does not matter.

There are other ways to express fragility, such as with a vector that combines numbers of various types. For example, one might want to talk about a scalar quantity Q of a component that is in a particular sequential damage state D , such as the fraction of a reinforced concrete shearwall that has cracks of at least 3/8-inch width, which would be indicative of the quantity of steel that has to be replaced. But the present discussion is limited to the three kinds noted above.

2.3.1 Sequential damage states

In sequential damage states, the damage states are ordered (D is therefore an ordinal number, subject to certain mathematical rules of ordinal numbers), so one can talk about lower damage states and higher ones. The probability of reaching or exceeding a lower damage state is (generally) greater than the probability of reaching or exceeding a higher damage state.

$$\begin{aligned}
 P[D = d | X = x] &= 1 - P[D \geq 1 | X = x] & d = 0 \\
 &= P[D \geq d | X = x] - P[D \geq d + 1 | X = x] & 1 \leq d < n_D \\
 &= P[D \geq d | X = x] & d = n_D
 \end{aligned} \tag{19}$$

The first line is the probability that the component is undamaged. The next is the probability that the component is damaged, but not in damage state n_D , called the maximum damage state. The last line is the probability that the component is damaged in the maximum damage state.

2.3.2 Simultaneous damage states

With simultaneous damage states, one can evaluate the probability that a component is in each damage state independently of the others. Because order does not matter, damage states D are nominal numbers, like the numbers on football jerseys without any order, although $D = 0$ is reserved for the undamaged state.

$$\begin{aligned}
 P[D = d | X = x] &= 1 - P[D \geq 1 | X = x] & d = 0 \\
 &= P[D \geq 1 | X = x] \cdot P[D = d | D \geq 1] & 1 \leq d \leq n_D
 \end{aligned} \tag{20}$$

where

$P[D \geq 1 | X = x]$ = probability that the component is damaged in some way, which can be quantified just like any fragility function, such as with a lognormal CDF:

$$P[D \geq 1 | X = x] = \Phi\left(\frac{\ln(x/\theta)}{\beta}\right) \tag{21}$$

where there is only one value of θ and only one value of β —no subscripts as in Equation (18)—that is, a single median and logarithmic standard deviation of capacity. Note that the fragility function does not have to be a lognormal CDF, but that is common.

$P[D = d | D \geq 1] =$ probability that, if damaged, it is in damage state d . It can be in others as well.

Since under simultaneous damage states a component can be in more than one damage state,

$$\left(\sum_{d=1}^{N_D} P[D = d | D \geq 1] \right) > 1 \quad (22)$$

How can one estimate the probability that a component is in one and only one damage state? Let d_i denote one particular value of D and d_j another particular value of D , but $d_i \neq d_j$, $d_i \neq 0$, and $d_j \neq 0$. Let $P[D = d_i \& D \neq d_j | X = x]$ denote the probability that the component is in damage state d_i and it is not in any other damage state d_j given that $X = x$. It is given by

$$\begin{aligned} P[D = d_i \& D \neq d_j | X = x] &= P[D \geq 1, D = d_i | X = x] \cdot \prod_j (1 - P[D = d_j | D \geq 1, X = x]) \\ &= P[D \geq 1 | X = x] \cdot P[D = d_i | D \geq 1, X = x] \cdot \prod_j (1 - P[D = d_j | D \geq 1, X = x]) \quad (23) \\ &= P[D \geq 1 | X = x] \cdot P[D = d_i | D \geq 1] \cdot \prod_j (1 - P[D = d_j | D \geq 1]) \end{aligned}$$

Consider now the probability that the component is in exactly two damage states. Let D_1 denote the first of two nonzero damage states that the component is in, and D_2 is the second. Let $P[D_1 = d_i \& D_2 = d_j \& D \neq d_k | X = x]$ denote the probability that the component is in two damage states $D_1 = d_i$ and $D_2 = d_j$ but not any other damage state d_k ($k \neq i, k \neq j, i \neq j, i \neq 0, j \neq 0$, and $k \neq 0$) given $X = x$. It is given by

$$\begin{aligned} P[D_1 = d_i \& D_2 = d_j \& D \neq d_k | X = x] \\ &= P[D \geq 1 | X = x] \cdot P[D = d_i | D \geq 1] \cdot P[D = d_j | D \geq 1] \cdot \prod_k (1 - P[D = d_k | D \geq 1]) \quad (24) \end{aligned}$$

One could repeat for 3 damage states i, j , and k by repeating the pattern. It is the product of the probabilities that the component is in each damage state i, j , and k , and the probabilities that it is not in each remaining damage state l, m, n , etc.

2.3.3 MECE damage states

Remember that MECE means that, if the component is damaged (denoted by $D \geq 1$), it is in one and only one nonzero damage state. One can evaluate it by

$$\begin{aligned} P[D = d | X = x] &= 1 - P[D \geq 1 | X = x] & d = 0 \\ &= P[D \geq 1 | X = x] \cdot P[D = d | D \geq 1] & d \in \{1, 2, \dots, N_D\} \end{aligned} \quad (25)$$

where

$P[D \geq 1 | X = x] =$ probability that the component is damaged in some way, which one evaluates with a single fragility function. If the fragility function is taken as a lognormal CDF, see Equation (21). Note that the fragility function does not have to be a lognormal CDF, but that is common.

$P[D = d | D \geq 1]$ = probability that, if damaged, it is damaged in damage state d (and not any other value of D). Since under MECE damage states a component can only be in one damage state,

$$\left(\sum_{d=1}^{N_D} P[D = d | D \geq 1] \right) = 1 \quad (26)$$

2.4 Creating fragility functions

2.4.1 Three general classes of fragility functions

One can distinguish three general classes of fragility functions by the method used to create them:

1. Empirical. An empirical fragility function is one that is created by fitting a function to approximate observational data from the laboratory or the real world. The observational data are one of: (1) ordered pairs of environmental excitation and a binary indicator of failure (i.e., reaching or exceeding the specified limit state), for each of a set of individual assets; or (2) ordered sets of environmental excitation, number of assets exposed to that level of excitation, and the number of those that failed when subjected to the environmental excitation. Empirical fragility functions have been used in earthquake engineering at least since Kustu et al. (1982). See Merz (1991) for a notable work creating earthquake-related fragility functions for power-plant equipment.
2. Analytical. An analytical fragility function is one derived for an asset or class of assets by creating and analyzing a structural model of the asset class. One could argue that Czarnecki's (1973) doctoral thesis presents one of the earliest works deriving building-component fragility functions by structural analysis.
3. Expert opinion or judgment-based. An expert opinion fragility function is one created by polling one or more people who have experience with the asset class in question, where the experts guess or judge failure probability as a function of environmental excitation. ATC-13 (Applied Technology Council 1985) compiles a large number of judgment-based fragility functions for California buildings.

One can create fragility functions by a combination of these methods, for example by using judgment to create a fragility function for one limit state based on empirical data or an analytical model of another. One could argue that many of the fragility functions in Hazus-MH's earthquake module are created by such a hybrid approach. Or one can use Bayesian updating to modify a judgment-based fragility function using observational data. Although all three methods have been used for decades, Porter et al. (2007) may have been the first to categorize them and offer standard procedures for creating fragility functions by any of these methods.

2.4.2 Data that cannot be used to derive fragility functions

Consider now how fragility functions are made. First, some notes about kinds of data that cannot be used to derive fragility functions. One kind is data that are biased with respect to damage state. That is, specimens were observed because they were damaged, or because the damage was prominent or interesting in some way. Failure data gathered by reconnaissance surveys tend to be

biased in this way and therefore cannot be used to create fragility functions. Another kind is data where all the specimens were subjected to the same level of excitation. (Technically one could fit a 1-parameter fragility function to those data, but this author has never seen failure data that look as if they would be well approximated by a 1-parameter curve.)

2.4.3 What to know before trying to derive a fragility function

Before trying to derive a fragility function, define failure in unambiguous terms that do not require the exercise of judgment, i.e., where two people observing the same specimen would reach the same conclusion as to whether a specimen has failed or not. Beware damage scales that do not meet this test. Second, define the excitation to which specimens are subjected (maximum base acceleration, peak transient drift ratio, etc.) in similarly unambiguous terms. Third, select specimens without bias with respect to failure or nonfailure.

2.4.4 Actual failure excitation

In the unusual case where specimens were all tested in a laboratory to failure and the actual excitation at which each specimen failed is known, then one can fit a lognormal fragility function to the data as follows. This kind of data is referred to here as type-A data, A for actual failure excitation. Before using the following math, the analyst must clearly define “failure” and should know both the means of observing specimen excitation and failure, as well as a clear definition of the component or other asset category in question.

n_i = number of specimens, $n_i \geq 2$

i = index to specimens, $i \in \{1, 2, \dots, n_i\}$

r_i = excitation at which specimen i failed

$$\theta = \frac{1}{n_i} \sum_{i=1}^{n_i} \ln(r_i) \quad (27)$$

$$\beta = \sqrt{\frac{1}{n_i - 1} \sum_{i=1}^{n_i} (\ln(r_i/\theta))^2} \quad (28)$$

2.4.5 Bounding-failure excitation

Suppose one possesses observations where at least one specimen did not fail, at least one specimen did fail, and one knows the peak excitation to which each specimen was subjected, but not the actual excitation at which each specimen failed. These data are referred to here as bounding, or Type-B, data. Specimens are grouped by the maximum level of excitation to which each specimen was subjected. Assume the fragility function is reasonably like a lognormal cumulative distribution function and find the parameter values θ (median) and β (logarithmic standard deviation) as follows.

m_i = numbers of levels of excitation among the data, referred to here as bins, $m_i \geq 2$

- i = bin index, $i \in \{1, 2, \dots, m_i\}$
- r_i = maximum excitation to which specimens in bin i were subjected
- n_i = number of specimens in bin i , $n_i \in \{1, 2, \dots\}$
- f_i = number of specimens in bin i that failed, $f_i \in \{0, 1, \dots, n_i\}$

One proper way to estimate θ and β is by the maximum likelihood method, i.e., by finding the values of θ and β that have the highest likelihood of producing the observed data. At any level of excitation r_i , there is a probability of any individual specimen failing that is given by the lognormal CDF. Let p_i denote this probability:

$$p_i = \Phi\left(\frac{\ln(r_i/\theta)}{\beta}\right) \quad (29)$$

Assume that the failure of any two different specimens is independent conditioned on excitation. In that case, if one were to estimate the number of failed specimens in bin i , it would be proper to take that number as a random variable with a binomial distribution. Let F_i denote that random variable. The following equation gives the probability that one will observe f_i failures among n_i specimens with the per-occurrence failure probability p_i :

$$P[F_i = f_i] = \frac{n_i!}{f_i!(n_i - f_i)!} \cdot p_i^{f_i} \cdot (1 - p_i)^{n_i - f_i} \quad (30)$$

This is the binomial distribution. One finds the θ and β values that maximize the likelihood of observing all the data $\{n_1, f_1, n_2, f_2, \dots\}$ given excitations $\{r_1, r_2, \dots\}$. That likelihood is given by the product of the probabilities in equation 3, multiplied over all the bins. That is, find θ and β that maximize $L(\theta, \beta)$ in:

$$L(\theta, \beta) = \prod_{i=1}^{m_i} P[F_i = f_i] \quad (31)$$

One can explicitly maximize $L(\theta, \beta)$, but it is easier to use Excel or similar Matlab or other software. Excel's solver is straightforward.

It may be easier to remember a more approximate approach, which takes advantage of the fact that for large n_i , the binomial approximates the Gaussian distribution, in which case it is proper to minimize the weighted squares of the difference between the observed data and the idealized fragility function. That is, find θ and β that minimize the squared error term $\varepsilon^2(\theta, \beta)$ in:

$$\varepsilon^2(\theta, \beta) = \sum_{i=1}^{m_i} n_i \cdot \left(p_i - \frac{f_i}{n_i} \right)^2 \quad (32)$$

The difference between the fragility functions derived by these two different methods appears to be small compared with the scatter about the regression lines, so arguments about what is more proper tend to be academic compared with the choice of which one is easier. There is at least one more reasonable approach, called logistic regression, but again this approach tends to produce roughly the same values of θ and β , with differences that are small compared with data scatter.

2.4.6 Other data conditions

There are cases where none of the specimens failed (type-C, or capable, data), where failure is derived by structural analysis (type-D data), where expert opinion is used (type-E), or where

Bayesian updating is used to update an existing fragility function with new evidence (type U). For such situations, see Porter et al. (2007).

2.4.7 Dealing with under-representative specimens

If the specimens used to create the fragility function are very few in number or unrepresentative of the broader class whose fragility is desired, or if the excitation to which they were subjected was unlike real-world earthquake shaking, one can reflect added uncertainty associated with unrepresentative conditions by increasing the fragility function's logarithmic standard deviation. The FEMA P-58 guidelines for example suggest always increasing the logarithmic standard deviation of a fragility function that is derived from test data or observations, as follows.

$$\beta' = \sqrt{\beta^2 + \beta_u^2} \quad (33)$$

where β' is the new, increased value of the logarithmic standard deviation of the fragility function, β is the value derived using the test or post-earthquake observation data, and β_u is a term to reflect uncertainty that the tests represent real-world conditions of installation and loading, or uncertainty that the available data are an adequate sample size to accurately represent the true variability.

FEMA P-58 recommends values of β_u depending on how under-representative are the data. If any of the following is true, use a minimum value of $\beta_u = 0.25$, otherwise, use $\beta_u = 0.10$.

1. Data are available for five or fewer specimens.
2. In an actual building, a component can be installed in a number of different configurations, but all specimens were tested with the same configuration.
3. All specimens were subjected to the same loading protocol.
4. Actual behavior of the component is expected to be dependent on two or more demand parameters (e.g., simultaneous drift in two orthogonal directions), but specimens were loaded using only one demand parameter.

In the case of Type-B data, increasing β using Equation (33) introduces a bias in long-term failure probability and can cause the fragility function not to pass through the actual failure data well. If the data generally lie at excitation levels below the derived median capacity θ , which is common, then increasing β without adjusting θ will cause the fragility function to move up (to higher probabilities) relative to the data. To increase β while still ensuring that the derived fragility function passes through the data, one can adjust θ as follows:

$$\bar{r} = \frac{\sum_{i=1}^{N_i} r_i \cdot n_i}{\sum_{i=1}^{N_i} n_i} \quad (34)$$

$$\theta' = \bar{r} \cdot \left(\frac{\bar{r}}{\theta} \right)^{(-\beta'/\beta)} \quad (35)$$

In the case of type-A data, use $n_i = 1$ for all i in Equation (34). For example, imagine that 17 suspended ceilings of identical construction are installed in a large, stiff single-story building, a block away from a 2-story building with 3 suspended ceilings on the upper floor. A ceiling in the 1-story building and two ceilings in the 2-story building collapse in a particular earthquake. The

estimated roof accelerations in the two buildings are 0.25 and 0.45g, respectively. These type-B data are used to derive a fragility function in terms of peak floor acceleration, with $\beta = 0.3$ and $\theta = 0.4$ g. These conditions meet FEMA P-58's criteria 2 and 3, so $\beta_u = 0.25$. Applying the FEMA P-58 recommended value $\beta_u = 0.25$ and evaluating Equations (33), (34), and (35) yields

$$\begin{aligned}\beta' &= \sqrt{0.3^2 + 0.25^2} = 0.39 \\ \bar{r} &= \frac{(17 \cdot 0.25 + 3 \cdot 0.45)}{20} = 0.28 \\ \theta' &= 0.28 \cdot \left(\frac{0.28}{0.4} \right)^{(-0.39/0.30)} = 0.45\end{aligned}$$

Figure 12 illustrates the data, the fragility function before increasing β (the solid line), and the fragility function after increasing β . Note how the two curves cross at $r = \bar{r}$ and how $\theta' > \theta$. The solid curve passes through the data because there are only two data points, but it passes over the first data point and below the second, closer to the first because the first represents more data.

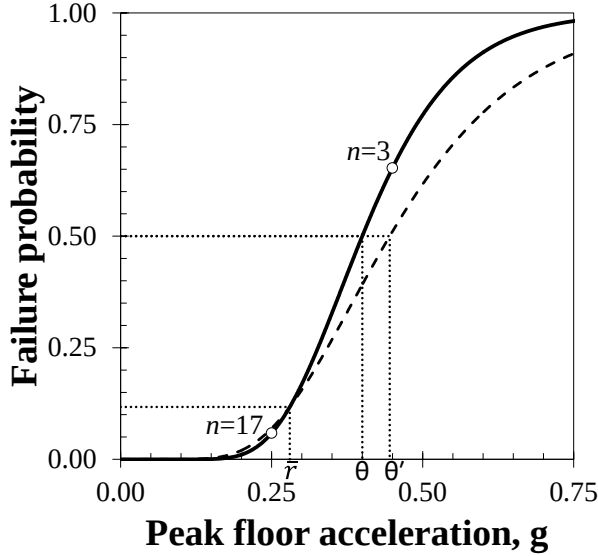


Figure 12. Increasing beta and adjusting theta to account for under-representative samples

2.4.8 Dealing with fragility functions that cross

Some components have two or more fragility functions. Any two lognormal fragility functions i and j with logarithmic standard deviations $\beta_i \neq \beta_j$ will cross. Why? You will see if you sketch a few pairs of fragility functions with different values of θ and β , remembering that a larger β produces a wider fragility function. Anyhow, fragility functions that cross can be a problem for sequential damage states i and j , where $i < j$, because Equation (19) produces a (meaningless) negative probability of being in damage state i at certain values of x . Consider four cases:

1. If $\theta_i = \theta_j$ and $\beta_i < \beta_j$, the fragility functions cross at the median and Equation (19) gives a negative probability of being in damage state i at $x < \theta_i$.
2. If $\theta_i = \theta_j$ and $\beta_i > \beta_j$, they cross at the median and Equation (19) gives a negative probability of being in damage state i at $x > \theta_i$.

3. If $\theta_i < \theta_j$ and $\beta_i < \beta_j$, they cross somewhere at $x < \theta_i$ and Equation (19) gives a negative probability of being in damage state i below that value of x .
4. If $\theta_i < \theta_j$ and $\beta_i > \beta_j$, they cross somewhere at $x > \theta_j$ and Equation (19) gives a negative probability of being in damage state i above that value of x .

There are at least three ways to deal with the problem.

1. **Keep it simple.** Force all probabilities to be nonnegative by replacing Equation (19) with Equation (36). In the equation, D is the uncertain damage state ($D \in \{0, 1, \dots, m\}$), d is a particular value of D , X is uncertain excitation, x is a particular value of X , and m is the number of possible damage states other than the undamaged state.

$$\begin{aligned}
 P[D = d | X = x] &= 1 - P[D \geq 1 | X = x] & d = 0 \\
 &= \max(P[D \geq d | X = x] - P[D \geq d + 1 | X = x], 0) & 1 \leq d < m \\
 &= P[D \geq d | X = x] & d = m
 \end{aligned} \tag{36}$$

2. **Make them not cross, the easy way.** Find θ and β values for each damage state, and then revise them as in Equation 37. In the equation, θ_d and β_d are the (initially derived) median and logarithmic standard deviation of the fragility function for damage state d , β' is the new, common value of the logarithmic standard deviation of capacity, which we apply to all damage states, and θ_d' is the new, adjusted value of median for damage state d . Having a common logarithmic standard deviation prevents the fragility functions from crossing, and rotates each fragility function about its 20th percentile value. That is, for each damage state, the initial and adjusted fragility function cross at the same value of x —the one with 20% failure probability. Why 20%? Rotating about the 20th percentile tends to keep long-term failure rates constant. Other authors use 10%, and I use 10% elsewhere in this beginner's guide, but in recent research (Porter 2017) found that 20% is better under some common conditions.

$$\begin{aligned}
 \beta' &= \frac{1}{m} \sum_{d=1}^m \beta_d & \text{for all } d \in \{1, 2, \dots, m\} \\
 \theta_d' &= \theta_d \cdot \exp(0.842 \cdot (\beta' - \beta_d))
 \end{aligned} \tag{37}$$

3. **Make them not cross, by maximum-likelihood estimation.** One harder but more proper way to prevent the fragility functions from crossing is to use the maximum-likelihood method of deriving the fragility functions simultaneously with a single common β and separate medians θ for each damage state d . Suppose you have some number of specimens with bounding-failure data about m damage states, and you group the specimens into s sets of approximately equal excitation x_i , where $i \in \{1, 2, \dots, s\}$. Find $(\theta_1, \theta_2, \dots, \theta_m, \beta)$ to maximize O :

$$O = \prod_{d=1}^m \prod_{i=1}^s P_Y(y) \tag{38}$$

where, within set i , you have n observations, of which y reached or exceeded damage state d . If failures are independent conditioned on excitation x , the probability of observing y failures is given by the binomial distribution, as in Equation (39).

$$P_Y(y) = \frac{n!}{y!(n-y)!} \cdot p^y (1-p)^{n-y} \tag{39}$$

Since we are dealing with lognormal fragility functions, the probability p that any specimen in reaches or exceeds damage state d is given by

$$p = \Phi\left(\frac{\ln(x/\theta_d)}{\beta}\right) \quad (40)$$

For example, suppose you are interested in 2 damage states. You observe 13 specimens after an earthquake and group them into 4 sets of specimens that experienced approximately equal excitation $x_1 = 0.1g$, $x_2 = 0.2g$, $x_3 = 0.3g$, and $x_4 = 0.4g$. Sets 1 and 2 have 5 specimens each, set 3 has 2 specimens, and set 4 has 1 specimen. In set 1, 4 specimens were undamaged and 1 was in damage state 1. In set 2, 3 were undamaged, 2 were in damage state 1. In set 3, 1 was in damage state 1 and the other in damage state 2. In set 4, the single specimen was in damage state 2. Let us set up the problem in a spreadsheet with the initial guess that $\beta = 0.4$, $\theta_1 = 0.25$, and $\theta_2 = 0.35$. The spreadsheet might look like Table 1 this when we set it up:

Table 1. Example maximum likelihood estimation of lognormal fragility functions with type-B data and multiple sequential damage states, initial guess

$\beta =$ 0.4
 $\theta_1 =$ 0.25 g
 $\theta_2 =$ 0.35 g
 $O =$ 0.0214

Set	Excitation, g	Specimens	Damage state 1			Damage state 2		
i	x	n	y	p	P	y	p	P
1	0.1	5	0	0.011	0.946	0	0.001	0.996
2	0.2	5	2	0.288	0.300	0	0.081	0.656
3	0.3	2	2	0.676	0.457	1	0.350	0.455
4	0.4	1	1	0.880	0.880	1	0.631	0.631

Notice the values of y for set 3, damage state 1: although only one specimen was *in* damage state 1, two specimens *reached or exceeded* damage state 1, so $y = 2$, not 1. Similarly, for set 4 and damage state 1, the single specimen was in damage state 2, but it had also *exceeded* damage state 1, so $y = 1$, not 0, for damage state 1. The values of p and P are calculated as in Equation (40) and (39), respectively, and O is calculated as the product of all the P values, as in Equation (38). We instruct the spreadsheet software to maximize O by varying β , θ_1 , and θ_2 , subject to some reasonable constraints, such as $0.2 \leq \beta$ and $0 < \theta_1 < \theta_2$. After maximizing O , the spreadsheet finds the solution shown in Table 2. The solution is illustrated in Figure 13.

Table 2. Example maximum likelihood estimation of lognormal fragility functions with type-B data and multiple sequential damage states, solution

$$\begin{aligned}\beta &= 0.2 \\ \theta_1 &= 0.21 \text{ g} \\ \theta_2 &= 0.30 \text{ g} \\ O &= 0.1336\end{aligned}$$

Set	Excitation, g	Specimens	Damage state 1			Damage state 2		
<i>i</i>	<i>x</i>	<i>n</i>	<i>y</i>	<i>p</i>	<i>P</i>	<i>y</i>	<i>p</i>	<i>P</i>
1	0.1	5	0	0.000	0.999	0	0.000	1.000
2	0.2	5	2	0.419	0.344	0	0.019	0.910
3	0.3	2	2	0.966	0.933	1	0.479	0.499
4	0.4	1	1	0.999	0.999	1	0.917	0.917

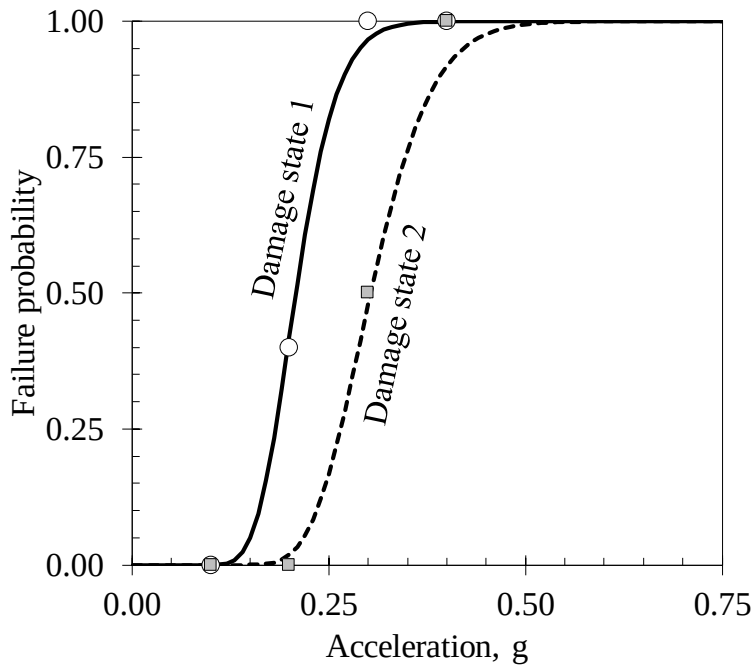


Figure 13. Illustration of maximum likelihood estimation of lognormal fragility functions with type-B data and multiple sequential damage states, solution

2.5 Some useful sources of component fragility functions

FEMA P-58 produced a large suite of component fragility functions. See https://www.atcouncil.org/files/FEMAP-58-3_2_ProvidedFragilityData.zip. By “component” is meant a building component, like an RSMeans assembly such as glass curtain walls. The component fragility functions in FEMA P-58 mostly use as excitation measures the peak transient interstory drift ratio to which a drift-sensitive specimen is subjected, or the peak absolute acceleration of the floor or roof to which the specimen is attached, for acceleration-sensitive components. In some cases peak residual drift is used (e.g., doors getting jammed shut). There are other measures of excitation as well. FEMA P-58 failure modes are defined with symptoms of

physical damage or nonfunctionality requiring particular, predefined repair measures. They are never vague qualitative states such as “minor damage” that require judgment to interpret. Most of the FEMA P-58 fragility functions are derived from post-earthquake observations or laboratory experiments. Some are based on structural analysis and some are derived from expert opinion. All were peer reviewed. Johnson et al. (1999) also offer a large library of component fragility functions, many based on post-earthquake observations of standard mechanical, electrical, and plumbing equipment in power facilities.

The HAZUS-MH technical manual (NIBS and FEMA 2009) offer a number of whole-building fragility functions, defining for instance probabilistic damage to all the drift-sensitive nonstructural components in the building in 4 qualitative damage states (slight, moderate, extensive, complete) as a function of a whole-building measure of structural response (spectral acceleration response or spectral displacement response of the equivalent nonlinear SDOF oscillator that represents the whole building).

3. Vulnerability

So far, this work has discussed damageability in terms of the occurrence of some undesirable event such as a building collapse that either occurs or does not occur. Damageability is also measured in terms of the degree of the undesirable outcome, called loss here, in terms of repair costs, life-safety impacts, and loss of functionality (dollars, deaths, and downtime), or in terms of environmental degradation, quality of life, historical value, and other measures. When loss is depicted as a function of environmental excitation, the function can be called a vulnerability function. A seismic vulnerability function relates uncertain loss to a measure of seismic excitation, such as spectral acceleration response at some damping ratio and period. A seismic vulnerability function usually applies to a particular asset class.

Vulnerability is not fragility. Vulnerability measures loss, fragility measures probability. Vulnerability functions are referred to many ways: damage functions, loss functions, vulnerability curves, and probably others.

This work does not provide guidance on how to derive vulnerability functions, but does briefly discuss the three leading methods to derive them, referring to some useful prior works and discussing the depiction and use of vulnerability functions.

3.1 Empirical vulnerability functions

One can classify methods to derive vulnerability functions into three general approaches: empirical, analytical, and expert opinion. Empirically derived vulnerability functions are generally the most desirable from a risk management viewpoint because they are derived wholly from observations of the actual performance of assets in real earthquakes. For that reason they are highly credible. One collects observations of many facilities without preference to degree of damage (i.e., without selecting samples because they are damaged), recording:

x_i = environmental excitation (ground motion, windspeed, etc.) at each property i
 y_i = loss (repair costs, fatality rate, duration of loss of function, etc.) at property i

c_i = attributes of property i (structural material, lateral force resisting system, height, age, etc.)

One then groups samples by one or more attributes (e.g., by model building type) and for each group performs a regression analysis to fit a vulnerability function, usually to the mean and to the standard deviation as functions of environmental excitation. The vulnerability function can be expressed in a table of mean and standard deviation of loss at each of many levels of excitation for the given class of facility. Empirical wind and flood vulnerability functions date at least to the 1960s (e.g., Friedman 1984), empirical earthquake vulnerability functions at least to the 1970s (e.g., McClure 1973). Wesson et al. (2006) offer one of the most thorough studies of the empirical vulnerability of buildings.

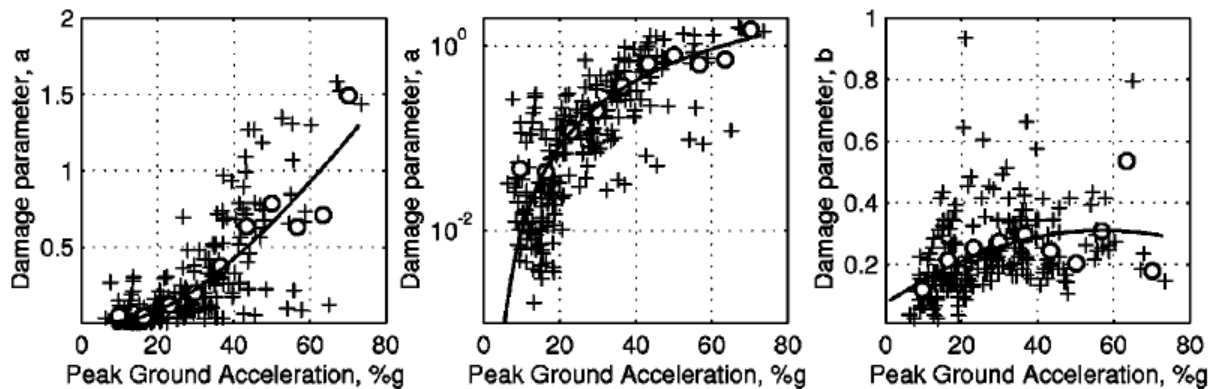


Figure 14. Regression analysis of damage to woodframe buildings in the 1994 Northridge earthquake (Wesson et al. 2006)

Credibility is its great attraction, but the empirical method has drawbacks:

1. Many building types have not yet experienced strong motion, such as the combined shearwall and frame highrise systems built in the Western United States after the 1994 Northridge earthquake.
2. Observations tend to be few or missing at high levels of excitation, where high losses are most likely.
3. Engineers sometimes imagine they can look at a building from the outside and estimate repair cost, but few have any training or experience in the nontrivial practice of construction cost estimation. Professional construction cost estimators would never estimate costs without visually examining all the damage. Too much loss can be hidden from a superficial view of the front of a building.
4. It can be very hard to get loss data either from construction permits or insurers. The cost of a construction permit is generally proportional to the size of the construction contract, so permits tend to reflect an underestimate of repair cost. Despite the hopes and expectations of decades of researchers before they talked to insurers, insurers almost never part with or share their loss data. Losses are sensitive business data for insurers, valuable intellectual property, and they can be costly to extract in a form useful to researchers.
5. It can be difficult to estimate shaking at the observations. Accelerometers are commonly spaced many miles or even tens of miles apart even in densely population areas, and ground motion can vary greatly and not smoothly between them.

6. Empirical observations tend to shed light neither on the causes of damage, nor on the effects of building details such as soft-story conditions, because researchers tend not to record these details, or record too few observations to distinguish the effects.
7. It can be very hard to see signal within the noise.

3.2 Analytical vulnerability functions

Analytical methods use engineering first principles to estimate the vulnerability function. Almost all analytical methods employ the same four analytical stages, illustrated in Figure 15 (Porter 2003). In the method, one first defines the asset at risk in some detail: its location, site conditions, structural design, architectural design, and even inventories the damageable mechanical, electrical, and plumbing elements, as well the furnishings, fixtures, equipment, and people in the facility. One next performs a hazard analysis, estimating the probability or frequency with which various levels of environmental excitation occur. In earthquake engineering, the hazard analysis includes the selection of many ground motion time histories to represent each of many levels of intensity. The next stage is structural analysis, in which one estimates the member forces and deformations, story drifts and accelerations, throughout the facility at each level of excitation. The structural responses are then input to component fragility functions to estimate probabilistic damage to each damageable component at each level of excitation. Probabilistic damage is then input to a loss analysis, in which one estimate the uncertain cost to repair damage, life-safety impacts, and time to repair damage (the dollars, deaths, and downtime). The process is repeated many times to propagate uncertainties and to relate environmental excitation such as ground motion to loss. The vulnerability function and hazard curve can be integrated to estimate and manage risk as described elsewhere in this document.

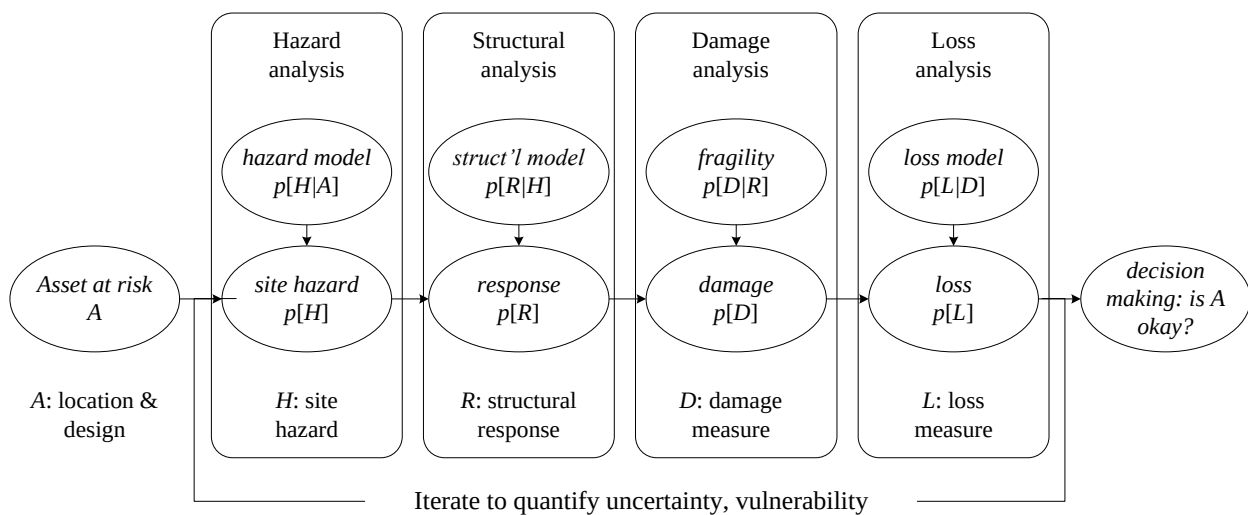


Figure 15. Analytical methods for estimating seismic vulnerability of a single asset (Porter 2003).

The analytical method can be applied to develop vulnerability functions for multiple specimens of a class of assets. The vulnerability functions are treated as a probabilistic mixture of individual buildings to estimate the vulnerability function for a building class, with an additional stage one can call the asset analysis (Figure 16). For the general methodology, see Porter et al. (2015). For the case study illustrated in Figure 17, see Kazantzi et al. (2013).

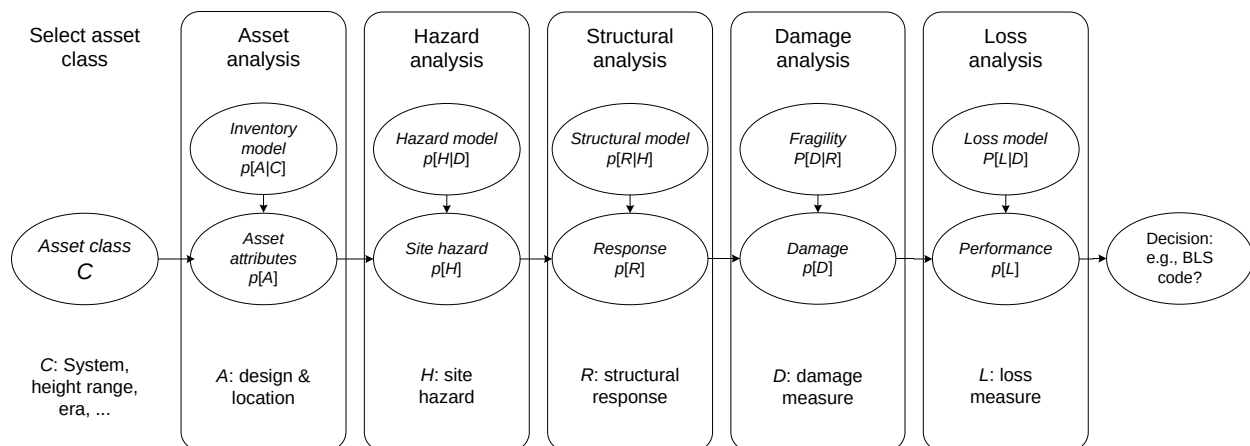


Figure 16. Accounting for variability in design within the asset class, one can extend PBEE to estimate seismic vulnerability of an asset class

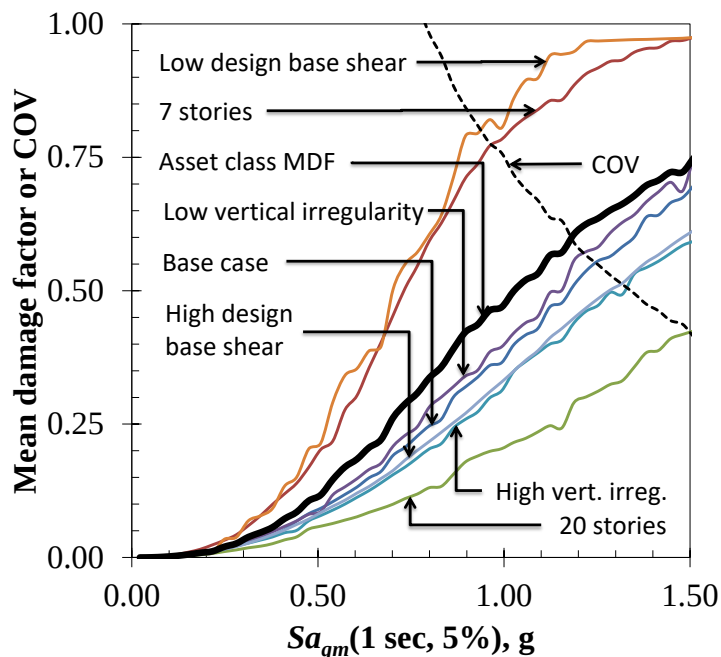


Figure 17. Example analytical vulnerability function for highrise post-1980 reinforced concrete moment frame office building in the Western United States (Kazantzi et al. 2013)

The analytical method provides insight where the empirical method does not. It can be used to estimate the vulnerability of building types that have not yet experienced strong motion. It sheds light on the behavior of buildings at higher levels of excitation than have shaken the building type of interest in actual earthquakes. It provides a method to estimate repair costs, life-safety impacts, and downtime without relying on proprietary insurance data or questionable construction permits. It avoids problems associated with sparse accelerometers. And it can shed light on the causes of damage and the effects of building details such as soft-story conditions.

All these strengths come with two important costs: first, the method is time-consuming, taking days or weeks to estimate the behavior of a single building or class of buildings. Second, it lacks built-in validation. While all the elements of the analysis may be very solid, validated by

earthquake experience, tests, and construction experience, the overall vulnerability function lacks the credibility of an empirical vulnerability function. One can perform a cross-validation of a new vulnerability function against existing, related ones, but validation against other models is not as compelling as derivation from actual whole-building disaster data.

Some history of the method: The earliest effort to derive a seismic vulnerability function analytically was probably that of Czarnecki (1973). Kustu et al. (1982) advanced Czarnecki's method using laboratory test data of the fragility of building components and applied construction cost-estimation principles to the estimation of repair costs. In work for the CUREE-Kajima Joint Research Program, the present author (Beck et al. 1999, Porter 2000) accounted for and propagated uncertainties in ground motion, structural features, and various aspects of the damage and loss-analysis stages, and employed construction-contracting principles to estimate downtime. The present author and various researchers working for the Pacific Earthquake Engineering Research Center in the early 2000s added careful selection of recorded ground motions to the hazard analysis, incremental dynamic analysis (IDA), separate treatment of collapse, and large databases of ground motion and component damage. The Applied Technology Council (Applied Technology Council 2012) encoded the procedures developed by the present author, other PEER researchers, and various others into professional guidelines for performance-based earthquake engineering.

In earlier work for FEMA, Kircher et al. (1997) developed an analytical vulnerability procedure for the national risk-management software Hazus-MH (e.g., NIBS and FEMA 2012). The building is idealized as a single-degree-of-freedom nonlinear oscillator. The method employs nonlinear pseudostatic structural analysis to estimate the acceleration and displacement of the oscillator, which is then translated to acceleration and drift imposed on three aggregate building components: structural, nonstructural drift-sensitive, and nonstructural accelerations-sensitive components. Four damage states are defined for each (defined using sometimes troublesomely qualitative or subjective language) along with repair costs and other consequences. The great power of the methodology is that the authors estimated all the parameters required to estimate repair costs and other consequences for virtually every building type in the United States.

3.3 Expert opinion vulnerability functions

Where empirical data are lacking and analytical methods are too costly, one can draw on expert opinion, as was done in the seminal work ATC-13 (Applied Technology Council 1985). Formal methods to elicit expert opinion date at least to the 1960s, when the RAND Corporation (Gordon and Helmer 1964) and developed a procedure dubbed the Delphi Process (a reference to the Oracle of Delphi) to elicit opinion on a variety of scientific and social of the coming 50 years. For example, the RAND experts predicted a world population of 5.1 billion by 2000 (it was 6.1 billion, reasonably close at a distance of 36 years), controlled thermonuclear power as a common energy source (the first nuclear power plant was online 10 years previous), functional regional weather control, high-IQ machines, mining on the moon, and various other hits and misses.

The authors of ATC-13 employed the Delphi Process to elicit seismic vulnerability functions for 78 classes of facility (buildings, bridges, and others) in terms of dollars, deaths, and downtime versus MMI. Essentially the process involves collecting a few experts (on the order of 5 to 10) in a room, presenting them with an asset class of interest, and asking them to guess (or judge, to

dignify the process somewhat) losses to the asset class at various levels of excitation. ATC-13 had the experts self-rate their expertise. Recent earthquake engineering researchers have applied methods to objectively measure the expertise of each contributor. The guesses are treated as if they were actual observations, weighted in proportion to the self-judged or tested expertise, and combined to produce vulnerability functions for the class.

Expert opinion is very efficient, capable of produce a new vulnerability function at the cost of a few person-hours each, of estimating the performance of buildings that have not yet experienced strong motion, and of estimating the effects of building features such as soft-story conditions. Its great disadvantages are: (1) lack of credibility because it cannot be objectively tested other than through cross-validation; and (2) underestimation of uncertainty. Experts often have an exaggerated idea of their own sagacity. Item 2 can be controlled with careful conditioning of the experts, though this seems never to have been done in the few earthquake engineering applications of which the author is aware.

3.4 How to express a vulnerability function

When a vulnerability function measures repair cost, it is commonly normalized by replacement cost new (RCN), a term which here means the cost of a similar new property having the nearest equivalent utility as the property being appraised, as of a specific date (American Society of Appraisers 2013). RCN excludes land value and usually refers to part or all of the fixed components of a building or other asset (structural, architectural, mechanical, electrical, and plumbing components) or to its contents. Repair cost divided by RCN is referred to here as damage factor (DF). Some authors call it damage ratio, fractional loss, or other terms. The expected value of DF conditioned on excitation is commonly called mean damage factor (MDF). Sometimes it is assumed that if DF exceeds some threshold value such as 0.6, the property is not worth repairing and is a total loss, so repair-cost vulnerability functions can jump abruptly from 0.6 (or other threshold value) to 1.0 with increasing excitation. In principle DF can exceed 1.0 because it can cost more to repair a building than to replace it.

When a vulnerability function measures life-safety impacts, it commonly measures the fraction of indoor occupants who become casualties (that is, they are killed or experience a nonfatal injury to some specified degree) as a function of excitation. There are a variety of human-injury scales, some used by civil engineers and others used by public health professionals. Before using a terms such a minor injury, one should be sure its meaning is entirely clear and meaningful to the intended user of the vulnerability information. Civil engineers sometimes use casualty scales that are ambiguous or not useful to public health professionals.

Downtime is commonly measured in terms of days or fractions of a year during which the asset cannot be used for its intended purposes. Sometimes it measures the time from the environmental shock (the earthquake, in the case of a seismic vulnerability function) to the time when all repairs are completed, which includes both the time required to perform the repairs and a previous period during which damage is assessed, repairs are designed, financing is arranged, repairs are bid out, and the repair contractor mobilizes to the site.

Many vulnerability functions are expressed with conditional probability distributions that give a probability that loss will not exceed some specified value given the excitation, for a particular asset class. The distribution is often assigned a parametric form such as lognormal or beta, in which case the parameters of the distribution are all required, some or all of them conditioned on excitation.

For use in subsequent discussion of earthquake risk, let

X = uncertain loss

$y(s)$ = expected value of loss given shaking s , called the mean seismic vulnerability function

$F_{X|S=s}(x) = P[X \leq x | S=s]$ = the cumulative probability distribution function of loss conditioned on shaking $S = s$. It is sometimes taken as lognormal, sometimes a beta distributed (see the sidebar)

Sidebar: the beta distribution

The beta distribution is a parametric probability distribution, meaning a probability distribution that is completely defined by one or more parameters. The beta distribution has two parameters. It has lower and upper and lower bounds of 0.0 and 1.0, meaning that an uncertain quantity that is distributed like the beta distribution has zero probability of taking on a value less than 0.0 or greater than 1.0. The beta is desirable for use in risk modeling partly because of those bounds. One can for example idealize a facility's damage factor (repair cost divided by replacement cost new) using the beta distribution with a lower bound of zero and an upper bound of 1.0.

The beta distribution has two more parameters often called shape parameters, denoted here by a and b , that allow the probability density function to take on a variety of shapes between the lower 0.0 and 1.0. The parameters do not have much meaning by themselves, and the present author has usually found it convenient to define them in terms of the first mean, denoted here by m , and the variance, denoted here by v . Given $m \neq 0$, $m \neq 1$, and $v \neq 0$ one calculates the parameters a and b as follows:

$$a = -\frac{m(m^2 - m + v)}{v} \quad (41)$$

$$b = \frac{(m-1)(m^2 - m + v)}{v} \quad (42)$$

Common software will calculate the probability density function and cumulative distribution function of the beta distribution. For example, in Microsoft Excel, use `beta.dist(x, a, b, cumulative, [lower], [upper])`, where x , a , and b are as defined above, and lower and upper are optional parameters if the user wants something other than lower and upper bounds of [0, 1]. For information, the probability density function, denoted here by $f_X(x)$ and meaning the probability that X will take on a particular value x , per unit x , is calculated as follows

$$f_X(x) = \frac{x^{a-1} \cdot (1-x)^{b-1}}{B(a,b)} \quad (43)$$

and the cumulative distribution function, denoted here by $F_X(x)$, is given by

$$F_x(x) = \sum_{j=a}^{a+b-1} \binom{a+b-1}{j} x^j (1-x)^{a+b-1-j} \quad (44)$$

where $B(a,b)$ denotes the beta function and is itself a function of the gamma function denoted here by $\Gamma(z)$. See Equations (45) and (46). If desired, one can use common software to calculate $\Gamma(a)$, $\Gamma(b)$, and $\Gamma(a+b)$. In Excel for example, use $\Gamma(a) = \exp(\text{gammaln}(a))$.

$$B(a,b) = \frac{\Gamma(a) \cdot \Gamma(b)}{\Gamma(a+b)} \quad (45)$$

$$\Gamma(z) = \int_0^{\infty} t^{z-1} e^{-t} dt \quad (46)$$

In Equation (44), $\binom{p}{q}$ denotes the combination function, p combine q .

4. Hazard

4.1 Probabilistic seismic hazard analysis

Seismic hazard refers here to an uncertain relationship between the level of some measure seismic excitation and the frequency or probability of a particular location experiencing at least that level of excitation. As used here, hazard is that relationship. It is *not* the measure of excitation, the occurrence of an earthquake, nor the probability or frequency of excitation. These terms are not to be used interchangeably.

Seismic hazard is quantified many ways. One is through a hazard curve, commonly depicted on an x-y chart where the x-axis measures shaking intensity at a site (shaking intensity means the severity of the ground motion, which is the environmental excitation that nature imposes on the facility) and the y-axis measures either exceedance probability in a specified period of time or exceedance rate in events per unit time. Cornell (1968) applied the theorem of total probability to create a hazard curve. What follows here is a summary of current procedures to perform probabilistic seismic hazard analysis (PSHA), but is conceptually identical to Cornell's work.

Engineers sometimes refer to the quantity by which intensity is measured as the intensity measure. Earth scientists call it ground motion. The present work uses the term intensity measure (IM). Some authors distinguish between the intensity measure type (IMT), such as 5% damped spectral acceleration response at 0.2 second period, and the intensity measure level (IML), a particular value of the IM such as 0.4g. In any case, IMT must be completely specified. If using damped elastic spectral acceleration response, one states the period, damping ratio, and whether one is referring to the geometric mean of two orthogonal directions or the maximum direction or other directional reference.

To estimate seismic hazard, one applies the theorem of total probability to combine the uncertain shaking at the site caused by a particular fault rupture and the occurrence frequency or probability of that rupture. Earth scientists create models called earthquake rupture forecasts that specify the

locations and rates at which various fault produce earthquakes of various sizes, e.g., the Uniform California Earthquake Rupture Forecast version 2 (UCERF2, Field et al. 2007). The uncertain shaking given a fault rupture is quantified using a relationship variously called an attenuation relationship or a ground-motion prediction equation, such as the next-generation attenuation (NGA) relationships presented in the February 2008 issue of *Earthquake Spectra*. Mathematically, a hazard curve is created as follows. Let:

H = uncertain severity of ground motion at the building site, maybe $S_a(T, 5\%)$

h = a particular value of H

$G(h)$ = frequency (events per unit time) with which $H > h$, i.e., the number of events per unit time in which at least once during the event, $H > h$

n_E = number of earthquake rupture forecast models to consider, $n_E \in \{1, 2, \dots\}$. For example, in UCERF2, there were 480 discrete combinations of fault model, rupture model, magnitude-area relationship, and several other modeling choices that together are represented by a logic tree that begins with fault model, branches to rupture model, then to magnitude-area relationship, etc. For UCERF2, $n_E = 480$.

E = the “correct” earthquake rupture forecast, which is uncertain. $E \in \{1, 2, \dots, n_E\}$

e = an index to a particular earthquake rupture forecast, $e \in \{1, 2, \dots, n_E\}$

$P[E=e]$ = Bayesian probability assigned to earthquake rupture forecast e . In UCERF2, this would be the product of the conditional probabilities (weights) of the individual branches in the logic tree that represents UCERF2. By conditional probability is meant that each branch’s probability can (though only sometimes do) depend on which choices came before it.

n_A = number of attenuation relationships (also called ground motion prediction equations) to be employed, $n_A \in \{1, 2, \dots\}$

A = the “correct” ground-motion-prediction equation, i.e., the one that expresses the true state of nature, which is uncertain

a = an index to ground-motion prediction equations

$P[A=a]$ = Bayesian probability assigned to ground-motion-prediction equation a , i.e., the probability that ground-motion-prediction equation a actually reflect the state of nature, the way nature actually work, is the correct ground-motion-prediction equation

$n_F(e)$ = number of fault sections in earthquake rupture forecast e , $n_F(e) \in \{1, 2, \dots\}$

f = an index to faults section, $f \in \{1, 2, \dots, n_F(e)\}$

m_0 = minimum magnitude to consider

Δm = an increment of magnitude, say $\Delta m = 0.1$

$M_{\max}(f|E=e)$ = maximum magnitude of which fault f is deemed capable under earthquake rupture forecast e , $M_{\max}(f|E=e) \in \{m_0 + \frac{1}{2} \cdot \Delta m, m_0 + \frac{3}{2} \cdot \Delta m, \dots\}$

$n_o(f, m)$ = number of locations within fault section f that can generate a rupture of magnitude m , $n_o(f, m) \in \{1, 2, \dots\}$

o = an index to locations on fault section f , in $o \in \{1, 2, \dots, n_o(f, m)\}$

$G(f, m, o|E=e)$ = frequency (events per unit time) with which fault section f ruptures at location o producing earthquake of magnitude $m \pm \frac{1}{2} \cdot \Delta m$ given earthquake rupture forecast e

V_s = uncertain site soil, potentially measured by NEHRP site soil classification or shearwave velocity in the top 30m of soil (V_{s30}), or something else.

v = a particular value of V

$P[H > h | m, r, v, a]$ = probability that $H > h$ given earthquake magnitude m at distance r on soil with soil type v using ground-motion-prediction equation a . Note that, given a known site

location, fault segment f and location along the fault segment o , distance r from the site to the fault is known. Note that ground-motion prediction equations use a variety of distance measures. As of this writing, most ground-motion prediction equations give an equation for the mean of the natural logarithm of H given m , r , and v , for the logarithmic standard deviation of H (i.e., the standard deviation of the natural logarithm of H), and assume a lognormal distribution of H conditioned on m , r , and v . Let $m_{\ln H}$ and $s_{\ln H}$ denote the mean of $\ln(H)$ and the standard deviation of $\ln(H)$, respectively, given m , r , and v , assuming ground-motion-prediction equation a . Under these conditions,

$$P[H > h | m, r, v, a] = 1 - \Phi\left(\frac{\ln(h) - m_{\ln H}}{s_{\ln H}}\right) \quad (47)$$

One can now estimate the hazard curve by applying the theorem of total probability. Suppose one already knew soil conditions V with certainty. Then

$$G(h) = \sum_{e=1}^{n_E} \sum_{a=1}^{n_A} \sum_{f=1}^{n_f(e)} \sum_m \sum_{o=1}^{n_o(f,m)} P[H > h | m, r, v, a] \cdot G(m, f, o | E = e) \cdot P[A = a] \cdot P[E = e] \quad (48)$$

where the summation over m means that one considers each $m \in \{m_0 + \frac{1}{2} \cdot \Delta m, m_0 + \frac{3}{2} \cdot \Delta m, \dots, M_{\max}(f | E = e)\}$.

4.2 Hazard rate versus probability

Seismic hazard is often expressed in terms of exceedance probability, rather than in terms of exceedance rate. The distinction is this: exceedance probability is the probability that shaking of $H > h$ will occur at least once in a given period of time. That means that it is the probability that it $H > h$ will occur exactly once, plus the probability that it will occur exactly twice, etc. For some calculations the analyst wants rate (number of events per unit time) not probability (change that it occurs one or more times in a given time period).

The two can be related using a concept called a Poisson process. From the Wikipedia's article on the Poisson Process: "In probability theory, a Poisson process is a stochastic process which counts the number of events and the time that these events occur in a given time interval. The time between each pair of consecutive events has an exponential distribution with parameter G [the parameter is the occurrence rate per unit time] and each of these inter-arrival times is assumed to be independent of other inter-arrival times [meaning that the time between the 2nd and 3rd occurrence is independent of the time between the 1st and 2nd occurrence—knowing one tells you nothing about the other]. The process is named after the French mathematician Siméon-Denis Poisson and is a good model of radioactive decay, telephone calls, and requests for a particular document on a web server, among many other phenomena."

Modeling earthquakes as Poisson arrivals is convenient in part because in a Poisson process, arrival rate and occurrence probability have this relationship:

$$G = \frac{-\ln(1 - P)}{t} \quad (49)$$

where

G = occurrence rate, i.e., events per unit time

P = probability that at least one event will occur in time t

So if a hazard curve were represented as the $P(h)$, the probability that $H > h$ at least once in a particular period of time t , one could use Equation (49) to estimate the occurrence rate $G(h)$, the average number of times that $H \geq h$ per unit time. One can also rearrange Equation (49) to give probability as a function of rate:

$$P = 1 - e^{-G \cdot t} \quad (50)$$

So with the occurrence rate $G(h)$ of earthquakes causing $H > h$, one can calculate the probability that at least one earthquakes with $H > h$ will occur in a given time t .

4.3 Measures of seismic excitation

These are many common measures of seismic excitation. Some measure ground motion and some measure structural response or excitation to which the components of a building, bridge, or other structural system are subjected. This section introduces common ones. The earthquake engineer should be very familiar with any measure of ground motion that he or she commonly uses¹.

4.3.1 Some commonly used measures of ground motion

Peak ground acceleration (PGA). This is the maximum value of acceleration of a particular point on the ground at any time during an earthquake. Often PGA is estimated as the geometric mean (the square root of the product) of the maximum values of PGA parallel to each of two orthogonal axes. PGA is sometimes called zero-period acceleration (ZPA), meaning the spectral acceleration response of a single-degree-of-freedom elastic oscillator with zero, or near-zero, period. Before using a PGA value, be sure you know whether it refers to geometric mean, maximum-direction value, or something else.

Peak ground velocity (PGV). Like PGA, except maximum velocity of a point on the ground rather than acceleration.

Peak ground displacement (PGD). Like PGA, except maximum displacement relative to a fixed datum.

Spectral acceleration response ($S_a(T,z)$). This usually refers to damped elastic spectral acceleration response at some specified index period such as $T = 0.3$ sec, 1.0 sec, 3.0 sec, etc. and specified damping ratio such as $z = 5\%$, at a particular point on the ground. To be precise, $S_a(T,z)$ is the absolute value of the maximum acceleration relative to a fixed datum of a damped elastic single-degree-of-freedom harmonic oscillator with period T and damping ratio z when subjected to a particular one-degree-of-freedom ground motion time history at its base. In practice, it typically refers to the geometric mean of spectral acceleration response parallel to each of two orthogonal horizontal axes. It is so often measured for $z = 5\%$ that damping ratio is often not mentioned. Before using $S_a(T,z)$, be sure you know T , z , and whether it is a geometric mean value or the maximum-direction value or something else.

¹ Again the CU graduate student should be able to explain it in his or her thesis defense.

Spectral displacement response ($S_d(T,z)$). Like $S_a(T,z)$ but for relative spectral displacement (displacement of the oscillator relative to its base, not relative to a fixed datum) rather than absolute acceleration of the oscillator.

Pseudoacceleration response ($PSA(T,z)$). $PSA(T,z)$ is defined as $S_d(T,z) \cdot \omega^2$, where ω is angular frequency, $2 \cdot \pi / T$. Some authors prefer to use $PSA(T,z)$ rather than $S_d(T,z)$, but for values of z less than about 20%, the two measures are virtually identical.

Modified Mercalli Intensity (MMI) and European Macroseismic Scale (EMS). These are macroseismic intensity measures, meaning that they measure seismic excitation over a large area, not at a particular point on the ground. They are measured with an integer scale in Roman numerals from I to XII. They measure whether and how people in a region such as a neighborhood or city felt and reacted to earthquake motion (did they run outside?) and what they observed to happen to the ground, buildings, and contents around them, such as plates rattling and weak masonry being damaged. They are subjective and generally easier for nontechnical audiences to understand than instrumental measures. On the MMI scale, building damage begins around MMI VI and it is rare for an earthquake to produce shaking of $MMI \geq X$. EMS is similar to MMI, but building-damage observations are related to common European building types. A version of EMS defined in 1998 is often referred to as EMS-98. For detail see Table 3, http://en.wikipedia.org/wiki/Modified_Mercalli_intensity, and http://en.wikipedia.org/wiki/European_Macroseismic_Scale.

Table 3. MMI and EMS-98 macroseismic intensity scales (abridged)

MMI	Brief description	EMS-98	Brief description
I. Instrumental	Generally not felt by people unless in favorable conditions.	I. Not felt	Not felt by anyone.
II. Weak	Felt only by a couple people that are sensitive, especially on the upper floors of buildings. Delicately suspended objects (including chandeliers) may swing slightly.	II. Scarcely felt	Vibration is felt only by individual people at rest in houses, especially on upper floors of buildings.
III. Slight	Felt quite noticeably by people indoors, especially on the upper floors of buildings. Standing automobiles may rock slightly. Vibration similar to the passing of a truck. Indoor objects may shake.	III. Weak	The vibration is weak and is felt indoors by a few people. People at rest feel swaying or light trembling. Noticeable shaking of many objects.
IV. Moderate	Felt indoors by many people, outdoors by few. Some awakened. Dishes, windows, and doors disturbed, and walls make cracking sounds. Chandeliers and indoor objects shake noticeably. Like a heavy truck striking building. Standing automobiles rock. Dishes and windows rattle.	IV. Largely observed	The earthquake is felt indoors by many people, outdoors by few. A few people are awakened. The level of vibration is possibly frightening. Windows, doors and dishes rattle. Hanging objects swing. No damage to buildings.
V. Rather Strong	Felt inside by most or all, and outside. Dishes and windows may break. Vibrations like a train passing close. Possible slight damage to buildings. Liquids may spill out of glasses or open containers. None to a few people are frightened and run outdoors.	V. Strong	Felt indoors by most, outdoors by many. Many sleeping people awake. A few run outdoors. China and glasses clatter. Top-heavy objects topple. Doors & windows swing.
VI. Strong	Felt by everyone; many frightened and run outdoors, walk unsteadily. Windows, dishes, glassware broken; books fall off shelves; some heavy furniture moved or overturned; a few instances of fallen plaster. Damage slight to moderate to poorly designed buildings, all others receive none to slight damage.	VI. Slightly damaging	Felt by everyone indoors and by many outdoors. Many people in buildings are frightened and run outdoors. Objects on walls fall. Slight damage to buildings; for example, fine cracks in plaster and small pieces of plaster fall.
VII. Very Strong	Difficult to stand. Furniture broken. Damage light in buildings of good design and construction; slight to moderate in ordinarily built structures; considerable damage in poorly built or badly designed structures; some chimneys broken or heavily damaged. Noticed by people driving automobiles.	VII. Damaging	Most people are frightened and run outdoors. Furniture is shifted and many objects fall from shelves. Many buildings suffer slight to moderate damage. Cracks in walls; partial collapse of chimneys.
VIII. Destructive	Damage slight in structures of good design, considerable in normal buildings with possible partial collapse. Damage great in poorly built structures. Brick buildings moderately to extremely heavily damaged. Possible fall of chimneys, monuments, walls, etc. Heavy furniture moved.	VIII. Heavily damaging	Furniture may be overturned. Many to most buildings suffer damage: chimneys fall; large cracks appear in walls and a few buildings may partially collapse. Can be noticed by people driving cars.
IX. Violent	General panic. Damage slight to heavy in well-designed structures. Well-designed structures thrown out of plumb. Damage moderate to great in substantial buildings, with a possible partial collapse. Some buildings may be shifted off foundations. Walls can collapse.	IX. Destructive	Monuments and columns fall or are twisted. Many ordinary buildings partially collapse and a few collapse completely. Windows shatter.
X. Intense	Many well-built structures destroyed, collapsed, or moderately damaged. Most other structures destroyed or off foundation. Large landslides.	X. Very destructive	Many buildings collapse. Cracks and landslides can be seen.
XI. Extreme	Few if any structures remain standing. Numerous landslides, cracks and deformation of the ground.	XI. Devastating	Most buildings collapse.
XII. Catastrophic	Total destruction. Objects thrown into the air. Landscape altered. Routes of rivers can change.	XII. Completely devastating	All structures are destroyed. The ground changes.

Japan Meteorological Agency seismic intensity scale (JMA). Like MMI, but a 0 to 7 scale. It has both a macroseismic sense (observed effects of people and objects) and an instrumental sense (in

terms of ranges of PGA). See http://en.wikipedia.org/wiki/Japan_Meteorological_Agency_seismic_intensity_scale for details.

Instrumental intensity measure (IMM). This is a positively valued measure of intensity that can take on fractional values, e.g., 6.4. This is an estimate of MMI using functions of instrumental ground-motion measures such as PGA and PGV.

4.3.2 Conversion between instrumental and macroseismic intensity

It is often desirable to convert between instrumental ground motion measures such as PGA or PGV and macroseismic intensity measures, especially MMI. One reason is that MMI observations can be made by people exposed to shaking or who make post-earthquake observations, and whereas instrumental measures require an instrument.

Ground-motion-to-intensity-conversion equations (GMICE). These estimate macroseismic intensity as a function of instrumental measures of ground motion. There are several leading GMICEs. When selecting among them, try to match the region, magnitude range, and distance range closest to the conditions where the GMICE will be applied. More data for conditions like the ones in question are generally better than less data, all other things being equal. When considering building response, GMICE that convert from $Sa(T,z)$ to macroseismic intensity are generally better than those that use PGA or PGV, which do not reflect anything building-specific. Two recent GMICE for the United States are as follows:

As of this writing, Worden et al.'s (2012) relationships in Equations (51) and (52) seem to be the best choice for estimating MMI from ground motion and vice versa for California earthquakes. Reason is they employ a very large dataset of California (ground motion, MMI) observations and they are conveniently bidirectional, meaning that one can rearrange the relationships to estimate instrumental measures in terms of MMI, as well as MMI in terms of instrumental measures. The dataset includes 2092 PGA-MMI observations and 2074 PGV-MMI observations from 1207 California earthquakes $M=3.0-7.3$, $MMI\ 2.0-8.6$, $R=4-500$ km. It includes no observations from continental interior. It includes regressions for $Sa(0.3\text{ sec}, 5\%)$, $Sa(1.0\text{ sec}, 5\%)$, $Sa(3.0\text{ sec}, 5\%)$, PGA, and PGV that operate in both directions,. The reason that the relationships are bidirectional is that Worden et al. (2012) used a total least squares data modeling technique in which observational errors on both dependent and independent variables are taken into account. Equation (52) includes the option to account for the apparent effects of magnitude M and distance R . The columns for residual standard deviations show a modest reduction in uncertainty when accounting for M and R .

$$\begin{aligned} MMI &= c_1 + c_2 \cdot \log_{10}(Y) & \log_{10}(Y) \leq t_1 \\ &= c_3 + c_4 \cdot \log_{10}(Y) & \log_{10}(Y) > t_1 \end{aligned} \quad (51)$$

$$\begin{aligned} MMI &= c_1 + c_2 \cdot \log_{10}(Y) + c_5 + c_6 \cdot \log_{10}(R) + c_7 \cdot M & MMI \leq t_2 \\ &= c_3 + c_4 \cdot \log_{10}(Y) + c_5 + c_6 \cdot \log_{10}(R) + c_7 \cdot M & MMI > t_2 \end{aligned} \quad (52)$$

Table 4. Parameter values for Worden et al. (2012) GMICE for California

Y	c ₁	c ₂	c ₃	c ₄	c ₅	c ₆	c ₇	t ₁	t ₂	Equation (51)		Equation (52)	
										σ _{MMI}	σ _{log10Y}	σ _{MMI}	σ _{log10Y}
PGA	1.78	1.55	- 1.60	3.7	- 0.91	1.02	- 0.17	1.57	4.22	0.73	0.39	0.66	0.35
PGV	3.78	1.47	2.89	3.16	0.90	0.00	- 0.18	0.53	4.56	0.65	0.40	0.63	0.38
PSA(0.3 sec)	1.26	1.69	- 4.15	4.14	- 1.05	0.60	0.00	2.21	4.99	0.84	0.46	0.82	0.44
PSA(1.0 sec)	2.50	1.51	0.20	2.90	2.27	- 0.49	- 0.29	1.65	4.98	0.80	0.51	0.75	0.47
PSA(3.0 sec)	3.81	1.17	1.99	3.01	1.91	- 0.57	- 0.21	0.99	4.96	0.95	0.69	0.89	0.64

Units of Y are cm/sec² or cm/sec, 5% damping. Units of R are km. Columns labeled σ show residual standard deviation and depend on whether the M and R adjustment is used or not. Use σ_{log10Y} with rearranged equations to give log₁₀Y in terms of MMI.

Rearranging Equation (51) to express PGA in terms of MMI and changing units to multiples of gravity produces the results shown in Table 5.

Table 5. Approximate relationship between PGA and MMI using Worden et al. (2012)

MMI	VI	VII	VIII	IX	X	XI	XII
PGA (g)	0.12	0.22	0.40	0.75	1.39	2.59	4.83

Atkinson and Kaka's (2007) relationships, shown in Equations (53) and (54), employ smaller dataset of California observations than Worden et al. (2012), but they reflect data from central and eastern and US observations. There are 986 observations: 710 from 21 California earthquakes, M=3.5-7.1, R=4-445 km, MMI=II-IX, and 276 Central and eastern US observations from 29 earthquakes M=1.8-4.6 R=18-799 km. They include regression for Sa(0.3 sec, 5%), Sa(1.0 sec, 5%), Sa(3.0 sec, 5%), PGA, and PGV. Equation (54) accounts for the apparent effects of magnitude M and distance R. As suggested by the difference between the columns for residual standard deviation, the information added by M and R only modestly reduces uncertainty. The Atkinson and Kaka (2007) relationships are not bidirectional, meaning that one cannot rearrange them to estimate ground motion as a function of MMI.

$$\begin{aligned}
 MMI &= c_1 + c_2 \log_{10}(Y) & MMI \leq 5 \\
 &= c_3 + c_4 \cdot \log_{10}(Y) & MMI > 5
 \end{aligned}
 \tag{53}$$

$$\begin{aligned}
 MMI &= c_1 + c_2 \cdot \log_{10}(Y) + c_5 + c_6 \cdot M + c_7 \cdot \log_{10}(R) & MMI \leq 5 \\
 &= c_3 + c_4 \cdot \log_{10}(Y) + c_5 + c_6 \cdot M + c_7 \cdot \log_{10}(R) & MMI > 5
 \end{aligned}
 \tag{54}$$

Table 6. Parameter values for Atkinson and Kaka (2007) GMICE for the United States

Y	C ₁	C ₂	C ₃	C ₄	C ₅	C ₆	C ₇	σ_{MMI}	
								Eqn (53)	Eqn (54)
PGA	4.37	1.32	3.54	3.03	0.47	-0.19	0.26	0.80	0.76
PGV	2.65	1.39	-1.91	4.09	-1.96	0.02	0.98	1.01	0.89
PSA(0.3 sec)	2.40	1.36	-1.83	3.56	-0.11	-0.20	0.64	0.88	0.79
PSA(1.0 sec)	3.23	1.18	0.57	2.95	1.92	-0.39	0.04	0.84	0.73
PSA(2.0 sec)	3.72	1.29	1.99	3.00	2.24	-0.33	-0.31	0.86	0.72

Units of Y are cm/sec² or cm/sec, 5% damping. Units of R are km. Columns labeled σ show residual standard deviation and depend on whether the M and R adjustment is used or not.

Other GMICE of potential interest include the following. Wald et al.'s (1999) relationship draws on 342 (PGA, PGV, MMI) observations from 8 California earthquakes. Kaestli and Faeh (2006) offer a PGA-PGV-MMI relationship for Switzerland, Italy, and France. Tselentis and Danciu (2008) offer relationships for MMI as functions of PGA, PGV, Arias intensity, cumulative absolute velocity, magnitude, distance, and soil conditions for Greece. Kaka and Atkinson (2004) offer GMICE relating MMI to PGV and 3 periods of PSA for eastern North America. Sørensen et al. (2007) offer a GMICE relating EMS-98 to PGA and PGV for Vrancea, Romania.

For relationships that give ground motion as a function of MMI (intensity-to-ground-motion-conversion equations, IGMCE), consider Faenza and Michelini (2010) for Italy, Murphy and O'Brien (1977) for anywhere in the world, and Trifunac and Brady (1975) for the western United States. Unless explicitly stated, GMICE and IGMCE relationships are not interchangeable—it is inappropriate to simply rearrange terms of a GMICE to produce an IGMCE. Reason is that both GMICE and IGMCE are derived by regression analysis. Given (x,y) data, a least-squares regression of y as a function of x will generally produce a different curve than a least-squares regression of x as a function of y.

4.3.3 Some commonly used measures of component excitation

The demand parameter for building components' fragility functions are commonly (but not always) measured in terms of one of the following.

Peak floor acceleration (PFA). Like PGA, except at the base of floor-mounted components or at the soffit of the slab from which a component is suspended, rather than the ground.

Peak floor velocity (PFV). Like PGV, except at the base of the floor-mounted components or at the soffit of the slab from which a component is suspended, rather than the ground.

Peak transient interstory drift ratio (PTD). This is the maximum value at any time during seismic excitation of the displacement of the floor above relative to the floor below the story on which a component is installed, divided by the height difference of the two stories. The displacements are commonly measured parallel to the axis of the component, such as along a column line.

Peak residual drift ratio (PRD). Like PTD, except measures the displacement of the floor above relative to the floor below after the cessation of motion.

4.4 Hazard deaggregation

When evaluating the risk to an asset, it is often desirable to perform nonlinear dynamic structural analyses at one or more intensity measure levels. To do so, one needs a suite of ground motion time histories scaled to the desired intensity. The ground motion time histories should be consistent with the seismic environment. That is, they should reflect the earthquake magnitudes m and distances r that would likely cause that level of excitation in that particular place. The reason is that magnitude and distance affect the duration and frequency content of the ground-motion time history, which in turn affects structural response.

There is another term (commonly denoted by ε) that also matters. It relates to how the spectral acceleration response at a specified period in a particular ground motion time history differs from its expected value, given magnitude and distance. Let y denote the natural logarithm of the intensity measure level, e.g., the natural logarithm of the spectral acceleration response at the building's estimated small-amplitude fundamental period of vibration. Let μ and σ denote the expected value and standard deviation of the natural logarithm of the intensity measure level, respectively, calculated from a ground-motion-prediction equation. The ε term is a normalized value of y , as follows:

$$\varepsilon = \frac{y - \mu}{\sigma} \quad (55)$$

When calculating the motion y_0 that has a specified exceedance probability p_0 , one labels the ε from a specific source and this particular value of motion y_0 as ε_0 . The equation is the same as Equation (55), except with the subscript 0 on y and ε . It is practical to calculate for a given location, intensity measure type, and intensity measure level, the contribution of each fault segment, magnitude, rupture location, and value of ε_0 to the frequency with which the site is expected to experience ground motion of at least the specified intensity measure level. In fact, Equation (48) shows that the site hazard is summed from such values. (For simplicity that equation omits mention of ε , but the extension is modest.)

Rather than leading the reader through the math, suffice it to say that there are online tools to do that hazard deaggregation, and an example is given here. The USGS offers a website that does interactive hazard deaggregation for the United States. As of this writing, the URL includes the year associated with the hazard model, so it will change over time. The most recent tool at this writing is <https://geohazards.usgs.gov/deaggint/2008/>. When that site becomes obsolete the reader should be able to find the current one by Googling “interactive hazard deaggregation USGS.”

Consider an imaginary 12-story building in San Diego, California at 1126 Pacific Hwy, San Diego CA, whose geographic coordinates are 32.7166 N -117.1713 E (North America has negative east longitude). Suppose its small-amplitude fundamental period of vibration is 1.0 sec, its V_{s30} is 325 m/sec, and its depth to bedrock (defined as having a shearwave velocity of 2500 m/sec) is 1.0 km. One wishes to select several ground motion time histories with geometric-mean $S_a(1.0 \text{ sec}, 5\%)$ equal to that of the motion with 10% exceedance probability in 50 years. The input data look like Figure 18. The results look like Figure 19, which shows that 10%/50-year motion at this site tends to result from earthquakes with Mw 6.6 at 1.8 km distance and a value of $\varepsilon_0 = -1.22$. One can then

draw sample ground motion time histories with approximately these values of magnitude, distance, and ϵ_0 from a database such as PEER's strong motion database, currently located at http://peer.berkeley.edu/peer_ground_motion_database.

2008 Interactive Deaggregations

This is a preliminary version of the 2008 NSHMP PSHA Interactive Deaggregation web site. In this initial release, the 2008-update source and attenuation models of the NSHMP (Petersen and others, 2008) are used with just one exception. For the New Madrid Seismic Zone (NMSZ), the deaggregation source model is set up for the "unclustered" event branches only. These unclustered New Madrid sources are given full weight (90% weight to the 500 year mean recurrence models; 10% weight to the 1000-year mean recurrence models) whereas in the 2008 NSHMP PSHA they are only given 50% weight. Clustered-source models receive the other 50% weight in 2008 NSHMP PSHA. This is a temporary difference. The interactive deaggregation will include the NMSZ clustered-source models when a few software checkups are completed.

Seismic-hazard deaggregations are available for the following spectral periods anywhere in the conterminous U.S.: 0.0 s (PGA), 0.1 s, 0.2 s, 0.3 s, 0.5 s, 1.0 s, and 2.0 s. This is the same set of periods that has been available at the USGS interactive deaggregation web sites since 1996 (for sites in the conterminous United States).

In the western US, long-period seismic-hazard deaggregations at 3.0 s, 4.0 s, and 5.0 s are also available at this web site. [More...](#)

FAQ Documentation 1996 Update 2002 Update Feedback

Site Name
[Enter address instead](#)

Latitude Longitude

Exceedance Probability in

Spectral Period

V_{s30} (m/s) [What values can I use at various locations?](#)

Run GMPE Deaggs? ☒ Yes ☐ No [What's this?](#)

Additional Output ☒ Geographic Deagg [What's this?](#) ☐ Conditional Mean Spectra ☐ None

[\(Show Map\)](#)

San Diego test site [\[TXT | PDF | GIF | GeoPDF | GeoGIF \]](#)

32.72°N 117.17°W – 10% in 50 years. 1Hz (1.0 Seconds) V_{s30} 325.0 m/s

Compute

Porter (24 Oct 2013) S....gif [Show all downloads...](#)

Figure 18. USGS interactive hazard deaggregation website

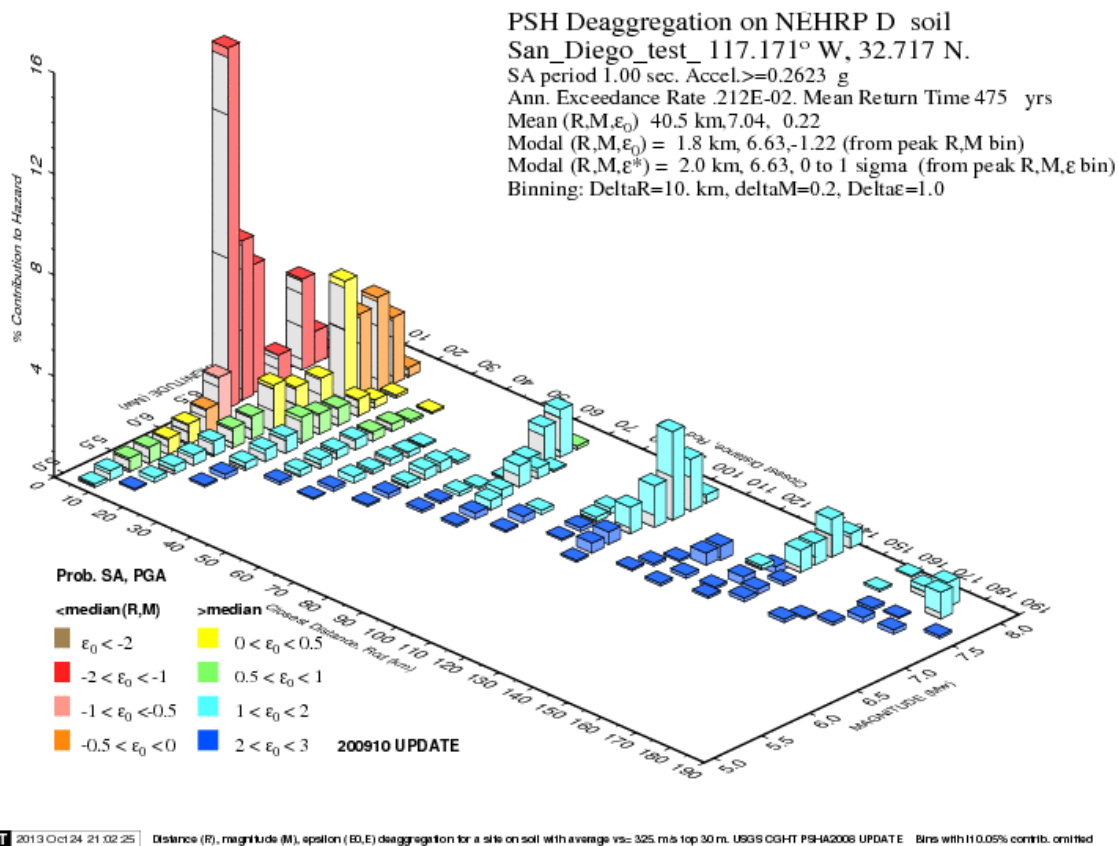


Figure 19. Sample output of the USGS' interactive hazard deaggregation website

4.5 Convenient sources of hazard data

For California sites, see www.OpenSHA.org/apps for a very powerful local hazard curve calculator. For all US locations, the USGS distributes a database of seismic hazard on a 0.05-degree grid. For example, see <http://earthquake.usgs.gov/hazards/products/> for several sets of gridded hazard data from the National Seismic Hazard Mapping Program. For example, for the 2008 NSHMP hazard curves for $S_a(1.0 \text{ sec}, 5\%)$, see <http://earthquake.usgs.gov/hazards/products/conterminous/2008/data/> and look for the data file labeled "Hazard curve data 1 Hz (1.0 sec). If you use NHSMP's hazard curves (as opposed to uniform seismic hazard maps), the data will reflect hazard on site class B, so adjust for other site classes. A good way to do that is by multiplying by the site coefficient F_A (for the 3.33 Hz or 5Hz curves) or F_V (for the 1Hz curves) from ASCE 7-05 tables 11.4-1 and 11.4-2, respectively. You will also find at the same location gridded uniform seismic hazard data such as the values of $S_a(1.0 \text{ sec}, 5\%)$ with 2% exceedance probability in 50 years (the so-called MCE_G map). For that map, see the data file labeled "Gridded Hazard Map 1 Hz (1.0 sec) 2% in 50 Years" at <http://earthquake.usgs.gov/hazards/products/conterminous/2008/data/>.

For elsewhere in the world, see www.globalquakemodel.org. the Global Earthquake Model's hazard software is in the process of becoming available as of this writing.

Ground motion records can be acquired from PEER's NGA West 2 strong-motion database at <http://ngawest2.berkeley.edu/>.

5. Risk for a single asset

5.1 Risk

This work has dealt so far with fragility, vulnerability, and seismic hazard. Risk is analogous to hazard, but as used here it refers to the relationship between probability or frequency of the undesirable outcome and a measure of the degree of that undesirable outcome. The calculation of risk involves the following input quantities:

- Exposure: a definition of the assets exposed to loss. The asset definition includes locations, values exposed to loss, and the characteristics necessary to estimate vulnerability.
- Hazard: the frequency with which various levels of environmental excitation are exceeded, e.g., the frequency with which each asset experiences various levels of 1-sec, 5%-damped, median-component spectral acceleration response, zero to some maximum considered level.
- Damageability, either in the form of fragility (probability of exceeding specified limit states as a function of environmental excitation) or vulnerability (at a minimum, the expected value of loss as a function of environmental excitation, and ideally the conditional distribution of loss, condition on each of many levels of environmental excitation).

If there are only two possible values of that undesirable outcome—it occurs or it doesn't occur—one can apply the theorem of total probability, combining fragility and hazard, to estimate the mean frequency with which it occurs or the probability that it will occur in a specified period of time. If the undesirable outcome is measured in terms of loss, then one can apply the theorem of total probability, combining vulnerability and hazard, to estimate the mean annualized loss or the probability that at least a specified degree of loss will occur in a specified period of time.

5.2 Expected failure rate for a single asset

Let us begin with a simple measure of risk: the mean rate λ (number per unit time) with which an undesirable outcome occurs. Let $F(s)$ denote a fragility function for the undesirable outcome whose independent variable is shaking severity s for an asset with a single damage state. Let $G(s)$ denote the mean rate of shaking $S \geq s$ (mean number of occurrence per year in which the shaking is at least s at the site of interest). The mean rate of failures (number of times per year that the component reaches or exceeds the specified damage state) is given by

$$\lambda = \int_{s=0}^{\infty} -F(s) \frac{dG(s)}{ds} ds \quad (56)$$

where $G(s)$ = mean annual frequency of shaking exceeding intensity s . Understand the equation this way: $G(s)$ is the mean number of earthquakes per year producing shaking of s or greater. Therefore $-dG(s)/ds$ is the mean number of earthquakes per year producing shaking of exactly s . The negative sign is required because $G(s)$ slopes down to the right (lower frequency of higher shaking) at all values of s . $F(s)$ is the probability that the failure will occur given shaking s , so the integrand is the mean number of earthquakes per year that cause shaking s and result in failure. We integrate over all values of s , because we want to account for failures at any value of s . Figure 20 illustrates with a sample hazard curve $G(s)$ and fragility function $F(s)$. The figure also includes a loglinear approximation for $G(s)$ and mentioned two design parameters, MCE_R and MCE_G , discussed elsewhere.

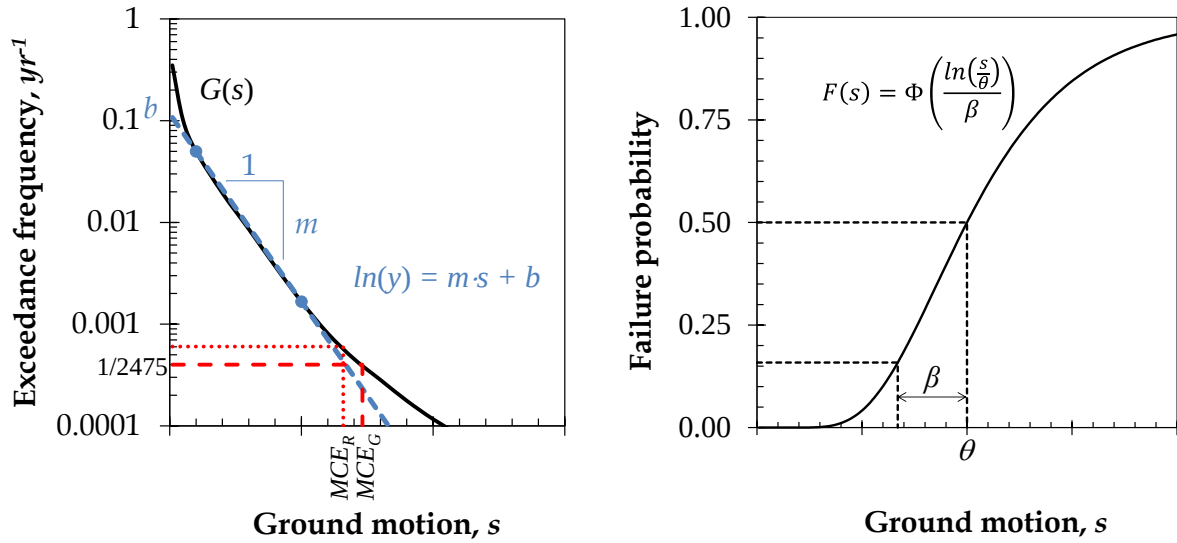


Figure 20. Calculating failure rate with hazard curve (left) and fragility function (right)

One can also use integration by parts and show that

$$\lambda = \int_{s=0}^{\infty} \frac{dF(s)}{ds} G(s) ds \quad (57)$$

If for example $F(s)$ is taken as a cumulate lognormal distribution function, $dF(s)/ds$ is the lognormal probability density function, denoted here by $\phi(s)$, i.e.,

$$F(s) = \Phi\left(\frac{\ln(s/\theta)}{\beta}\right) \quad (58)$$

$$\frac{dF(s)}{ds} = \phi\left(\frac{\ln(s/\theta)}{\beta}\right)$$

Equation (56) is only rarely solvable in closed form. More commonly, $G(s)$ is available only at discrete values of s . If one has $n+1$ values of s , at which both $F(s)$ and $G(s)$ are available, and these are denoted by s_i , F_i , and G_i : $i = 0, 1, 2, \dots, n$, respectively, then EAL in Equation (56) can be replaced by:

$$\begin{aligned}\lambda &= \sum_{i=1}^n \left(F_{i-1} G_{i-1} (1 - \exp(m_i \Delta s_i)) - \frac{\Delta F_i}{\Delta s_i} G_{i-1} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right) \right) \\ &= \sum_{i=1}^n (F_{i-1} a_i - \Delta F_i b_i)\end{aligned}\quad (59)$$

where

$$\begin{aligned}\Delta s_i &= s_i - s_{i-1} & \Delta F_i &= F_i - F_{i-1} & m_i &= \ln(G_i/G_{i-1})/\Delta s_i \text{ for } i = 1, 2, \dots, n \\ a_i &= G_{i-1} (1 - \exp(m_i \Delta s_i)) & b_i &= \frac{G_{i-1}}{\Delta s_i} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right)\end{aligned}$$

5.3 Probability of failure during a specified period of time

If one assumes that hazard and fragility are memoryless and do not vary over time, then failure is called a Poisson process, and the probability that failure will occur at least once in time t is given by

$$P_f = 1 - \exp(-\lambda \cdot t) \quad (60)$$

where λ is the expected value of failure rate, calculated for example using Equation (59).

5.4 Expected annualized loss for a single asset

Now consider risk in terms of degree of loss to a single asset. There are many risk measures in common use. First consider the expected annualized loss (*EAL*). It is analogous to mean rate of failures as calculated in Equation (56). If loss is measured in terms of repair cost, *EAL* is the average quantity that would be spent to repair the building every year. It can be calculated as

$$EAL = V \int_0^\infty y(s) \frac{-dG(s)}{ds} ds \quad (61)$$

where V refers to the replacement value of the asset and $y(s)$ is the expected value of loss given shaking s as a fraction of V . Equation (61) is only rarely solvable in closed form. More commonly, $y(s)$ and $G(s)$ are available at discrete values of s . If one has $n+1$ values of s , at which both $y(s)$ and $G(s)$ are available, and these are denoted by s_i , y_i , and G_i : $i = 0, 1, 2, \dots, n$, respectively, then *EAL* in Equation (61) can be replaced by:

$$\begin{aligned}EAL &= V \sum_{i=1}^n \left(y_{i-1} G_{i-1} (1 - \exp(m_i \Delta s_i)) - \frac{\Delta y_i}{\Delta s_i} G_{i-1} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right) \right) \\ &= V \sum_{i=1}^n (y_{i-1} a_i - \Delta y_i b_i)\end{aligned}\quad (62)$$

where

$$\Delta s_i = s_i - s_{i-1} \quad \Delta y_i = y_i - y_{i-1} \quad m_i = \ln(G_i/G_{i-1})/\Delta s_i \text{ for } i = 1, 2, \dots, n$$

$$a_i = G_{i-1} \left(1 - \exp(m_i \Delta s_i) \right) \quad b_i = \frac{G_{i-1}}{\Delta s_i} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right)$$

Note that repair cost or other property loss is not the only measure of loss and need not be the only contributor to *EAL*. One can include in *EAL* any or all of: direct and indirect business interruption costs; the value of avoided statistical deaths and injuries; the value of avoided cultural, historical, or environmental losses; the value of reputation loss; the value of avoided harm to mental health; and perhaps others. See MMC (2005) for means to quantify many of these other measures of loss.

5.5 One measure of benefit: expected present value of reduced *EAL*

One can measure the benefit of risk mitigation several ways. One common measure is the expected present value of the reduction in future *EAL*. Let *B* denote the expected present value of economic benefit of a mitigation measure. It can be calculated from the present value of the difference between the expected annualized loss before and after mitigation:

$$\begin{aligned} B &= (EAL - EAL_m) \left(\frac{1 - e^{-\rho t}}{\rho} \right) \\ &= \left(V \int_0^\infty y(s) |G'(s)| ds - V_m \int_0^\infty y_m(s) |G'_m(s)| ds \right) \left(\frac{1 - e^{-\rho t}}{\rho} \right) \end{aligned} \quad (63)$$

where *EAL* denotes the expected annualized loss; *V* refers to the replacement cost of the asset, ρ and *t* denote the real discount rate and planning period, respectively, *y*(*s*) refers to the mean seismic vulnerability function, i.e., the mean loss as a fraction of its replacement cost, given shaking intensity *s*, *G*(*s*) refers to the hazard function, i.e., the mean annual frequency of shaking exceeding intensity *s*, and *G'*(*s*) refers to its first derivative with respect to *s*. The subscript *m* indicates these values after mitigation. Since the mitigation could change the hazard (e.g., changing the fundamental period of vibration of the structure), *G_m*(*s*) may differ from *G*(*s*). The planning period is the length of time over which the analyst believes the mitigation is effective; a reasonable range of values for *t* for an ordinary building in the US might be 50 to 100 years.

In most practical circumstances, *y*(*s*) and *G*(*s*) are available only at discrete values of *s*. If we have *n*+1 values of *s*, at which both *y*(*s*) and *G*(*s*) are available, and we denote these values by *s_i*, *y_i*, and *G_i*: *i* = 0, 1, 2, ... *n*, respectively, then *EAL* in Equation (63) can be calculated as shown in Equation (62).

Note that equation (63) is not the only way, the right way, the best way to measure the value of mitigation. Because value is usually a subjective measure, it is valid to prefer to think about the benefit of mitigation in other terms, such as the reduction in loss in a worst-case or other extreme scenario. A self-selected committee of volunteers directed the San Francisco Community Action Plan for Seismic Safety, for example, to measure benefit in terms of the expected reduction in the number of collapsed buildings, red-tagged buildings, and yellow-tagged buildings in four particular earthquake scenarios, with an emphasis on one in particular. See for example Porter and Cobeen (2012) for more details.

Note also that the discount rate in Equation (63) might differ between measures of loss. Some writers find the discounting of human life (as in the reduction deaths and injuries) untenable, and apply a different discount rate to financial outcomes than to deaths and injuries.

5.6 Risk curve for a single asset

5.6.1 Risk curve for a lognormally distributed loss measure

It is often desirable to know the probability that loss will exceed a particular value during a given time period t as a function of loss. Another, very similar question with a nearly identical answer is the frequency (in event per unit time) that loss will exceed a particular value. Here, both relationships are expressed with a function called a risk curve. It is like the hazard curve, except that the x -axis measures loss instead of environment excitation. Figure 21 illustrates two risk curves. They could both express risk to the same asset using two different models, one with less and one with more uncertainty.

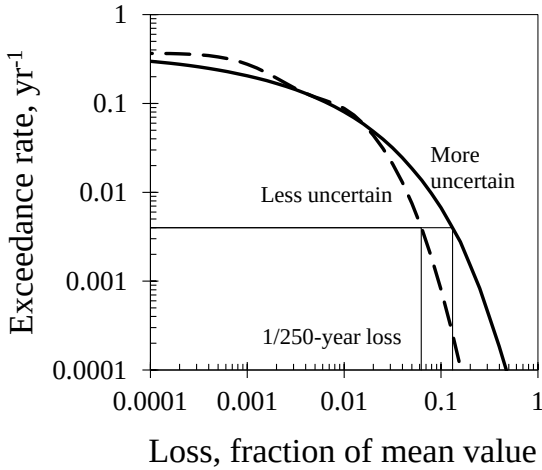


Figure 21. Two illustrative risk curves

How to calculate the risk curve? Suppose one knows the hazard curve and the uncertain vulnerability function for a single asset. The risk curve for a single asset can be calculated as

$$R(x) = \int_{s=0}^{\infty} -\left(1 - P[X \leq x | S = s]\right) \frac{dG(s)}{ds} ds \quad (64)$$

where

X = uncertain degree of loss to an asset, such as the uncertain damage factor

x = a particular value of X

s = a particular value of the environmental excitation, such as the shaking intensity in terms of the 5% damped spectral acceleration response at some index period of vibration

$R(x)$ = annual frequency with which loss of degree x is exceeded

$G(s)$ = the mean annual frequency of shaking exceeding intensity s

$P[X \leq x | S = s]$ = cumulative distribution function of X evaluated at x , given shaking s . If X is lognormally distributed at $S = s$, then

$$P[X \leq x | S = s] = \Phi\left(\frac{\ln(x/\theta(s))}{\beta(s)}\right) \quad (65)$$

where

$\theta(s)$ = median vulnerability function, i.e., the value of the damage factor with 50% exceedance probability when the asset is exposed to excitation s

$v(s)$ = coefficient of variation of vulnerability, i.e., the coefficient of variation of the damage factor of the asset exposed to excitation s

$\beta(s)$ = logarithmic standard deviation of the vulnerability function, i.e., the standard deviation of the natural logarithm of the damage factor when the asset is exposed to excitation s

If one has the mean vulnerability function $y(s)$ and coefficient of variation of loss as a function of shaking $v(s)$, use Equations (14) and (15) to evaluate $\theta(s)$ and $\beta(s)$.

Suppose the analyst has $p(s)$, $v(s)$, and $G(s)$ at a number n of discrete values of s , denoted here by s_i , where i is an index $i \in \{1, 2, \dots, n\}$. One can numerically integrate Equation (64) by

$$\begin{aligned} R(x) &= \sum_{i=1}^n \left(p_{i-1}(x) G_{i-1} (1 - \exp(m_i \Delta s_i)) - \frac{\Delta p_i(x)}{\Delta s_i} G_{i-1} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right) \right) \\ &= \sum_{i=1}^n (p_{i-1}(x) \cdot a_i - \Delta p_i(x) \cdot b_i) \end{aligned} \quad (66)$$

where

$$p_i(x) = P[X \geq x | S = s_i] = 1 - \Phi\left(\frac{\ln(x/\theta(s_i))}{\beta(s_i)}\right) \quad (67)$$

$$\Delta p_i(x) = p_i(x) - p_{i-1}(x) \quad (68)$$

$$\Delta s_i = s_i - s_{i-1}$$

$$m_i = \ln(G_i/G_{i-1})/\Delta s_i \text{ for } i = 1, 2, \dots, n$$

$$a_i = G_{i-1} (1 - \exp(m_i \Delta s_i)) \quad b_i = \frac{G_{i-1}}{\Delta s_i} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right)$$

Equation (66) is exact if $p(x)$ and $\ln G(s)$ vary linearly between values of s_i .

5.6.2 Risk curve for a binomially distributed loss measure

Another situation where one might use a risk curve: a particular facility has N similar assets, each of which can exceed a specified limit state with a probability that varies with shaking. The loss measure is how many of the assets exceed the limit state. One might want to calculate the frequency with which y assets exceed the limit state in a single event during a period t , or similarly the probability that, during some period of t years, at least y assets exceed the limit state in a single event. For example, the assets might be occupants and the limit state, injuries of at least some specified severity.

For clarity, let us proceed by discussing the example of injuries in a building. The math presented here is generally applicable to other assets and limit states, such as the number of identical components that overturn in a single event.

Let $E[Y|S=s]$ denote the expected value of the number of injuries at some level of ground motion s . If we have a value of $E[Y|S=s]$ for each of many levels of s , we refer to the set of pairs $\{(s, E[Y|S=s])\}$ as the mean vulnerability function. One can then estimate that the probability $f(s)$ that any individual person would be injured given ground motion s using Equation (69):

$$f(s) = \frac{E[Y|S=s]}{N} \quad (69)$$

If we assume that injuries are not correlated, that is, that the probability of injury to person A is unaffected by whether person B is injured, and that both people have the same injury probability at shaking s , then one can take the uncertain number of injuries Y as distributed like the binomial distribution. The probability that at least y people are injured is then given by Equation (70):

$$P[Y \geq y | S = s] = \sum_{m=y}^N \left[{}_N C_m \cdot f(s)^m \cdot (1-f(s))^{(N-m)} \right] \quad (70)$$

Where ${}_N C_m$ denotes the number of combinations of m elements out of N , i.e., N choose m :

$${}_N C_m = \frac{N!}{m!(N-m)!} \quad (71)$$

Let $G(s)$ denote the hazard function, i.e., the frequency (measured in events per year) with which shaking of at least s occurs. Then the occurrence rate of events injuring at least y people is given by Equation (72), which is a slight extension of the theorem of total probability. Here $R[Y \geq y | 1 \text{ yr}]$ denotes the rate (events per year) of at least y injuries, or $R(y)$ for shorthand:

$$\begin{aligned} R(y) &= R[Y \geq y | 1 \text{ yr}] \\ &= \int_{s=0}^{\infty} P[Y \geq y | S = s] \left| \frac{dG(s)}{ds} \right| ds \\ &= \int_{s=0}^{\infty} -P[Y \geq y | S = s] \frac{dG(s)}{ds} ds \end{aligned} \quad (72)$$

$$\begin{aligned} R(y) &= \sum_{i=1}^n \left(p_{i-1}(y) G_{i-1} (1 - \exp(-m_i \Delta s_i)) - \frac{\Delta p_i(y)}{\Delta s_i} G_{i-1} \left(\exp(-m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right) \right) \\ &= \sum_{i=1}^n (p_{i-1}(y) \cdot a_i - \Delta p_i(y) \cdot b_i) \end{aligned} \quad (73)$$

where

$$p_i(y) = P[Y \geq y | S = s_i] = \sum_{m=y}^N \left[{}_N C_m \cdot p(s_i)^m \cdot (1-p(s_i))^{(N-m)} \right] \quad (74)$$

$$\Delta p_i(y) = p_i(y) - p_{i-1}(y) \quad (75)$$

$$\Delta s_i = s_i - s_{i-1} \quad m_i = \ln(G_i/G_{i-1})/\Delta s_i \text{ for } i = 1, 2, \dots, n$$

$$a_i = G_{i-1} (1 - \exp(m_i \Delta s_i)) \quad b_i = \frac{G_{i-1}}{\Delta s_i} \left(\exp(m_i \Delta s_i) \left(\Delta s_i - \frac{1}{m_i} \right) + \frac{1}{m_i} \right)$$

If we idealize earthquake occurrence as a Poisson process, i.e., as a memoryless process, then the probability that at least y injuries occur in time t years is given by the Poisson cumulative distribution function:

$$P[Y \geq y | t] = 1 - \exp(-R(y) \cdot t) \quad (76)$$

5.6.3 Risk curve for a binomially distributed loss measure with large N

Equation (70) can be hard to calculate for large N , e.g., when there are a large number of building occupants, because of the $N!$ term in the numerator of Equation (71). However, when N becomes large, the binomial resembles the Gaussian distribution with expected value and variance given by

$$E[Y | S = s] = N \cdot f(s) \quad (77)$$

$$\text{Var}[Y | S = s] = N \cdot f(s) \cdot (1 - f(s)) \quad (78)$$

Then instead of calculating $p_i(y)$ using Equation (74), use

$$p_i(y) = P[Y \geq y | S = s_i] = 1 - \Phi \left(\frac{y - N \cdot f(s_i)}{\sqrt{N \cdot f(s_i) \cdot (1 - f(s_i))}} \right) \quad (79)$$

5.7 Probable maximum loss for a single asset

There is no universally accepted definition of probable maximum loss (*PML*) for purposes of earthquake risk analysis, but it is often understood to mean the loss with 90% nonexceedance probability given shaking with 10% exceedance probability in 50 years. Under this definition, *PML* is more accurately called a measure of vulnerability rather than one of risk. For a single asset, *PML* can be calculated from the seismic vulnerability function by inverting the conditional distribution of loss at 0.90, when conditioned on shaking with 10% exceedance probability in 50 years.

For example, assume that loss is lognormally distributed conditioned on shaking s , with median $\theta(s)$ and logarithmic standard deviation $\beta(s)$ as described near Equation (65), which are related to the mean vulnerability function $y(s)$ and coefficient of variation $v(s)$ as in Equations (14) and (15). Under the assumption of Poisson arrivals of earthquakes, shaking with 10% exceedance probability in 50 years is the shaking with exceedance rate $G(s_{PML}) = 0.00211$ per year, so *PML* can be estimated as a fraction of value exposed by

$$PML = \theta(s_{PML}) \cdot \exp(1.28 \cdot \beta(s_{PML})) \quad (80)$$

where $s_{PML} = G^{-1}(0.00211 \text{ yr}^{-1})$, that is, the hazard curve (events per year) inverted at 0.00211.

5.8 Common single-site risk software

The professional reader may be interested in software options to calculate single-site risk. Several developers have created useful software. In the US as of this writing, the most popular commercial

single-site earthquake risk tool is probably ST-RISK (<http://www.st-risk.com/>). Its developers describe it as “a software package used by insurance and mortgage due-diligence investigators and structural engineers to perform detailed earthquake risk analysis for individual buildings. These analyses and reports are used by mortgage brokers to make lending decisions, insurance brokers to rate assessments, and building owners to make seismic retrofit plans.” It essentially pairs a hazard model from the USGS with a proprietary vulnerability model. The user provides the building’s latitude, longitude, optionally Vs30, and a few attributes of the building such as age, structural system, height, and optionally more-detailed features as specified by ASCE 31-03 (ASCE 2003). The vulnerability model “uniquely blends insurance loss data with post earthquake observed loss obtained as part of engineering reconnaissance information to generate damage functions that most accurately reflect reported losses from earthquakes.” The user can alternatively use Hazus-based vulnerability functions. In either case, the vulnerability model probably relies substantially on expert opinion.

FEMA P-58 (ATC 2012) offers a much more labor-intensive but probably sounder empirical and analytical basis for estimating single-site risk in the form of its PACT software. The user must create a nonlinear structural model of the building in question, perform multiple nonlinear dynamic structural analyses of the building, add information about the structural and nonstructural components of the building, input hazard data, and the software calculates risk.

6. Portfolio risk analysis

This chapter is incomplete.

6.1 Overview of a portfolio catastrophe risk model

To estimate catastrophe risk to many assets, one typically performs what I refer to here as a portfolio catastrophe risk analysis. Here, a portfolio refers to a group of many assets. Portfolio catastrophe risk models generally characterize portfolio assets as samples of one or more classes, each sample having engineering attributes taken as independent and identically distributed. Portfolio models limit the need to gather information about the geometry and engineering characteristics of each asset or to perform geotechnical or structural analysis of each asset. A portfolio approach takes advantage of the law of large numbers to make reasonable estimates of aggregate losses to the portfolio, at the cost of greater uncertainty in the estimated losses to individual assets.

The alternative to a portfolio catastrophe risk modeler is sometimes referred to as a site-specific analysis, in which one gathers much more information about each asset and performs a geotechnical, structural, or second-generation performance-based earthquake engineering (PBEE-2) analysis of each asset, such as described by Porter (2003) and specified by FEMA P-58 (Applied Technology Council 2012).

Since at least the 1970s, portfolio catastrophe risk models have tended to employ the same elements, summarized in Figure 22. I first summarize the general steps of a portfolio catastrophe risk model and then provide detail later. For early examples of portfolio catastrophe risk models, see Wiggins et al. (1976) or Applied Technology Council (1985).

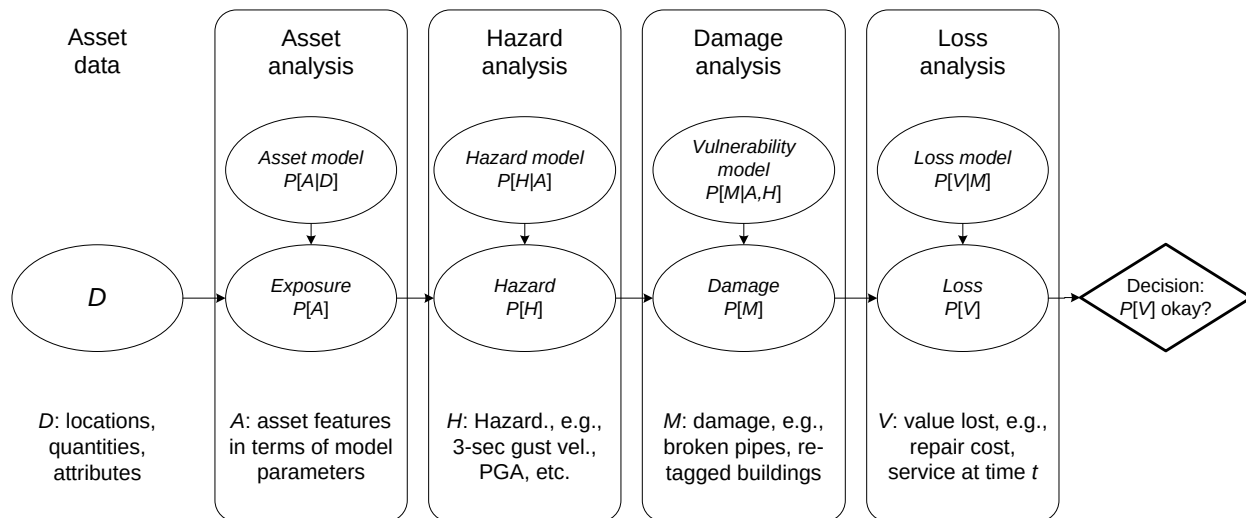


Figure 22. Common elements of a catastrophe risk model

Asset data and asset analysis. Catastrophe risk models generally start with a collection of available data about the assets at risk: their geographic locations, quantities exposed to loss (for example, the insurance limit of liability for buildings), and attributes (for example, the number of stories). Available data often appears in a format different from the parameters required by the model that will be employed, using different terminology or missing attributes that the model requires, so the modeler commonly must estimate the model parameters from the available data; let us refer to that process as an asset analysis. When the available data contain less information than the model requires, the modeler can perform a probabilistic asset analysis, estimating the probability distribution of model parameters conditioned on the input data.

Hazard analysis. Assets are exposed to uncertain environmental excitation, whether from future earthquake shaking, future tornado winds, or other natural or anthropogenic peril. One selects a hazard model. In the case of earthquake, the hazard model typically involves two elements: an earthquake rupture forecast, which comprises a mathematical model of the locations of seismic sources and the rate at which each source produces earthquakes of various magnitudes, and ground motion prediction equations, which estimate earthquake excitation at any location conditioned on the earthquake source characteristics (magnitude, distance, focal mechanism, etc.) and path and site characteristics (for example, average shearwave velocity in the upper 30 meters of soil and depth to bedrock with 2.5 km/sec shearwave velocity). The hazard model is applied to the asset locations to estimate the hazard at each asset, for example the probability distribution of peak ground velocity to which each asset is exposed conditioned on the occurrence of a particular earthquake.

Damage analysis. Damage is best, though not always, defined in terms of observable damage states—measures of the degradation of the asset defined unambiguously so that two observers, examining a damaged asset, both reach the same conclusions about its damage state without significant reliance on judgment or interpretation. One selects or develops a vulnerability model, which characterizes the (uncertain) physical damage to various classes of asset as a function of environmental excitation. One then applies the results of the hazard model to estimate the (typically uncertain) damage state of each asset.

Loss analysis. Loss is best, though not always, defined in terms of observable and unambiguous measures of loss that consumers of the analysis care about, usually financial consequences, safety impacts, and duration of loss of function (“dollars, deaths, and downtime”). One selects or creates a loss model that estimate value lost as a function of asset damage, applies the outputs of the damage analysis to the loss model, and estimates the (potentially uncertain) loss. Consumers of the analysis usually use the output of the loss analysis to make some risk-management decision, such as whether to accept the existing risk or how to transfer or remediate it.

6.2 Asset data and asset analysis

Portfolio risk analyses usually start by compiling the following attributes of about each asset in the portfolio:

- A unique identifier i . In the following discussion, let i denote the identifier. It sometimes appears below as a subscript on the other attributes to indicate, for example, location of asset i .
- Location o in terms of latitude and longitude, and occasionally elevation. Let o denote the vector location (ϕ, λ) , where ϕ denotes longitude in decimal degrees east of Greenwich, and λ denotes latitude in decimal degrees north of the equator.
- Site conditions s . In earthquake risk, usually parameterized in terms of ASCE 7's Vs30 (meaning the average shearwave velocity in the upper 30 meters of soil) and depth to bedrock (sometimes defined as soil with shearwave velocity of 1 km/sec, sometimes 2.5 km/sec). The site's proximity to a known active fault, its landslide susceptibility, and its liquefaction susceptibility are also relevant site conditions for earthquake risk. In wind risk, site conditions are usually parameterized in terms of ASCE 7's exposure category. Let s denote a vector of the relevant the site conditions. Site soil conditions are usually uncertain (especially Vs30, liquefaction potential, landslide potential), with the rare exception of sites for which the analyst has soil boring logs. Even in such cases, depth to ground water can fluctuate seasonally, which affects liquefaction susceptibility.
- Values exposed to loss V . If the loss measure of interest is repair cost, one needs to know the replacement cost new of the building and its contents. If one wants to know risk in terms of casualties, then number of occupants by time of day and day of week is the important value measure. If business interruption loss or additional living expenses are the important loss measure (collectively referred to as time-element loss), then one needs to know the economic loss associated with various durations of loss of function. If the loss measure of interest is whether the building will be habitable, then one needs to know how many people live or work there. Let V denote value exposed to loss. It is usually uncertain, even though many catastrophe risk models ignore that uncertainty.
- Asset category a , sometimes called structure type, construction type, building type, or model building type. There are many classification systems. The Hazus-MH taxonomy is commonly used. It identifies buildings by structural material, lateral force resisting system, height category, code era, and occupancy classification. See <http://goo.gl/XfdsjY> for details. The Global Earthquake Model (GEM) Building Taxonomy version 2 (<http://goo.gl/m6JVUL>) is almost infinitely flexible, allowing the user to classify buildings by any combination of 13 attributes, including those of the Hazus-MH taxonomy and several others. The commercial catastrophe risk models (e.g., RMS, AIR and EQECAT)

have their own proprietary taxonomies that do not always relate one-to-one. Some models refer to some attributes as modifiers that are used to adjust losses calculated for a broad category to account for the effect of the attribute, such as soft story conditions in an earthquake risk analysis. The modifiers are treated here as merely a further subdivision of the category system. Asset category is usually uncertain, with the rare exception of a portfolio whose asset categories have been established by a structural engineer examining structural drawings.

- Contract details c for contracts that transfer risk from the property owner, tenant, or other entity experiencing damage to a second party such as an insurer or the seller of a bond that acts like insurance. These risk-transfer contracts relate property repair costs, duration of loss of function, and casualties to the economic liability of the second party. Think of the contract details c as a mathematical function that takes as input the various repair costs, loss-of-function duration, and casualties, and the value of the function is the financial liability of the second party. The function usually has additional parameters, especially the deductible d (the repair cost that the insured must pay before the insurer's liability begins), limit of liability l (the maximum amount that the insurer must pay), and pro rata share p (the fraction of loss in excess of the deductible that the insurer must pay). There are various details about how d , l , and p apply. For example, in some contracts, there are separate deductibles for the building, contents, and time-element losses.

One can characterize a portfolio risk analysis as comprising the portfolio definition followed by three analytical stages: hazard analysis, engineering loss analysis, and financial loss analysis. The last stage only applies in the case of a contract that transfers risk. The term "hazard analysis" is fairly common, but the author is unaware of standard terminology for the loss analysis and financial analyses, so the reader should not assume that they are commonly understood.

TBD: a table summarizing parameters, indicating uncertainty.

6.3 Portfolio hazard analysis

TBD.

Why portfolio hazard is different from single site.

Earthquake rupture forecasts. How to select branch(es) and simulate sequence(s)

Ground motion prediction equation(s); how to select

Inter- and intra-event terms; how to simulate inter-event term

Spatial correlation in ground motion. How to simulate spatially correlated ground motion field.

Options for scenario shaking (foregoing or 3D), fault offset, liquefaction, landsliding.

Comparing median maps and 3D.

6.4 Portfolio loss analysis

TBD.

Usually some form of Monte Carlo simulation. Illustrated.

6.5 Decision making

TBD.

How to construct and read the risk curve, also known as portfolio loss exceedance curve. Important points on the risk curve. How treatment of uncertainty affects the shape of the risk curve.

.... Those decisions are sometimes informed by a portfolio loss exceedance curve, which expresses on an x-y chart the frequency with which loss to the portfolio exceeds various values. Loss appears on the x-axis and exceedance frequency (or sometimes 1-year exceedance probability) on the y-axis. Insurers and reinsurers are usually most interested in the loss with 1% or 0.4% annual exceedance probability, or almost equivalently, the 100-year or 250-year loss. They use these figures to ensure liquidity, that is, to ensure that they have sufficient reinsurance and capital reserves to survive a rare loss. They use the 100-year loss (or in some cases the 250-year loss) as a benchmark for a rare loss.

Some decision-makers want to know the expected value of loss or some upper fractile such as the 90th percentile of loss in a particular scenario event, such as a large earthquake. The large earthquake is a different proxy for the rare event, and the 90th percentile in that event is sometimes used as the definition of the probable maximum loss.

6.6 Common portfolio risk tools

TBD.

Early software tools. Whitman MIT series. Wiggins et al. (1976) software.

ATC-13

Commercial cat models

Hazus-MH and other catastrophe risk freeware (MIRISK, ...)

GEM

7. Some mathematical tools

7.1 Monte Carlo simulation

TBD

7.2 Moment matching



Figure 23. Monte Carlo simulation is very powerful and relatively simple, but can be computationally demanding and can converge slowly, meaning it can take a lot samples to get a reasonably accurate result. Moment matching offers a more efficient alternative. (Image by Ralf Roletschek, permission under CC BY-SA 3.0.)

This section offers an alternative to Monte Carlo simulation for evaluating functions of random variables, especially for catastrophe risk modeling and 2nd-generation performance-based earthquake engineering (PBEE-2). Cat models and PBEE-2 commonly deal with functions of lognormally distributed random variables, e.g., to characterize uncertain ground motion, structural response, component damage, and sometimes repair cost and downtime.

Monte Carlo simulation offers a conceptually simple but sometimes computationally demanding approach. Moment matching offers an efficient alternative. Moment matching is an extension of Gaussian quadrature (see the Wikipedia article here: <https://goo.gl/wux6xA>) and another name for the extended Kalman filter proposed by Julier et al. (2000). Ching et al. (2009) detail its application to PBEE-2. This section offers a simple practical introduction for the beginner.

Let us first consider a function of a single lognormal random variable X , whose median value is θ and whose standard deviation of its natural logarithm is β , try a moment-matching sampling approach instead. Use just five points x_i , evaluate your function $z(x)$ at each point x_i , and assign each sample $z(x_i)$ unequal weight w_i , rather than the equal weight you would assign them with Monte Carlo simulation. (Later we can consider functions of two or more uncorrelated lognormal random variables.) Table 7 suggests the five points and their weights. Let us refer to the five points and their weights as the sigma set.

Figure 24 illustrates how this sampling method approximates the lognormal probability density function. The large middle bar is centered at the median ($i = 0$)—which is the same as the mean of $\ln(X)$ —and has an area of 0.6. (In a probability density function, area equates with the probability of the uncertain quantity taking on an X -value in that area. The leftmost bar represents sample $i = 1$ in the table. It is centered at an X -value two standard deviations below the mean in the logarithmic domain, and it has an area of 0.1. The next bar to its right ($i = 2$) is centered at an X -value one standard deviation below the mean in the logarithmic domain and has an area of 0.1. The bars to the right of the middle bar ($i = 3$ and $i = 4$) are symmetric to those to the left in the log domain, meaning that the ratio of the x -values of the upper middle bar to the middle bar is the same as that of the middle bar to the lower-middle bar. Similarly the ratio of the x -value of the right-hand bar to that of the middle bar is the same as the ratio of the x -value of the middle bar to that of the left bar. To be clear: the *ratios* are the same ($x_3/x_0 = x_0/x_2$, and $x_4/x_0 = x_0/x_1$), not the *differences* ($x_3 - x_0 \neq x_0 - x_2$, and $x_4 - x_0 \neq x_0 - x_1$).

Table 7. Sample points (the sigma set) and weights for 5-point moment matching of a lognormal random variable

i	x_i	w_i	Meaning
0	θ	0.60	A probability of 0.6 located at the mean of $\ln X$, equal to the median of X
1	$\theta \cdot \exp(-2 \cdot \beta)$	0.10	A probability of 0.1 located 2 standard deviations below the mean in log space
2	$\theta \cdot \exp(-1 \cdot \beta)$	0.10	A probability of 0.1 located 1 standard deviation below the mean in log space
3	$\theta \cdot \exp(1 \cdot \beta)$	0.10	A probability of 0.1 located 1 standard deviation above the mean in log space
4	$\theta \cdot \exp(2 \cdot \beta)$	0.10	A probability of 0.1 located 2 standard deviations above the mean in log space

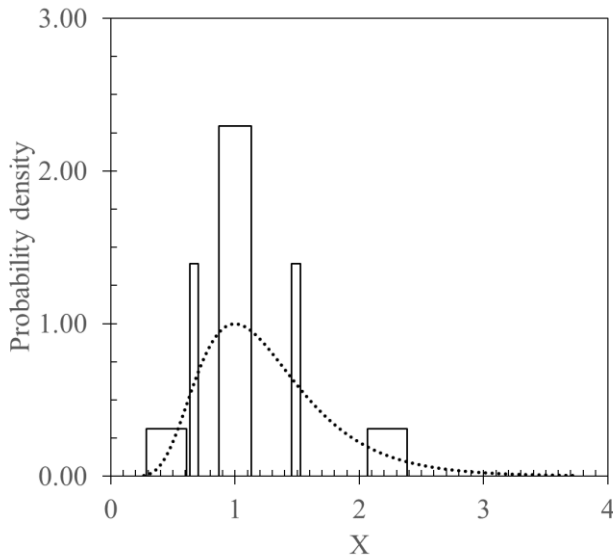


Figure 24. 5-point moment matching for a lognormal probability distribution

These particular positions and weights for the samples of X are not chosen arbitrarily, but because they approximate the first several moments of the continuous distribution of X , that is, because the first, second, third, and fourth moments of the two distributions are about the same, meaning

$$\sum_{i=0}^4 w_i \cdot \hat{x}_i^n \approx \int_0^{\infty} x^n f_X(x) dx \text{ and } n \in \{1, 2, 3, 4, 5\} \quad (81)$$

where the hat over the x on the left-hand side of the equation refers to the samples (the sigma set), and the x on the right side refers to any particular value of the continuous random variable X . One

can choose slightly different values of x_i and w_i to get slightly better agreement between the first few moments of the continuous distribution and the samples. I chose the positions and weights in Table 7 because they are easy to remember (1 and 2 logarithmic standard deviations and weights of 0.1), and because they are symmetrical about the median.

We can consider a function $z(X,Y)$ of two uncorrelated lognormal random variables X and Y with a slight modification, as shown in Table 8. In the table, θ_X denotes the median of X and β_X denotes the standard deviation of the natural logarithm of X (which one might call the logarithmic standard deviation of X for brevity). Similar notation is used for the median and the logarithmic standard deviation of Y . All the points for X remain the same, but their Y -value is the median of Y . We add four more points, each with an X -value of the median of X , and having Y -values ± 1 and ± 2 logarithmic standard deviations from the median. The four new points 5, 6, 7, and 8 each have a weight of 0.1, just like samples 0, 1, 3, and 4. The weight of sample 2 (at the median values of X and Y) is reduced to 0.2 so that the weights still sum to 1.0. Why must the weight at the central point of X be so low? Because the new samples along the Y -axis are also located with X -values of θ_X , so the sum of weights of samples at $X = \theta_X$ is still 0.6.

One can extend the method to any number of uncorrelated random variables. Sampling a function of n uncorrelated lognormal random variables requires $4n + 1$ samples. The weight of each sample except sample 0 is $w_1 = w_2 = w_3 = \dots = 0.1$, while the weight of sample 0, $w_0 = 1 - 0.4 \cdot n$. It is okay for the weight of sample 2 to be negative. For more of the mathematical details, including an exploration of how efficient moment matching is compared with Monte Carlo simulation and other methods, see Ching et al. (2009). For more mathematical details, see Julier et al. (2000).

Table 8. Moment matching points for two uncorrelated lognormal random variables X and Y

i	x_i	y_i	w_i
0	θ_X	θ_Y	0.20
1	$\theta_X \cdot \exp(-2 \cdot \beta_X)$	θ_Y	0.10
2	$\theta_X \cdot \exp(-1 \cdot \beta_X)$	θ_Y	0.10
3	$\theta_X \cdot \exp(+1 \cdot \beta_X)$	θ_Y	0.10
4	$\theta_X \cdot \exp(+2 \cdot \beta_X)$	θ_Y	0.10
5	θ_X	$\theta_Y \cdot \exp(-2 \cdot \beta_Y)$	0.10
6	θ_X	$\theta_Y \cdot \exp(-1 \cdot \beta_Y)$	0.10
7	θ_X	$\theta_Y \cdot \exp(+1 \cdot \beta_Y)$	0.10
8	θ_X	$\theta_Y \cdot \exp(+2 \cdot \beta_Y)$	0.10

8. Exercises

Exercise 1. Parts of a lognormal fragility function

Consider the component in the PACT fragility database, B2022.001, “Curtain Walls - Generic Midrise Stick-Built Curtain wall, Config: Monolithic, Lamination: Unknown, Glass Type: Unknown, Details: Aspect ratio = 6:5, Other details Unknown.” Consider the 1st damage state (labeled DS1 in the PACT fragility database). Answer the following questions:

1. What are the median and logarithmic standard deviation of capacity?
2. What is the measure of capacity, i.e., the units of X ?
3. What is the damage state?
4. How is it repaired?
5. Plot the fragility function. On the plot, show θ and find a way to illustrate β . Comply with the instructions on chart style in Section 8.2.

Solution

1. $\theta = 0.0338$, $\beta = 0.40$
2. Demand parameter: “Story drift ratio” (i.e. peak transient drift ratio)
3. DS 1 description: “Glass cracking.”
4. DS 1 repair description: “Replace cracked glass panel.”
5. Fragility function shown in Figure 25.

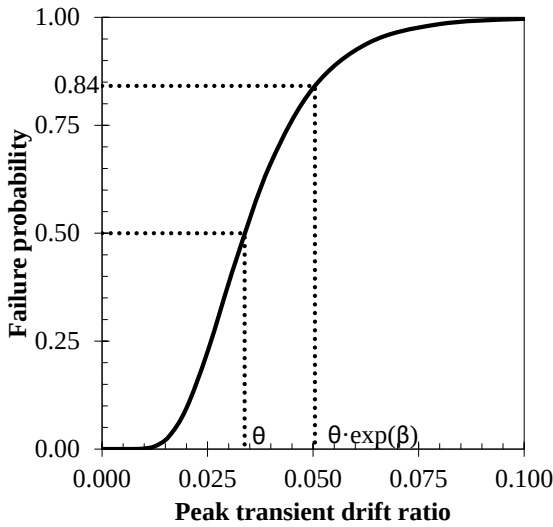


Figure 25. Exercise 1 fragility function

Exercise 2. Basic elements of an earthquake rupture forecast

Imagine an earthquake rupture forecast with 2 models, $N_E = 2$. In both models there are only two faults ($N_F(e) = 2$), each 10 km from the site of interest. In the 1st earthquake rupture forecast ($e = 1$), the faults are each 10 km from the site in question, and can only rupture with one magnitude, M6.5, at one location ($N_o = 1$), with occurrence rates

$$G(f=1, m=6.5 \pm 0.05, o=1 | E=1) = 0.008 \text{ yr}^{-1} \text{ (occurrences per year)}$$

$$G(f=2, m=6.5 \pm 0.05, o=1 | E=1) = 0.010 \text{ yr}^{-1}$$

In the 2nd earthquake rupture forecast ($e=2$), the faults are each 10 km from the site, can only rupture with M7.0 at one location ($N_o=1$), with occurrence rates

$$G(f=1, m=7.0 \pm 0.05, o=1 | E=2) = 0.0024 \text{ yr}^{-1}$$

$$G(f=2, m=7.0 \pm 0.05, o=1 | E=2) = 0.003 \text{ yr}^{-1}$$

Suppose we believe earthquake rupture forecast 1 twice as much as we believe 2,

$$\begin{aligned} P[E=1] &= 0.67 \\ P[E=2] &= 0.33 \end{aligned}$$

We use $N_A=2$ (imaginary) attenuation relationships:

Able et al. (2013) (denoted by $A = 1$) and
Baker et al. (2013) (denoted $A = 2$).

Suppose we diplomatically assign Able and Baker the same confidence,

$$\begin{aligned} P[A=1] &= 0.5 \\ P[A=2] &= 0.5 \end{aligned}$$

Say we are interested in the frequency of ground motion measured by 5% damped 0.2-sec spectral acceleration response $S_a(0.2 \text{ sec}, 5\%)$ exceeding 0.25g. Let us denote $S_a(0.2 \text{ sec}, 5\%)$ by SA02 for short. Under the two relationships the earthquakes in question produce the probabilities shown in Table 9.

Table 9. Exercise 2 quantities of $P[H \geq h | m, r, v, a]$

Ground-motion-prediction equation a	$m=6.5, r = 10 \text{ km},$ $V_{s30} = 360 \text{ m/sec}$	$m=7.0, r = 10 \text{ km},$ $V_{s30} = 360 \text{ m/sec}$
Able et al. (2013)	0.20	0.50
Baker et al. (2013)	0.25	0.45

Questions:

1. What is the rate of $SA02 > 0.25$?
2. What if we were not sure about V_{s30} , and thought it was possible that $V_{s30} = v_1$ or v_2 or ... with probabilities $P[V_{s30}=v]$. Rewrite the hazard equation (the equation for $G(h)$) to include $P[V_{s30}=v]$.

Solution:

From Equation (48)

$$G(h) = \sum_{e=1}^{N_E} \sum_{a=1}^{N_A} \sum_{f=1}^{N_f(e)} \sum_m \sum_{o=1}^{N_o(f,m)} P[H > h | m, r, v, a] \cdot G(m, f, o | E = e) \cdot P[A = a] \cdot P[E = e]$$

$$h = 0.25g$$

$$N_E = 2$$

$$N_A = 2$$

$$N_f(1) = N_f(2) = 2$$

$$m = 6.5 \text{ for } e = 1, m = 7 \text{ for } e = 2$$

$$N_o(f, m) = 1 \text{ in each earthquake rupture forecast and each fault}$$

e	a	f	m	o	$P[H > h m, r, v, a]$	$G(m, f, o E = e)$	$P[A = a]$	$P[E = e]$	Summand
1	1	1	6.5	1	0.20	0.0080	0.5	0.67	0.0005360
1	1	2	6.5	1	0.20	0.0100	0.5	0.67	0.0006700
1	2	1	6.5	1	0.25	0.0080	0.5	0.67	0.0006700
1	2	2	6.5	1	0.25	0.0100	0.5	0.67	0.0008375
2	1	1	7	1	0.50	0.0024	0.5	0.33	0.0001980
2	1	2	7	1	0.50	0.0030	0.5	0.33	0.0002475
2	2	1	7	1	0.45	0.0024	0.5	0.33	0.0001782
2	2	2	7	1	0.45	0.0030	0.5	0.33	0.0002228
Sum = $G(0.25g)$									0.0035600

The rate of $SA_{02} > 0.25$ is therefore 0.0036 yr^{-1} .

If we were uncertain about V_{s30} , we could apply the theorem of total probability and rewrite Equation (48) as

$$G(h) = \sum_{e=1}^{N_E} \sum_{a=1}^{N_A} \sum_{f=1}^{N_f(e)} \sum_{m=1}^{N_o(f,m)} \sum_v P[H > h | m, r, v, a] \cdot G(m, f, o | E = e) \cdot P[A = a] \cdot P[E = e] \cdot P[V_{s30} = v] \quad (82)$$

where the last summation is over all possible values of V_{s30} .

Exercise 3. Hazard curves


Next, consider the geographic location of the Los Angeles, California City Hall. Find the latitude and longitude of the main entrance (on the west façade of the building at the base of the tower), such as by using Google Earth. Find the OpenSHA site data app and the hazard curve calculator. (Google OpenSHA.) Get the V_{s30} from Wills and Clahan (2006) and from Wald and Allen (2007). Use the average of the two in subsequent calculations. Calculate the site hazard in terms of the probability of it experiencing at least one earthquake in which the shaking exceeds various levels of $S_a(0.2 \text{ sec}, 5\%)$ in 1 year. Show that you understand how to calculate seismic hazard by answering the following questions.

1. What are the latitude and longitude in decimal degrees N and E? (California has negative east longitude. Four decimal places is appropriate accuracy here, roughly $\pm 6 \text{ m}$.)
2. What are the approximate V_{s30} and NEHRP site soil class according to Wills and Clahan (2006)? Wald and Allen (2008)?
3. Use the OpenSHA hazard curve local-mode application to plot the hazard curve for the site. Use the Wills and Clahan (2006) value of V_{s30} , the intensity measure type (IMT) $S_a(0.2 \text{ sec}, 5\%)$, the Campbell and Bozorgnia (2008) ground-motion-prediction equation (called an intensity measure relationship, IMR by OpenSHA), the UCERF2 single-branch earthquake rupture forecast, a 1-year duration, start year whatever the next calendar year is, and everything else the application requires left to its default value.
4. If the site had $V_{s30} = 390 \text{ m/sec}$, what would be the probability that it would experience $S_a(0.2 \text{ sec}, 5\%) \geq 0.25g$ in the coming calendar year?
5. What is the probability that it would experience $0.25g \leq S_a(0.2 \text{ sec}, 5\%) < 0.50g$ at least once in the coming calendar year?


6. What is the occurrence rate of $S_a(0.2 \text{ sec}, 5\%) \geq 0.25$, in events per year?
7. What is the probability that $S_a(0.2 \text{ sec}, 5\%) \geq 0.25$ will occur at least once in the 50 years between 1 January 2014 and 31 Dec 2063?

Solution:


1. The west entrance is at 34.0539N, -118.2431E, as shown below.

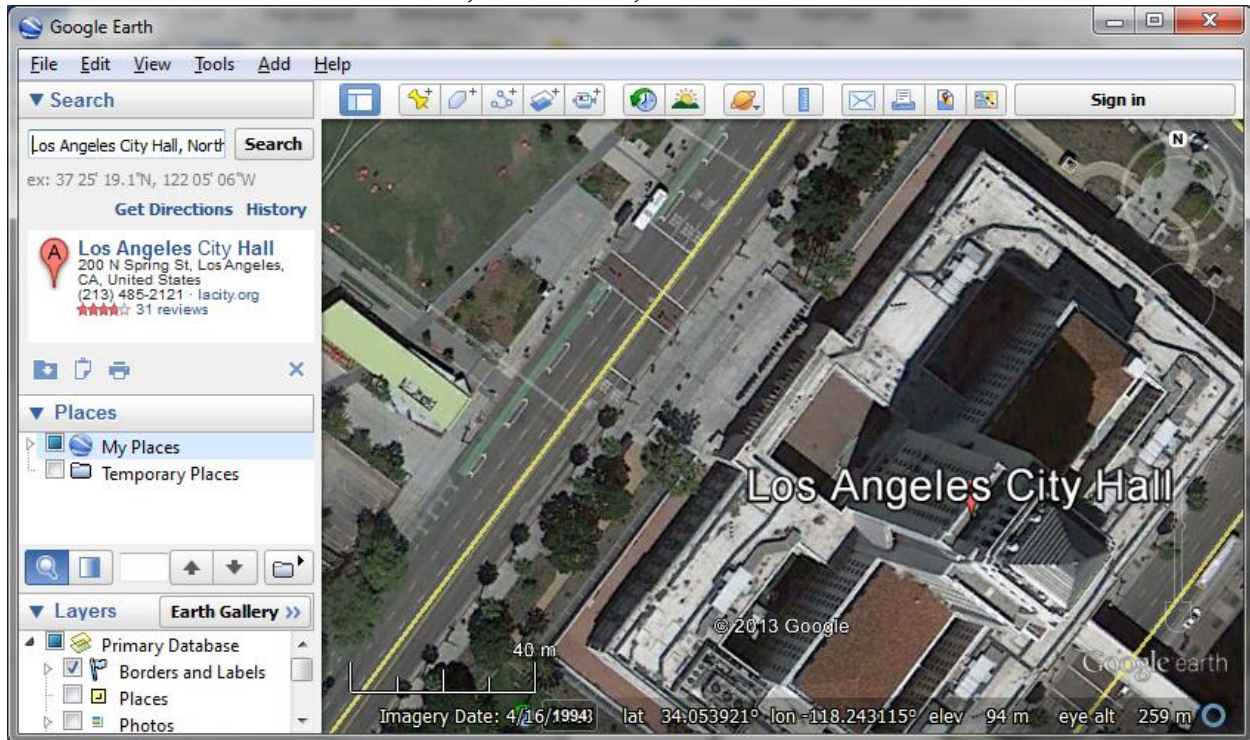

2. OpenSHA's site data application estimates $V_{s30} = 390 \text{ m/sec}$ by Wills and Clahan (2006) and 378 m/sec by Wald and Allen (2008).

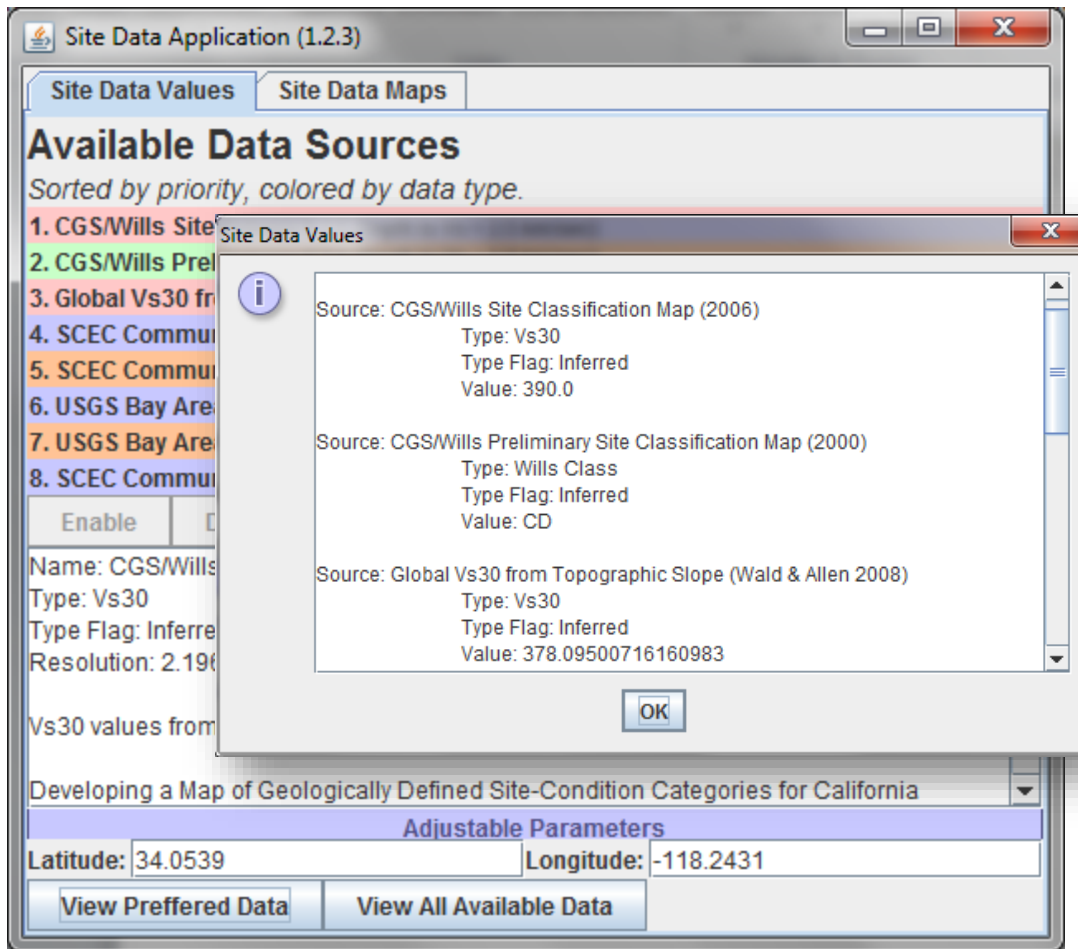

3. Here is the hazard curve.

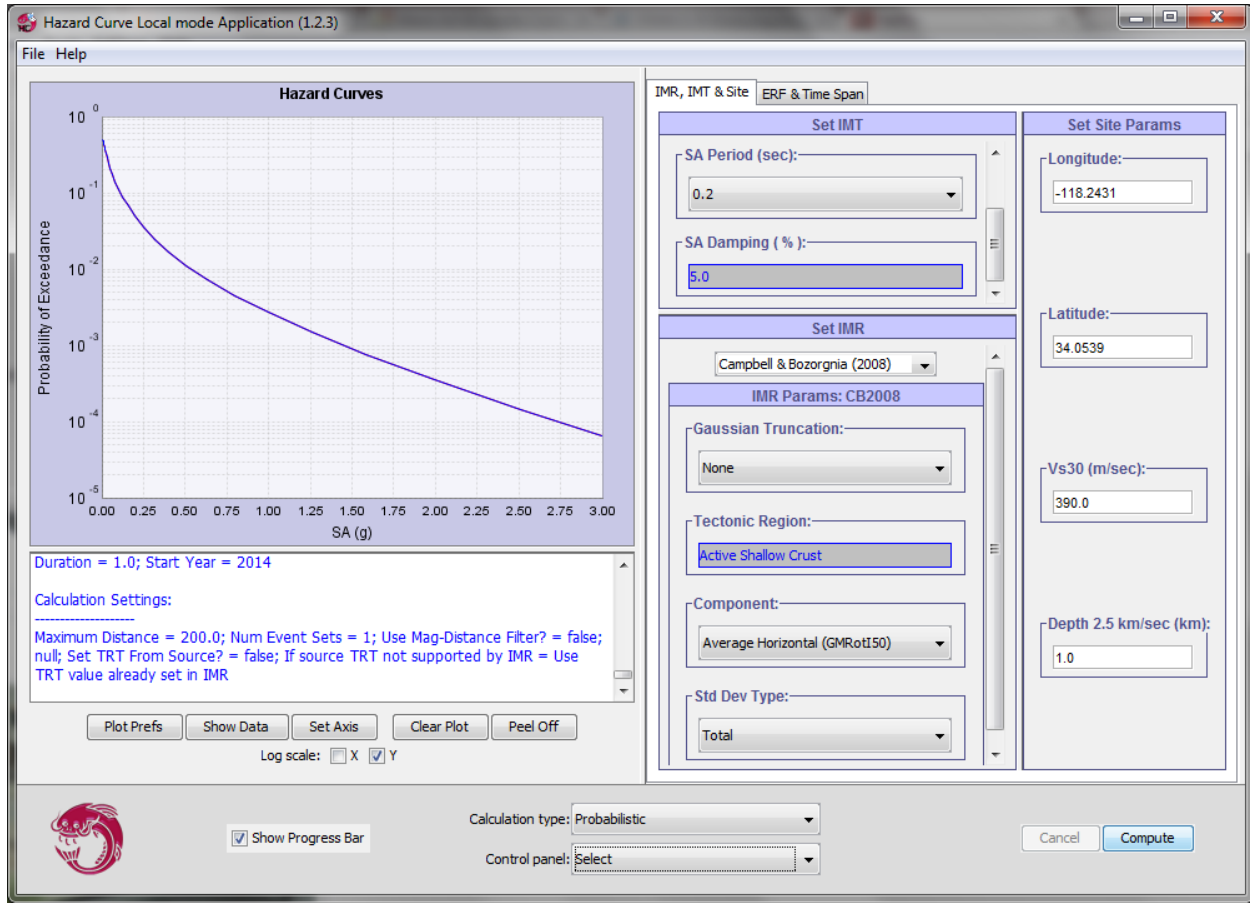

4. The plot in part 3 (and the data behind it, press the “show data” button) says that Los Angeles City Hall will experience $S_a(0.2 \text{ sec}, 5\%) \geq 0.25g$ at least once in 2014 with approximately 3.5% probability.

5. The plot in part 3 and the data behind it show that the probability that $S_a(0.2 \text{ sec}, 5\%) \geq 0.50g$ at least once in 2014 is 1.1%. Therefore, the probability that $0.25g \leq S_a(0.2 \text{ sec}, 5\%) < 0.50g$ at least once in the coming calendar year is $3.5\% - 1.1\% = 2.4\%$.

6. By Equation (49),

$$\begin{aligned}
 G &= \frac{-\ln(1-P)}{t} \\
 &= \frac{-\ln(1-0.035)}{1\text{yr}} \\
 &= 0.036\text{yr}^{-1}
 \end{aligned}$$

7. By Equation (50),

$$\begin{aligned}
 P &= 1 - e^{-G \cdot t} \\
 &= 1 - e^{-0.036\text{yr}^{-1} \cdot 50\text{yr}} \\
 &= 0.83
 \end{aligned}$$

Exercise 4. The lognormal distribution

Questions:

1. Why must a quantity that is lognormally distributed be positive?
2. Suppose $P[X \leq 2] = 0.75$ and $P[X \leq 3] = 0.95$. What is $P[2 < X \leq 3]$?
3. In Equations (18), (47), and (6), why do the inequalities switch direction, and why is there sometimes a $1 - \Phi$ and sometimes just Φ ?
4. Why is the numerator in the argument sometimes a difference and sometimes the natural logarithm of a ratio?

Solution:

1. A lognormally distributed random variable is one whose natural logarithm is normally distributed. A normally distributed random variable can take on any value between $-\infty$ and $+\infty$, which means the natural logarithm of the random variable can take on any value between $-\infty$ and $+\infty$, which means that the variable itself can take on any value between $e^{-\infty}$ and $e^{+\infty}$, which is the same as saying any positive (nonzero, nonnegative) scalar value.
2. $P[2 < X \leq 3] = P[X \leq 3] - P[X \leq 2] = 0.95 - 0.75 = 0.2$.
3. The inequality in Equation (18) refers to the probability that a component with uncertain damage will exceed damage state d given excitation x . In Equation (6), the inequality indicates that the term on the right hand side is a cumulative distribution function, which gives the probability that the uncertainty capacity X is less than or equal to x . In Equation (47), we are concerned with the probability that a lognormally distributed variable H exceeds h , which is the same as 1 minus the probability that it is less than or equal to h , which is the same as 1 minus the cumulative distribution function of H evaluated at h .
4. The natural logarithm of a ratio $\ln(a/b)$ is the same as the difference $\ln a - \ln b$.

Exercise 5. Hazard deaggregation

Consider the site and soil conditions from Exercise 3. Hazard curve. Find the modal magnitude M , distance R , and ε_0 associated with $S_a(0.2 \text{ sec}, 5\%)$ that has 1/475-yr exceedance frequency.

Solution. From <https://geohazards.usgs.gov/deaggint/2008/>, the modal $M = 6.6$, $R = 5 \text{ km}$, as shown in Figure 26.

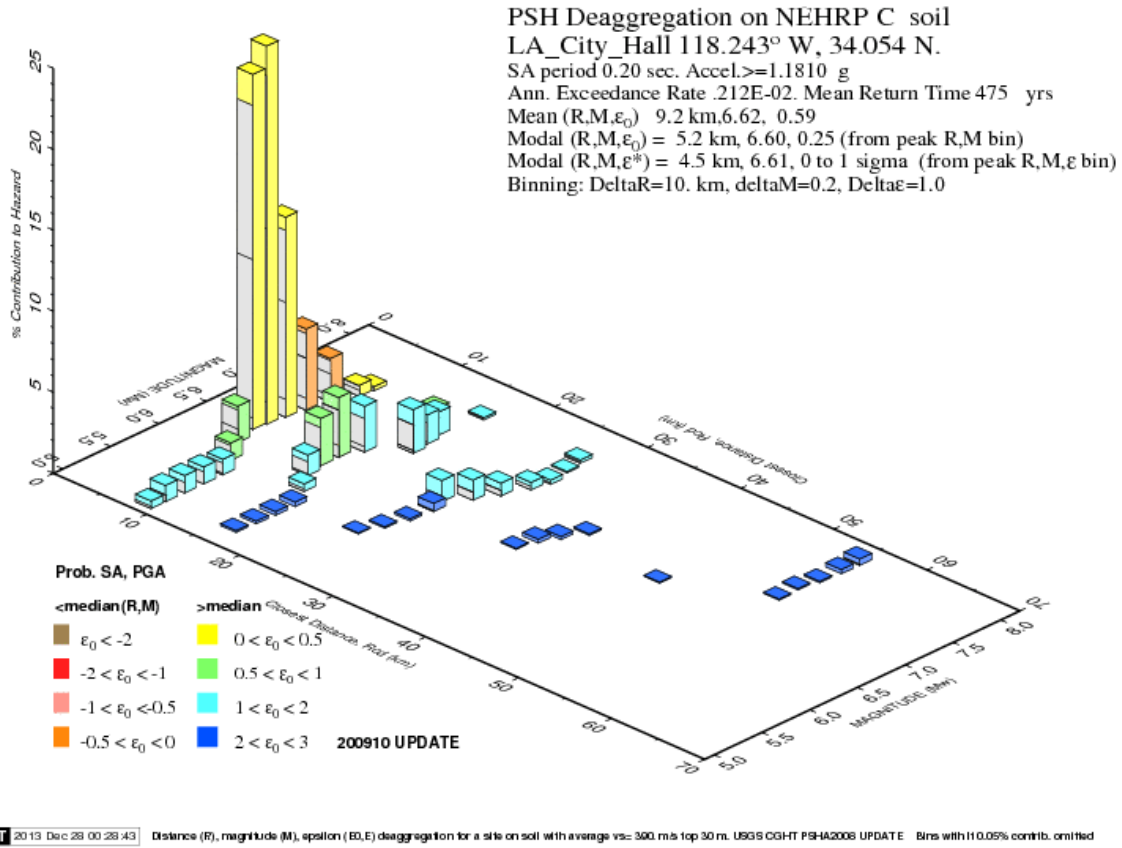


Figure 26. 475-year (10%/50-year) Sa(0.2 sec, 5%) hazard deaggregation at LA City Hall

Exercise 6. Estimate MMI from ground motion

Consider the 475-year seismic hazard derived in Exercise 5. Hazard deaggregation. Repeat the 475-year hazard deaggregation using Sa(0.3 sec, 5%) and estimate the associated MMI using the Atkinson and Kaka (2007) equation that considers M and R .

Solution. From Sa(0.3 sec, 5%) = 1.18g, $M = 6.6$, $R = 5$ km. From Equation (54),

$$\begin{aligned}
 MMI &= c_3 + c_4 \cdot \log_{10}(Y) + c_5 + c_6 \cdot M + c_7 \cdot \log_{10}(R) \quad MMI > 5 \\
 &= -1.83 + 3.56 \cdot \log_{10}\left(1.18g \cdot 981 \frac{\text{cm/sec}^2}{g}\right) - 0.11 - 0.20 \cdot 6.6 + 0.64 \cdot \log_{10}(5) \\
 &= 8.1
 \end{aligned}$$

i.e., MMI = VIII.

Exercise 7. Write the equation for component failure rate

1. Explain Equation (56) in words. Why is there a negative sign in the integrand?
2. Explain Equation (57) in words. Why did the negative sign go away?
3. Imagine that a component with median peak floor acceleration capacity of $\theta = 0.25g$ and logarithmic standard deviation of $\beta = 0.4$ were located on the roof of a 0.2-sec building at the location from “Exercise 3. Hazard curve.” Write out the equation for the probability that it would experience the selected damage state at least once in the coming calendar year in terms of $F(x)$ (the fragility function) and $G(x)$ (the hazard curve in terms of exceedance frequency). Evaluate it by Equation (56). Evaluate it by Equation (57).

Solution

1. The failure rate is the probability of failure at any given level of excitation x times the occurrence rate of x , integrated over all x . The failure probability given x is denoted by $F(x)$, and the occurrence rate of x is the negative first derivative of the exceedance rate of x . The negative sign is there because the exceedance rate has a negative slope, so its first derivative is negative.
2. Using integration by parts, the failure rate is the product of the failure probability given x and the exceedance rate of x , minus the integral of the product of the first derivative of the failure probability and the exceedance rate of x , the difference evaluated over all x . The minus signs cancel. The initial product is zero at $x = 0$ because the failure probability is zero. The initial product is zero at $x = \text{infinity}$ because the exceedance rate is zero.
3. Recall that $F_1(x) = \Phi\left(\frac{\ln(x/\theta)}{\beta}\right)$. Equation (56) becomes

$$\lambda = \int_{x=0}^{\infty} -\Phi\left(\frac{\ln(x/\theta)}{\beta}\right) \frac{dG(x)}{dx} dx$$

Evaluating numerically, this becomes

$$\lambda \approx \sum_{i=1}^{N-1} \frac{1}{2} \left(\Phi\left(\frac{\ln(x_i/\theta)}{\beta}\right) + \Phi\left(\frac{\ln(x_{i+1}/\theta)}{\beta}\right) \right) \cdot (G(x_i) - G(x_{i+1}))$$

The summands are shown in Table 10, the column labeled “Eq 27.” The sum is 0.042, meaning an average of 0.042 failure-causing earthquakes per year, or a mean failure recurrence interval of 24 years. The table shows some of the summands at the beginning, middle, and end of the x values. Equation (57) becomes

$$\lambda = \int_{x=0}^{\infty} \frac{d\Phi\left(\frac{\ln(x/\theta)}{\beta}\right)}{dx} \cdot G(x) dx$$

Numerically using the trapezoidal rule, this becomes

$$\lambda \approx \sum_{i=1}^{N-1} \frac{1}{2} (G(x_i) + G(x_{i+1})) \cdot \left(\Phi\left(\frac{\ln(x_i/\theta)}{\beta}\right) - \Phi\left(\frac{\ln(x_{i+1}/\theta)}{\beta}\right) \right)$$

The summands are shown in Table 10, the column labeled “Eq 28.” The sum is the same: 0.042 failure-causing earthquakes per year.

Table 10. Numerical solution to exercise 7

x	P[X>x]	G(xi)	F(xi)	Eq 27	Eq 28
1.00E-04	0.4995	0.6922	1.69E-85	0.00E+00	3.64E-80
1.30E-04	0.4995	0.6922	5.27E-80	0.00E+00	5.98E-76
1.60E-04	0.4995	0.6922	8.65E-76	0.00E+00	1.50E-71
2.00E-04	0.4995	0.6922	2.17E-71	0.00E+00	2.77E-67
6.31E-02	0.1733	0.1903	2.89E-04	4.56E-05	3.06E-04
7.94E-02	0.1408	0.1518	2.08E-03	2.14E-04	1.21E-03
1.00E-01	0.1122	0.1190	1.10E-02	7.43E-04	3.39E-03
1.26E-01	0.0875	0.0916	4.32E-02	1.93E-03	6.75E-03
5.01E+00	0.0000	0.0000	1.00E+00	3.04E-06	7.68E-20
6.31E+00	0.0000	0.0000	1.00E+00	6.78E-07	1.62E-22
7.94E+00	0.0000	0.0000	1.00E+00	1.26E-07	0.00E+00
1.00E+01	0.0000	0.0000	1.00E+00		
			Sum =	0.0420	0.0420

Exercise 8. Sequential damage states

Pick a component from the PACT fragility database with 2 sequential damage states, each with the same demand parameter (e.g., both peak transient drift PTD or both PFA), from the PACT database. Plot both fragility functions on the same chart. Label your axes, show the proper min and max values (where appropriate), and label θ_1 and θ_2 . Pick a value of x where both fragility functions have a y -value between 0.1 and 0.9, and show $P[D = 0 \mid X = x]$, $P[D = 1 \mid X = x]$, and $P[D = 2 \mid X = x]$.

Exercise 9. Simultaneous damage states


Consider component D1014.011, traction elevator California 1976 or later, from the PACT database.

1. Plot the fragility function.
2. Consider $x = 0.6$ g. What is the probability that the component is damaged in some way?
3. Again consider $x = 0.6$ g. What is the probability that it experiences damage state 1 but not any of the other damage states? Show your work.

Solution.

Part 1.

$\theta = 0.39$ g peak floor acceleration (at ground level, meaning peak ground acceleration)
 $\beta = 0.45$

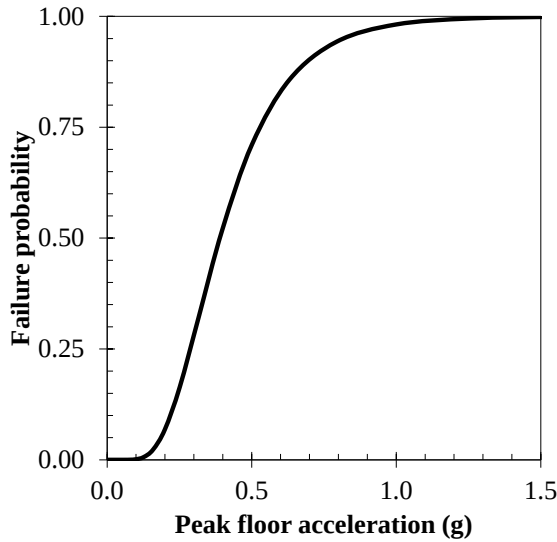

Part 2.

$$P[D \geq 1 | X = 0.6g] = \Phi\left(\frac{\ln(0.6/0.39)}{0.45}\right) = 0.83$$

Part 3.

$$P[D=1|D \geq 1] = 0.26$$

$$P[D=2|D \geq 1] = 0.79$$

$$P[D=3|D \geq 1] = 0.68$$

$$P[D=4|D \geq 1] = 0.17.$$

By Equation (23),

$$\begin{aligned} P[D=1 \& D \neq 2,3,4 | X = 0.6g] &= P[D \geq 1 | X = 0.6g] \cdot P[D=1 | D \geq 1] \cdot \prod_{j=2}^4 (1 - P[D=d_j | D \geq 1]) \\ &= 0.83 \cdot 0.26 \cdot (1 - 0.79) \cdot (1 - 0.68) \cdot (1 - 0.17) \\ &= 0.012 \end{aligned}$$

Exercise 10. MECE damage states

Consider the PACT database component D5092.032k, Diesel generator - Capacity: 1200 to 2000 kVa - Vibration isolated equipment that is not snubbed or restrained - Equipment fragility only.


1. Plot the fragility function
2. Suppose the generator were subjected to PFA = 0.8g. Evaluate $P[D = d | X = x]$ for all d . Show your work.

Solution

Part 1.

$$\theta = 1.07 \text{ g peak floor acceleration.}$$

$$\beta = 0.4$$

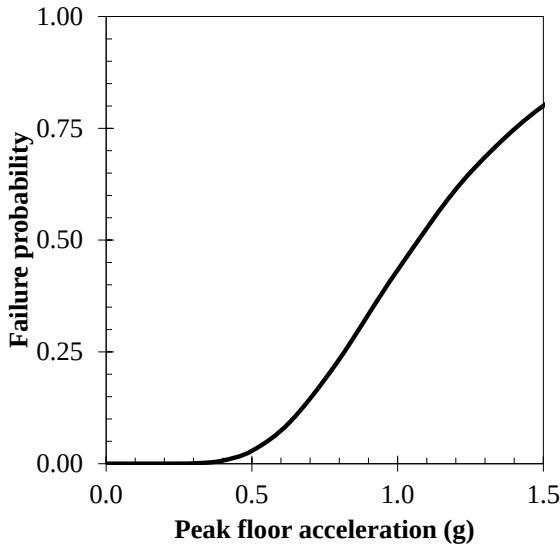

Part 2.

$$P[D \geq 1 \mid X = 0.8g] = 0.23$$

$$P[D = 1 \mid D \geq 1] = 0.7$$

$$P[D = 2 \mid D \geq 1] = P[D = 3 \mid D \geq 1] = P[D = 4 \mid D \geq 1] = 0.1$$

$$P[D = 1 \mid X = 0.8g] = 0.23 \cdot 0.7 = 0.161$$

$$P[D = 2 \mid X = 0.8g] = P[D = 3 \mid X = 0.8g] = P[D = 4 \mid X = 0.8g] = 0.23 \cdot 0.1 = 0.023$$

Exercise 11. Risk curve for number of injuries

Consider a facility with $N = 800$ occupants and a vulnerability function that expresses the mean number of injuries given peak ground acceleration s (denoted here by $E[Y|S=s]$) as shown in Table 11. The PGA hazard curve (mean rate of earthquakes per year with shaking exceeding s) is shown in the table column labeled $G(s)$. Assume earthquakes arrive as a Poisson process and injuries are uncorrelated, i.e., they have equal occurrence probability and an injury to person A does not affect the probability that person B is injured. Derive the 50-year risk curve, i.e., the probability P that at least y people will be injured in a single earthquake during the coming 50 years, as a function of y , i.e., at each of $y = 1, 2, \dots, N$.

Table 11. Vulnerability and hazard functions for exercise 11

PGA s (g)	E[Y S=s]	G(s)
0	0	0.7681
0.1	0	0.0596
0.2	1	0.0221
0.3	9	0.0121
0.4	29	0.0082
0.5	63	0.0061
0.6	121	0.0046
0.7	196	0.0035
0.8	286	0.0027
0.9	391	0.0020
1.0	512	0.0015

Solution:

First, calculate $f(s)$ according to Equation (69). For example, at $s = 0.3$ g, $f(s) = 9/800 = 0.01125$. Next, calculate the summands of Equation (70). For example, the probability that exactly 1 person is injured at $s = 0.3$ g is given by

$$P[Y = y | S = s] = \frac{N!}{y!(N-y)!} \cdot f(s)^y \cdot (1-f(s))^{(N-y)}$$

$$P[Y = 1 | S = 0.3g] = 800! / (1!(800-1)!) \cdot 0.01125^1 \cdot (1-0.01125)^{(800-1)}$$

$$= 0.001067$$

Performing the same calculation at $y = 2, 3, \dots$ and summing gives the probability that at least one person is injured at $s = 0.3g$:

$$P[Y \geq y | S = s] = \sum_{m=y}^N \left[{}_N C_m \cdot f(s)^m \cdot (1-f(s))^{(N-m)} \right]$$

$$P[Y \geq 1 | S = 0.3g] = \sum_{m=1}^{800} \left[{}_{800} C_m \cdot 0.01125^m \cdot (1-0.01125)^{(800-m)} \right]$$

$$= 0.001067 + 0.004852 + 0.014685 + \dots$$

$$= 0.999883$$

Repeating the process for $P[Y \geq y | S = x]$ at each level of s in 0, 0.1, 0.2, ... 1.0 g and each level of y in 1, 2, ... 800, the results are shown in Table 12.

Table 12. $P[Y \geq y | S=s]$ for exercise 11

s, g	Y					
	1	2	3	4	...	800
0.0	0.0000	0.0000	0.0000	0.0000		0.0000
0.1	0.0000	0.0000	0.0000	0.0000		0.0000
0.2	0.6324	0.2642	0.0802	0.0189		0.0000
0.3	0.9999	0.9988	0.9940	0.9793		0.0000
0.4	1.0000	1.0000	1.0000	1.0000		0.0000
0.5	1.0000	1.0000	1.0000	1.0000		0.0000
0.6	1.0000	1.0000	1.0000	1.0000		0.0000
0.7	1.0000	1.0000	1.0000	1.0000		0.0000
0.8	1.0000	1.0000	1.0000	1.0000		0.0000
0.9	1.0000	1.0000	1.0000	1.0000		0.0000
1.0	1.0000	1.0000	1.0000	1.0000		0.0000

Now calculate the terms m_i , a_i , and b_i of Equation (73), remembering that $\Delta s_i = 0.1g$ for all i . For example, m_3 is calculated as follows:

$$\begin{aligned}
 m_3 &= \ln(G_3/G_2)/\Delta s_3 \\
 &= \ln(0.0121/0.0221)/0.1 \\
 &= -6.024
 \end{aligned}$$

Likewise, a_3 and b_3 are given by

$$\begin{aligned}
 a_3 &= G_2(1 - \exp(m_3 \Delta s_3)) \\
 &= 0.0221 \cdot (1 - \exp(-6.024 \cdot 0.1)) \\
 &= 0.01000 \\
 b_3 &= \frac{G_2}{\Delta s_3} \left(\exp(m_3 \Delta s_3) \left(\Delta s_3 - \frac{1}{m_3} \right) + \frac{1}{m_3} \right) \\
 &= \frac{0.0221}{0.1} \left(\exp(-6.024 \cdot 0.1) \left(0.1 - \frac{1}{-6.024} \right) + \frac{1}{-6.024} \right) \\
 &= -0.004501
 \end{aligned}$$

The summand of Equation (73) for $y = 1$ and $i = 3$ is given by

$$\begin{aligned}
 \text{summand}_3 &= (p_2(y) \cdot a_3 - \Delta p_3(y) \cdot b_3) \\
 &= 0.6324 \cdot 0.01000 - (0.9999 - 0.6324) \cdot (-0.004501) \\
 &= 0.007978
 \end{aligned}$$

Summands for $y = 1$ through 4 and 800 for all values of i in 1, 2, ... 10, and the sums for Equation (73) are shown in Table 13. Recall that $R(y)$ near the bottom of the table denotes the rate at which at least y injuries occur, in events per year. Finally, we can calculate the probability that at least y fatalities occurs in $t = 50$ years using Equation (76). For example, the probability that at least 2 people are injured in a single earthquake during the next 50 years is given by

$$\begin{aligned}
 P[Y \geq 2 | 50 \text{ yr}] &= 1 - \exp(-R(2) \cdot 50) \\
 &= 1 - \exp(-0.020695 \cdot 50) \\
 &= 0.644680
 \end{aligned}$$

The bottom row of the table shows the risk curve, $P[Y \geq y | t = 50 \text{ yr}]$, which is then plotted in Figure 27.

Table 13. Summands and sums for exercise 11

i	s, g	Number of injuries y					
		1	2	3	4	...	800
1	0.1	0.000000	0.000000	0.000000	0.000000		0.000000
2	0.2	0.009928	0.004148	0.001259	0.000297		0.000000
3	0.3	0.007978	0.005949	0.004915	0.004512		0.000000
4	0.4	0.003900	0.003898	0.003887	0.003857		0.000000
5	0.5	0.002100	0.002100	0.002100	0.002100		0.000000
6	0.6	0.001500	0.001500	0.001500	0.001500		0.000000
7	0.7	0.001100	0.001100	0.001100	0.001100		0.000000
8	0.8	0.000800	0.000800	0.000800	0.000800		0.000000
9	0.9	0.000700	0.000700	0.000700	0.000700		0.000000
10	1.0	0.000500	0.000500	0.000500	0.000500		0.000000
$R(y) = \Sigma =$		0.028505	0.020695	0.016761	0.015366		0.000000
$P[Y \geq y t = 50]$		0.759553	0.644680	0.567450	0.536191		0.000000

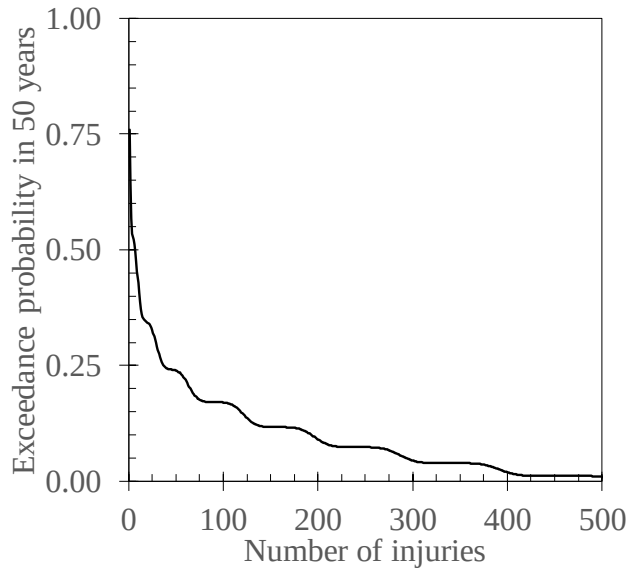


Figure 27. Risk curve for exercise 11

9. References

- (AAAM) Association for the Advancement of Automotive Medicine (2001). *The Abbreviated Injury Scale, 1990 Revision, Update 98*, Barrington, IL, 68 pp.
- Aagaard, B.T., R.W. Graves, D.P. Schwartz, D.A. Ponce, and R.W. Graymer, 2010a. Ground-motion modeling of Hayward Fault scenario earthquakes, part I: construction of the suite of scenarios. *Bulletin of the Seismological Society of America*, 100 (6) 2927–2944
- Aagaard, B.T., R.W. Graves, A. Rodgers, T.M. Brocher, R.W. Simpson, D. Dreger, N.A. Petersson, S.C. Larsen, S. Ma, and R.C. Jachens, 2010b. Ground-motion modeling of Hayward Fault scenario earthquakes, part II: simulation of long-period and broadband ground motions. *Bulletin of the Seismological Society of America*, 100 (6) 2945–2977
- American Society of Appraisers (2013). Definitions of Value Relating to MTS Assets.
- (ASCE) American Society of Civil Engineers, 2003. *SEI/ASCE 31-03: Seismic Evaluation of Existing Buildings*, Washington, DC, 444 pp.
- (ATC) Applied Technology Council (1985). ATC-13, Earthquake Damage Evaluation Data for California. Redwood City, CA, 492 pp.
- (ATC) Applied Technology Council (2012). FEMA P-58: Guidelines for Seismic Performance Assessment of Buildings, 100% Draft. Redwood City, CA.
- Atkinson, G. M. and Kaka, S.I. (2007). Relationships between felt intensity and instrumental ground motion. *Bulletin of the Seismological Society of America*, 97, 497–510
- Beck, J.L. (2009). A probability logic framework for treating model uncertainty for prior and posterior robust predictive system analyses. *Workshop on Statistical Methods for Dynamic System Models*, Vancouver, June 4-6 2009, http://people.stat.sfu.ca/~dac5/workshop09/James_Beck.html [viewed 29 May 2015]
- Beck, J.L., A. Kiremidjian, S. Wilkie, A. Mason, T. Salmon, J. Goltz, R. Olson, J. Workman, A. Irfanoglu, and K. Porter (1999). *Decision Support Tools for Earthquake Recovery of Businesses*, Final Report, CUREe-Kajima Joint Research Program Phase III, Consortium of Universities for Earthquake Engineering Research, Richmond, CA.
- Ching, J.Y., K.A. Porter, and J.L. Beck (2009). Propagating uncertainties for loss estimation in performance-based earthquake engineering using moment matching. *Structure and Infrastructure Engineering*. 5 (3): 245-262. <http://www.tandfonline.com/doi/abs/10.1080/15732470701298323>
- Cornell, C. A. (1968). Engineering seismic risk analysis. *Bulletin of the Seismological Society of America*. 58 (5), 1583-1606.
- Czarnecki, R.M. (1973). *Earthquake Damage to Tall Buildings*, Structures Publication 359. Massachusetts Institute of Technology, Cambridge, MA, 125 pp.
- Der Kiureghian, A., and O. Ditlevsen (2009). Aleatory or epistemic? Does it matter? *Structural Safety* 31 105–112. http://www.ripid.ethz.ch/Paper/DerKiureghian_paper.pdf [accessed 29 May 2015]
- Diaconis, P., S. Holmes, and R. Montgomery (2007). Dynamical bias in the coin toss. *SIAM Review* 49 (2), 211-235, <http://epubs.siam.org/doi/abs/10.1137/S0036144504446436?journalCode=siread>
- (FAA) Federal Aviation Administration (1998). *Economic Values for Evaluation of FAA Investment and Regulatory Decisions*, Report FAA-APO-98-8
- Faenza, L., & Michelini, A. (2010). Regression analysis of MCS intensity and ground motion parameters in Italy and its application in ShakeMap. *Geophysical Journal International*. 180, 1138-1152
- (FHWA) Federal Highway Administration (1994). *Technical Advisory: Motor Vehicle Accident Costs, Technical Advisory #7570.2*, U.S. Department of Transportation, Washington, D.C.

- Field, E. H., Dawson, T. E., Felzer, K. R., Frankel, A. D., Gupta, V., Jordan, T. H., Parsons, T., Petersen, M. D., Stein, R. S., Weldon II, R. J., & Wills, C. J. (2007). The Uniform California Earthquake Rupture Forecast, Version 2 (UCERF 2). USGS Open File Report 2007-1437
- Field, E.H., G.P. Biasi, P. Bird, T.E. Dawson, K.R. Felzer, D.D. Jackson, K.M. Johnson, T.H. Jordan, C. Madden, A.J. Michael, K.R. Milner, M.T. Page, T. Parsons, P.M. Powers, B.E. Shaw, W.R. Thatcher, R.J. Weldon II, and Y. Zeng (2013). *Uniform California Earthquake Rupture Forecast, Version 3 (UCERF3)—The Time-Independent Model*. U.S. Geological Survey Open-File Report 2013–1165, 97 p., California Geological Survey Special Report 228, and Southern California Earthquake Center Publication 1792, <http://pubs.usgs.gov/of/2013/1165/>
- Friedman, D.G., 1984. Natural hazard risk assessment for an insurance program. *The Geneva Papers on Risk and Insurance*, 9 (30): 57-128
- Graves, R.W. and P.G. Somerville, 2006. Broadband ground motion simulations for scenario ruptures of the Puente Hills Fault. *Proc. 8th National Conference on Earthquake Engineering*, ~18-21 Apr 2006, San Francisco CA
- Howard, R.A., 1988. Decision analysis: practice and promise. *Management Science* 34 (6), 679-695, <http://goo.gl/OLVJaA>
- Julier, S., Uhlmann, J., & Durrant-Whyte, H. F. (2000). A new method for the nonlinear transformation of means and covariances in filters and estimators. *IEEE Transactions on automatic control*, 45(3), 477-482.
- Kaestli, P. & Faeh, D. (2006). Rapid estimation of macroseismic effects and ShakeMaps using macroseismic data. *Proc. First European Conference on Earthquake Engineering and Seismology*, Geneva, Switzerland
- Kaka, S. I., & Atkinson, G. M. (2004). Relationships between instrumental ground-motion parameters and Modified Mercalli intensity in Eastern North America. *Bulletin of the Seismological Society of America*, 94 (5), 1728–1736
- Kazantzi, A.K., D. Vamvatsikos, K. Porter, and I. Cho, 2013. *Developing Analytical Vulnerability Functions for Highrise Buildings: a Case Study*. Global Vulnerability Consortium, Available from www.nexus.globalquakemodel.org/gem-vulnerability/posts/
- Keller, J.B., 1986. The probability of heads. *The American Mathematical Monthly*, 93 (3), 191-197, <http://links.jstor.org/sici?sici=0002-9890%28198603%2993%3A3%3C191%3ATPOH%3E2.0.CO%3B2-R>
- Kennedy, R.P., C.A. Cornell, R.D. Campbell, S. Kaplan, and H.F. Perla, 1980. Probabilistic seismic safety study of an existing nuclear power plant. *Nuclear Engineering and Design*. 59: 315-338.
- Kircher, C.A., A.A. Nassar, O. Kustu, and W.T. Holmes (1997). Development of building damage functions for earthquake loss estimation. *Earthquake Spectra*, 13 (4): 663-682
- Kustu, O., D.D. Miller, and S.T. Brokken (1982). *Development of Damage Functions for Highrise Building Components*, for the US Department of Energy, URS/John A Blume & Associates, San Francisco, CA
- McClure, F.E. (1973). *Performance of Single-Family Dwellings in the San Fernando Earthquake of February 9, 1971*, National Oceanic and Atmospheric Administration, Washington, D.C., 95 pp.
- Merz, K., 1991. *Generic Seismic Ruggedness of Power Plant Equipment*. EPRI NP-5223-SL Revision 1. Electric Power Research Institute, Oakland, CA, 248 pp.
- (MMC) Multihazard Mitigation Council (2005). *Natural Hazard Mitigation Saves: An Independent Study to Assess the Future Savings from Mitigation Activities*, National Institute of Building Sciences, Washington, DC. http://www.nibs.org/?page=mmc_projects#nhms
- Murphy, J. R. & O'Brien, L. J. (1977). The correlation of peak ground acceleration amplitude with seismic intensity and other physical parameters. *Bulletin of the Seismological Society of America*, 67, 877-915

- (NIBS and FEMA) National Institute of Building Sciences and Federal Emergency Management Agency (2012). *Multi-hazard Loss Estimation Methodology Earthquake Model Hazus®-MH 2.1 Technical Manual*. Federal Emergency Management Agency, Washington, DC, 718 pp.
- Porter, K.A. (2000). Assembly-Based Vulnerability of Buildings and its Uses in Seismic Performance Evaluation and Risk-Management Decision-Making. Doctoral Dissertation, Stanford University, Stanford, CA, 196 pp. <http://www.sparisk.com/pubs/Porter-2001-ABV-thesis.pdf>
- Porter, K.A., J.L. Beck, and R.V. Shaikhutdinov (2002). Sensitivity of building loss estimates to major uncertain variables. *Earthquake Spectra*, 18 (4), 719-743, www.sparisk.com/pubs/Porter-2002-Sensitivity.pdf
- Porter, K.A. (2003). An overview of PEER's performance-based earthquake engineering methodology. Proc. Ninth International Conference on Applications of Statistics and Probability in Civil Engineering (ICASP9) July 6-9, 2003, San Francisco, CA. Civil Engineering Risk and Reliability Association (CERRA), 973-980, <http://spot.colorado.edu/~porterka/Porter-2003-PEER-Overview.pdf>
- Porter, K.A., K. Shoaf, and H. Seligson (2006). Value of injuries in the Northridge Earthquake. *Earthquake Spectra*, 22 (2), May 2006, <http://www.sparisk.com/pubs/Porter-2006-VOI.pdf>
- Porter, K.A., Kennedy, R. P., and Bachman, R. E. (2007). Creating fragility functions for performance-based earthquake engineering. *Earthquake Spectra*. 23 (2), 471-489
- Porter, K.A., and K. Cobeen (2012). Informing a retrofit ordinance: a soft-story case study. *Proc. 2012 Structures Congress*, Chicago IL, March 29-31, 2012, <http://www.sparisk.com/pubs/Porter-2012-SSSC12-CAPSS.pdf>.
- Porter, K.A., E.H. Field, and K. Milner (2012). Trimming the UCERF2 hazard logic tree. *Seismological Research Letters*, 83 (5), 815-828
- Porter, K., K. Farokhnia, D. Vamvatsikos, and I. Cho (2015). *Guidelines for Component-Based Analytical Vulnerability Assessment of Buildings and Nonstructural Elements*, Global Vulnerability Consortium, Available from <http://www.sparisk.com/pubs/Porter-2015-GEM-Analytical-Vulnerability.pdf>
- Porter, K. (2017). When addressing epistemic uncertainty in a lognormal fragility function, how should one adjust the median? *Paper 2617, Proc., 16th World Conference on Earthquake Engineering, Santiago Chile, January 9 to 13, 2017* <http://www.sparisk.com/pubs/Porter-2016-16WCEE-Rotation-point.pdf>
- Sørensen, M. B., Stromeyer, D., & Grünthal, G. (2007). Deliverable 4.1: Generation of area-specific relationships between ground motion parameters (PGA, PGV) at certain sites, magnitude M and distance R to the causative fault and site intensities in terms of EMS-98. Databank of Intensity Data Points and Related Parameters, Seismic Early Warning for Europe. GFZ Potsdam 19.
- Trifunac, M. D. & Brady, A. G. (1975). On the correlation of seismic intensity scales with the peaks of recorded strong ground motion. *Bulletin of the Seismological Society of America* 65, 139-162.
- Tselentis, G. A. & Danciu, L. (2008). Empirical relationships between Modified Mercalli Intensity and engineering ground-motion parameters in Greece. *Bulletin of the Seismological Society of America* 98, 1863–1875.
- Urban Institute (1991). *The Costs of Highway Crashes, Final Report, Federal Highway Administration Contract DTFH61-85-C-00107*, The Urban Institute, Washington, DC, 144 pp.
- Wald, D. J., Quitoriano, V., Heaton, T. H., & Kanamori, H. (1999). Relationships between peak ground acceleration, peak ground velocity and Modified Mercalli Intensity in California. *Earthquake Spectra*, 15 (3), 557-564
- Wald, D. J. & Allen, T. I. (2007). Topographic slope as a proxy for seismic site conditions and amplification. *Bulletin of the Seismological Society of America*, 97, 1379-1395
- Wesson, R.L., D.M. Perkins, E.V. Leyendecker, R.J. Roth, and M.D. Petersen (2004). Losses to single-family housing from ground motions in the 1994 Northridge, California, Earthquake. *Earthquake Spectra*, 20 (3), 1021-1045. DOI:10.1193/1.1775238

- Wiggins, J.H., J. Slosson, and J. Krohn, 1976. *Natural Hazards: Earthquake, Landslide, Expansive Soil Loss Models*. J.H. Wiggins Company, Redondo Beach, CA
- Wills, C. J. & Clahan, K. B. (2006). Developing a map of geologically defined site-conditions categories for California. *Bulletin of the Seismological Society of America*, 96 (4A), 1483-1501
- Worden, C. B., Gerstenberger, M. C., Rhoades, D. A. & Wald, D. J. (2012). Probabilistic relationships between ground-motion parameters and Modified Mercalli Intensity in California. *Bulletin of the Seismological Society of America*, 102 (1), 204–221

Appendices

Appendix A presents a useful tool for deterministic sensitivity studies, to choose which parameters in a mathematical model matter, and for which ones you can safely ignore their uncertainty. Appendix B has to do with assigning an acceptable cost to avoid future statistical injuries and deaths. Appendix C gives additional guidance to my graduate students on how to write and defend your thesis. Appendix D contains a revision history for my own reference.

Appendix A: Tornado diagram for deterministic sensitivity

Introduction: which inputs matter most to an uncertain quantity?

Mathematical models of an uncertain real-world quantity y (such as the uncertain future cost to repair a building after an earthquake) often involve a set of uncertain input parameters x (such as how strongly the ground shakes). Analysts are commonly faced with one of two problems in such a situation: (1) it may be costly to study each input x sufficiently to quantify its probability distribution, or (2) each calculation of y may be costly, so it becomes costly to allow all of the inputs x to vary. In the former case, the analyst might want to deeply investigate only the important x values—those that contribute most strongly to uncertainty in y —and accept reasonable guesses as to the distributions of the other x values. In either case, the analyst might want to simplify the model by setting those x values that do not matter much at deterministic, best-estimate values. But how can one defensibly determine which inputs x matter? How much does uncertainty in each input parameter x (each independent variable) affect the result y (the dependent variable)?

An x might vary wildly but have little effect on y . An x might not vary much at all, but y could be very sensitive to it. We say that the x values whose uncertainty has strong effect on y are the ones that matter, the ones that we might need to know more about. The others don't matter, and we can take them at typical or best-estimate values, as if they did not vary at all for practical purposes. Once an analyst identifies the most important uncertainties, he or she can focus on understanding and quantifying those quantities and their effect on the quantity of interest y , and ignore the variability of the others, or at least treat them more causally.

One can use a tool called a tornado-diagram analysis to identify those important uncertainties. The tool produces a diagram (see Figure 28 for an example) that depicts the approximate effect of each uncertain input x on the quantity of interest y in the form of a horizontal bar chart that resembles a tornado in profile, hence the name. The method comes from the field of decision analysis (Howard 1988 may be the earliest work). Porter et al. (2002) may be its first proposed use in earthquake engineering. Other authors have used it in performance-based earthquake engineering and

seismology a few times since then. Here first is a brief overview of the procedure; there follow step-by-step instructions, a short list of advantages and disadvantages of the method, and an example problem completely worked out.

A brief overview of tornado-diagram analysis

1. Define the output variable y of interest.
2. Define its inputs x . Make sure the definitions of x and y pass the clarity test (chapter 2).
3. Create a mathematical function $f(x)$ to relate y to x , that is, $y = f(x)$.
4. Find or guess a low, typical (or best estimate), and high value of each x , i.e., x_{low} , x_{typ} , and x_{high} .
5. Evaluate a baseline value of y as using all the typical x values, i.e., $y_{baseline} = f(x_{1typ}, x_{2typ}, \dots)$
6. Estimate y using typical x values except one, which is set at its low value.
7. Repeat with the same input set to its high value. The difference between the last two outputs is referred to as the *swing* associated with the one input that was varied.
8. That input is then set back to its typical value and repeat the process for the next input, again setting all the other inputs to their typical value.
9. Sort the labels for the inputs in decreasing order of the swing associated with that input.
10. Create a horizontal bar chart by depicting the swing associated with each input variable as a bar whose ends are at the low and high values of the output produced by changing just that input. The horizontal axis is the value of the output y . The bars are arranged with the input that has the highest swing on the top, then the input with the second-highest swing, etc. A vertical line is drawn through the baseline value. See Figure 28 for an example. It shows that an output parameter labeled damage factor depends most on something called assembly capacity, then

S_a , then ground motion record, etc. It suggests that the analyst should understand the first two or three parameters best to understand variability in damage factor.

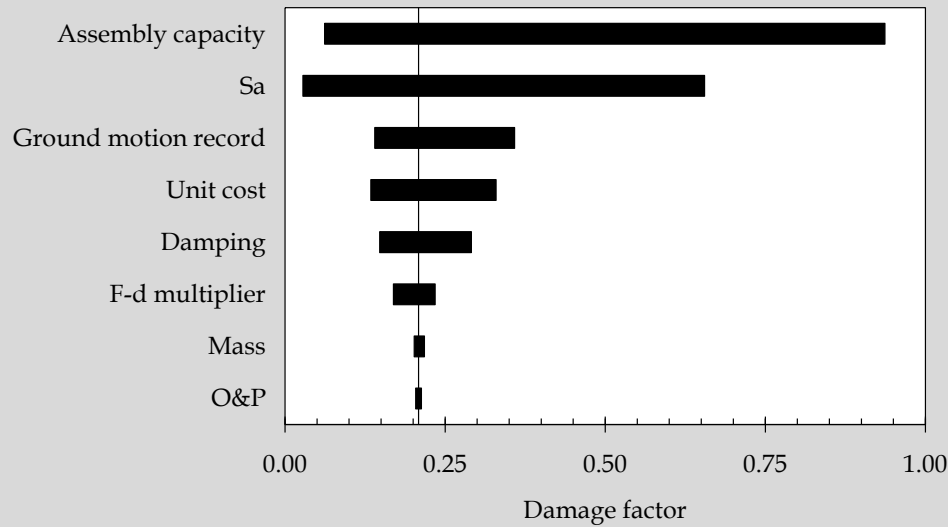


Figure 28. A sample tornado diagram that depicts how the earthquake-induced repair cost for a particular building is affected by various model parameters (Porter et al. 2002).

Tornado-diagram procedure

Now, more precisely, here is how to create a tornado diagram. Suppose you have a function for a quantity y that you care about and want to explore.

$$y = f(x_1, x_2, \dots, x_i, \dots, x_n) \quad (83)$$

Each x_i is an uncertain input quantity, expressed either with a cumulative distribution function or merely low, typical and high values that you might guess or find in the literature. If you want to use a *little* rigor in guessing low, typical, and high values, think of the values in terms of bets: what value of x would you bet 100:1 is the lowest you would find if you were to do a survey or some rigorous data-collection effort? What value of x would you bet 100:1 would *not* be exceeded? 50:50? Use those as your low, high, and typical (or best-estimate) values of x . Repeat for each x . Make a table of x like in Table 14.

Table 14. Tabulating input values for a tornado diagram

Input quantity	Low	Typical or best estimate	High
x_1	x_{1low}	x_{1typ}	x_{1high}
x_2	x_{2low}	x_{2typ}	x_{2high}
...			
x_i	x_{ilow}	x_{ityp}	x_{ihigh}
...			
x_n	x_{nlow}	x_{ntyp}	x_{nhigh}

In a research document such as a doctoral thesis, the literature review should provide a basis for completing the table, and one can add a comments column to the right to cite sources.

Now calculate

$$y_{baseline} = f(x_{1typ}, x_{2typ}, \dots x_{ityp}, \dots x_{ntyp})$$

This is the baseline y value. Now test the sensitivity of y to the uncertainty in each x :

$$\begin{aligned} y_{1low} &= f(x_{1low}, x_{2typ}, \dots x_{ityp}, \dots x_{ntyp}), \text{ i.e., all typical values except using } x_{1low} \\ y_{1high} &= f(x_{1high}, x_{2typ}, \dots x_{ityp}, \dots x_{ntyp}), \text{ i.e., all typical values except using } x_{1high} \\ y_{2low} &= f(x_{1typ}, x_{2low}, \dots x_{ityp}, \dots x_{ntyp}), \text{ i.e., all typical values including } x_{1typ}, \text{ except using } x_{2low} \\ y_{2high} &= f(x_{1typ}, x_{2high}, \dots x_{ityp}, \dots x_{ntyp}), \text{ i.e., all typical values including } x_{1typ}, \text{ except using } x_{2high} \\ &\dots \\ y_{ilow} &= f(x_{1typ}, x_{2typ}, \dots x_{ilow}, \dots x_{ntyp}) \\ y_{ihigh} &= f(x_{1typ}, x_{2typ}, \dots x_{ihigh}, \dots x_{ntyp}) \\ &\dots \\ y_{nlow} &= f(x_{1typ}, x_{2typ}, \dots x_{ityp}, \dots x_{nlow}) \\ y_{nhigh} &= f(x_{1typ}, x_{2typ}, \dots x_{ityp}, \dots x_{nhigh}) \end{aligned}$$

How sensitive is y to uncertainty in each x ? Measure it with a quantity called “swing.”

$$\begin{aligned} swing_1 &= |y_{1low} - y_{1high}| \\ swing_2 &= |y_{2low} - y_{2high}| \\ &\dots \\ swing_i &= |y_{ilow} - y_{ihigh}| \\ &\dots \\ swing_n &= |y_{nlow} - y_{nhigh}| \end{aligned}$$

Table 15. Tabulating output values for a tornado diagram

Input	y_{low}	y_{high}	Swing
x_1	y_{1low}	y_{1high}	$swing_1$
x_2	y_{2low}	y_{2high}	$swing_2$
...			
x_i	y_{ilow}	y_{ihigh}	$swing_i$
...			
x_n	y_{nlow}	y_{nhigh}	$swing_n$

Sort inputs x in decreasing order of swing, e.g., maybe:

$$swing_6 > swing_1 > \dots > swing_7$$

Now make a horizontal bar chart. The horizontal axis measures y . The uppermost (top) horizontal bar in the chart measures y_i with where i is the index for the input parameter with the largest swing. Its left end is the smaller of $\{y_{ilow}, y_{ihigh}\}$. Its right end is the larger of $\{y_{ilow}, y_{ihigh}\}$.

The next horizontal bar measures y_j where j is the index for the x -parameter with the 2nd-largest swing. Its left end is the smaller of $\{y_{jlow}, y_{jhigh}\}$. Its right end is the larger of $\{y_{jlow}, y_{jhigh}\}$. The

result looks like a tornado in profile. Draw a vertical line at $y_{baseline}$. Now you can explore the 2 or 3 or 4 x -parameters that matter most, and ignore the rest or treat them more casually, that is, with less effort to quantify or propagate their uncertainty.

Advantages and disadvantages

The tornado diagram is relatively easy to create, requiring only reasonable guesses as to the range of values of the input parameters, plus $2n+1$ evaluations of the quantity of interest, where n is the number of uncertain input parameters. It does not require absolute minima, maxima, or mean values of the input parameters. The diagram is intuitive to read. It helps the analyst identify which parameters to focus on, to spend the most time quantifying and understanding. But they do not present probabilistic information. The baseline value does not necessarily represent an expected value of the quantity of interest. The diagram gives only a general sense of the variability of the quantity of interest. In a probabilistic analysis, the quantity of interest is evaluated as an uncertain function of the jointly distributed uncertain input parameters, or at least all the important ones—the ones at the top of the tornado diagram.

Example tornado diagram problem

Let us consider an example problem. You are arranging a party for everyone in your local professional society and need to make a budget. You consider five uncertain quantities for your budget, need to budget for approximately the 90th percentile of cost, and have time to investigate only one or two to improve your budget estimate. You model your cost, Y , using Equation (84), whose variables are listed in Table 16, along with your estimates of the lower bound, best estimate, and upper bound of each quantity.

$$y = x_1 \cdot (x_2 + x_2 \cdot x_3) \cdot x_4 \cdot (1 + x_5) \quad (84)$$

Table 16. Tornado diagram example problem

Quantity	Meaning	Low	Best	High
x_1	Number of current members	1,900	2,000	2,200
x_2	Fraction who will attend	0.01	0.05	0.15
x_3	Fraction who will bring a guest	0.01	0.05	0.10
x_4	Cost per meal	\$25.00	\$50.00	\$75.00
x_5	Meals wasted to accommodate attendee choice	1%	10%	20%

Here are sample calculations of $y_{baseline}$ and y_{2low} . (This example uses the subscript “best” for best estimate rather than “typ” because in this case one does not know the typical value.)

$$\begin{aligned}
 y_{baseline} &= x_{1best} \cdot (x_{2best} + x_{2best} \cdot x_{3best}) \cdot x_{4best} \cdot (1 + x_{5best}) \\
 &= 2000 \cdot (0.05 + 0.05 \cdot 0.05) \cdot 50 \cdot (1 + 0.1) \\
 &= \$5,775.00
 \end{aligned}$$

$$\begin{aligned}
 y_{2low} &= x_{1best} \cdot (x_{2low} + x_{2low} \cdot x_{3best}) \cdot x_{4best} \cdot (1 + x_{5best}) \\
 &= 2000 \cdot (0.01 + 0.01 \cdot 0.05) \cdot 50 \cdot (1 + 0.1) \\
 &= \$1,155.00
 \end{aligned}$$

The relevant quantities are calculated in Table 17. The tornado diagram is shown in Figure 29. The table and figure show that most of the uncertainty in cost results from not knowing better what fraction of members will attend. The next most important quantity to know is the unit cost of meals. The other uncertainties hardly matter compared with these two; you might as well budget using your best-estimate values and ignore uncertainty. Don't bother checking with caterers about likely waste, making the membership committee chair figure out exactly how many members there are, or asking around about how many members will bring guests. But do go to the trouble of asking whoever organized the last meal what fraction of members attended and what each meal cost, and refine your estimate of the probability distributions of both those quantities.

Table 17. Professional society meal cost tornado diagram quantities

Uncertainty		y_{low}	y_{high}	swing
x_1	Current members	\$ 5,486	\$ 6,353	\$ 866
x_2	Fraction attending	\$ 1,155	\$ 17,325	\$ 16,170
x_3	Fraction bringing a guest	\$ 5,555	\$ 6,050	\$ 495
x_4	Cost per meal	\$ 2,888	\$ 8,663	\$ 5,775
x_5	Waste	\$ 5,303	\$ 6,300	\$ 998

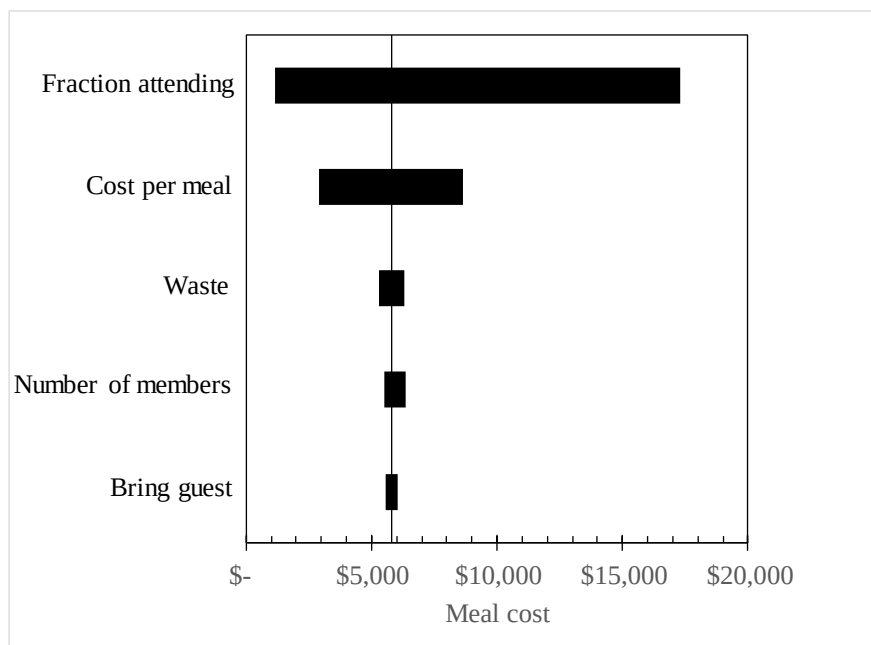


Figure 29. Tornado diagram for professional society meal

Appendix B: Assigning a monetary value to statistical injuries

The following largely quotes from Porter et al. (2006). There are a number of methodologies for estimating the value of injuries; this appendix reflects only one. The phrase “statistical injuries” is used here to indicate nonfatal or fatal injuries to unknown people at an unknown future date. This text does not deal with how to value the life of particular people in an immediate situation, such as how much is reasonable to spend on search and rescue. Nor does it deal with reasonable compensation for past injuries.

The values discussed here are commonly used to estimate the benefits of regulatory action and risk remediation. The US Department of Transportation assigned dollar values to statistical injuries avoided, based on a study by the Urban Institute (1991). These values have been used by the Federal Aviation Administration (FAA 1998) and Federal Highway Administration (FHWA 1994). The Urban Institute (1991) figures are comprehensive costs for statistical injuries, reflecting pain and lost quality of life, medical and legal costs, lost earnings, lost household production, etc. The comprehensive cost is dominated by pain and lost quality of life, which represent 60-80% of the total. Lost wages represent 5-18%, while medical costs represent a relatively small portion of the comprehensive cost, typically 5-6%.

These values can be controversial, so some discussion is warranted. The Urban Institute's (1991) comprehensive costs were not limited to highway safety. They were averaged from 49 distinct studies of the value of small changes in safety, of which only 11 had to do with automobiles. They included 30 studies of the additional wages that people demand to accept elevated safety risks; five of the market prices for products that provide additional safety (e.g., safer cars, smoke detectors, houses in less polluted areas); six of the cost of safety behavior (e.g., roadway speed choice and decisions about smoking); and eight surveys (e.g., about auto safety and fire safety).

The 49 studies produced fairly consistent values. They ranged from \$1.0 M to \$3.6 million for the value of a statistical fatality avoided. Their average was \$2.2 million; their standard deviation, \$0.6 million. The Urban Institute (1991) authors addressed the value of nonfatal injuries by multiplying the value of fatal risk reduction by the ratio of the years of lost life in a fatality versus the years of functional capacity at risk (meaning pain or impaired mobility, cognition, self care, and other measure of quality of life).

Again, these values are not arbitrary figures selected by a government agency or contractor. Nor are they values that people would demand to receive a known injury (“how much money would you take to receive a minor scalp laceration right now?”). Rather they are values of such an injury implied by what people have paid or demand to be paid for slight increases or decreases in life safety. For example, if people have been observed to pay \$100 to decrease by 1 in 10,000 their chance of death from some particular peril, the implied value of avoiding one statistical fatality would be $\$100/0.0001$, or \$1 million.

The US government's dollar values to prevent statistical injuries, as of about 2006, are shown in Table 18. They are expressed in terms of the Abbreviated Injury Severity (AIS) code, a classification system developed by the Association for the Advancement of Automotive Medicine (AAAM 2001). The AIS scale is an anatomical scoring system, in that it reflects the nature of the

injuries and resulting threat to life. It was originally developed for use in quantifying automobile-related injuries, but has been broadened to include other types and causes of injuries. The AIS dictionary (AAAM 2001) currently lists approximately 1,300 injuries, each with a distinct 7-digit numerical injury identifier. Table 18 shows a few example injuries from each AIS level.

Table 18. Federal values of statistical deaths and injuries avoided, in 1994 US\$.

AIS level	Sample injuries (drawn from AAAM 2001)	Comprehensive cost (FHWA 1994)
1 Minor	Shoulder sprain, minor scalp laceration, scalp contusion	\$5,000
2 Moderate	Knee sprain; scalp laceration > 10 cm long and into subcutaneous tissue; head injury, unconscious < 1 hr	\$40,000
3 Serious	Femur fracture, open, displaced, or comminuted; head injury, 1-6 hr unconsciousness; scalp laceration, blood loss > 20% by volume	\$150,000
4 Severe	Carotid artery laceration, blood loss > 20% by volume; Lung laceration, with blood loss > 20% by volume	\$490,000
5 Critical	Heart laceration, perforation; cervical spine cord laceration	\$1,980,000
6 Fatal	Injuries that immediately or ultimately result in death.	\$2,600,000

The comprehensive costs shown in Table 18 are not uncertain. They are not mean values with statistical distributions, but rather discrete values chosen by the agencies of the Federal government to represent the benefit associated with avoiding one such statistical injury. Note also that each AIS level 1 through 5 represents a range of injuries. Despite that, and regardless of how the reader would value any particular sample injury or how he or she imagines it would be treated, the Federal government assigns it the value shown for use in benefit-cost analysis.

For an example of how one might apply these values, see Porter et al. (2006), in which my coauthors and I quantify in monetary terms what the US federal government would have considered an acceptable cost to avoid all the deaths and injuries in the 1994 Northridge earthquake.

Appendix C: How to write and defend your thesis

This appendix tells you

- C1. One reasonable, common form of a thesis outline
- C2. Pitfalls of simplification
- C3. Basic writing style, actually a reference to a short but important work, Strunk & White
- C4. A guide to capitalization, which Strunk and White do not treat at sufficient length
- C5. How to present and defend your thesis

C.1 Your thesis outline

Find and download the university's thesis guidelines before you write anything. Write your thesis for a reader who has not studied this field, someone at the level of another graduate structural engineering student, not for your advisor, and not for other PhDs. Write your thesis as soon as you

start your literature review, starting with the outline and filling in the thesis as you do your research.

Your outline will generally be as follows:

Chapter 1. Introduction. Section 1.1 Background frames the problem to be addressed. Section 1.2 Objectives states research objectives. Section 1.3 Organization of thesis summarizes the organization of the thesis.

Chapter 2. Literature review. Identify 3-6 relevant topics. Have one subsection for each topic. In each subsection, identify and summarize 5-10 important works including the earliest on the topic, the most cited on the topic, and the ones that mark the current research boundaries on the topic.

This is important: cite the pioneers, the truly valuable works. Do not cite works just because they are easy to find, or because they were written by your advisor, or by an author from a prestigious university, or by members of some other group to whom you have some allegiance. Do not ignore works just because the author falls outside the preferred group or is a rival of yours or of someone in the preferred group. Although it is a common practice for research groups to cite each other rather than seminal authors, it is poor scholarship and may evidence intellectual dishonesty.

Write 3-6 sentences on each reference, summarizing the authors' objectives, how they went about achieving them, the novelty they introduced, and how their work relates to the present research. Cite everything as "Author (YYYY) said that..." or "A concept or assertion (Author YYYY)." Citations are always "Author (YYYY)" for one author, "Author and Author (YYYY)" for two authors, or "Author et al. (YYYY)" for three or more authors. Do not include first names or initials here. Do not write "et. al (YYYY)" or "et al (YYYY)."

Chapter 3. Proposed procedures. This section presents a general procedure to solve the problem you are addressing. It is *not* the case study. Never make an assertion that you have not already supported. Defend in depth. When choosing among procedures where there are more than one reasonable choice, explain the pros and cons of each and explain which one you chose and why. Anticipate arguments and defend your choice. You are not lecturing to willing students or to lay readers, you are arguing a position to a potentially hostile audience. Do not mix the proposed procedure with the illustration or case studies; those come in chapter 4. Make sure all quantities and events employed in this chapter pass the clarity test.

Chapter 4. Illustration or case studies. Demonstrate that the procedures are practical using a realistic and potentially useful case study. Do not assert generalities that the case study does not demonstrate. Explicitly deny any attempt to generalize where such generalizations are not supported.

Chapter 5. Findings, conclusions, limitations, and novelties. Does the procedure work? What are its most interesting findings? What general conclusions can be drawn from it? Do not draw general conclusions about a class of facilities from the case study unless the case study reasonably reflects all the important uncertainties in the class. What are the most important limitations of the research? Be as critical of your own work as possible: acknowledge its weaknesses and note any issues or

quantities that were left out of the model but that might realistically bear on the findings. Which of these might be overcome with additional research, and how might one go about performing that additional research? What novelty or innovation has the research produced? A more modest claim that is certainly supported by the research and that you have defended in depth is better than a broad one that can be reasonably attacked.

Chapter 6. References cited. Be consistent. Format as follows:

Author, A., B. Author, and C. Author, YYYY. Article title in sentence case. *Journal Title in Title Case and Italic*. volume (issue), pp-pp. <http://url> [viewed DD Mon YYYY]

Author, A., B. Author, and C. Author, YYYY. Conference paper title in sentence case. *Proc. Conference Name in Title Case and Italic*, City, DD-DD Mon YYYY, pp-pp. <http://url> [viewed DD Mon YYYY]

Author, A., B. Author, C. Author, and D Author, YYYY. *Book Title in Title Case and Italic*. Publisher Name, Nearest city of publication, pp.

Everything you write during your research that is not intended for a journal article or conference paper should be in the style required for the thesis and should be intended to fit somewhere in your outline.

C.2 Simplify as much as possible but no more

To paraphrase a quote attributed to Albert Einstein, everything should be made as simple as possible, but no simpler. Two parables illustrate two common shortcomings of doctoral dissertations:

Avoid the streetlight effect. This is summarized by the following parable (taken from Wikipedia): A policeman sees a drunk man searching for something under a streetlight and asks what the drunk has lost. He says he lost his house keys and they both look under the streetlight together. After a few minutes the policeman asks if he is sure he lost them here, and the drunk replies, no, he lost them in the park. The policeman asks why he is searching here. The drunk replies, “This is where the light is.” A 1942 Mutt and Jeff cartoon tells the same story.

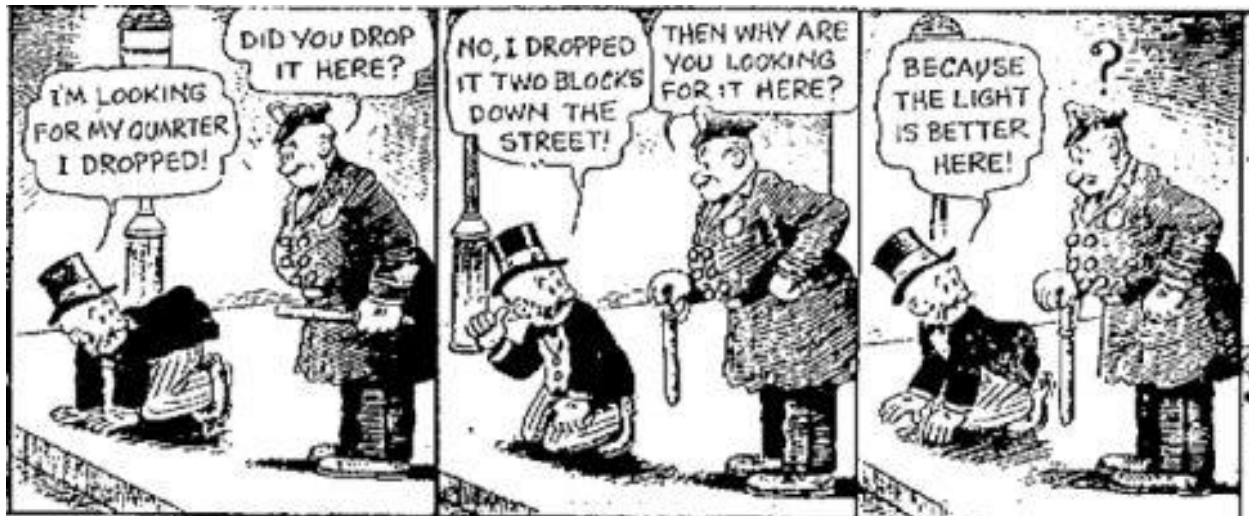


Figure 30. Avoid streetlight-effect simplifications (Fisher 1942)

Avoid spherical-cow simplifications. This is summarized by the following parable (modified from Wikipedia's article): Milk production at a dairy farm was low, so the farmer wrote to the local university, asking for help from academia. A multidisciplinary team of professors was assembled, headed by a theoretical physicist, and two weeks of intensive on-site investigation took place. The scholars then returned to the university, notebooks crammed with data, where the task of writing the report was left to the team leader. Shortly thereafter the physicist returned to the farm, saying to the farmer "I have the solution. First, we idealize the farm as consisting of spherical cows with 1-meter radius in an unbounded vacuum...." (That's the punch line.) The point is that real-world realities are almost certainly omitted from the physicist's model that bear far more on the quantity of interest—milk-production—than any of the quantities that remain in the model, which are most likely selected because those are the ones a physicist is comfortable addressing. Do not be that physicist.

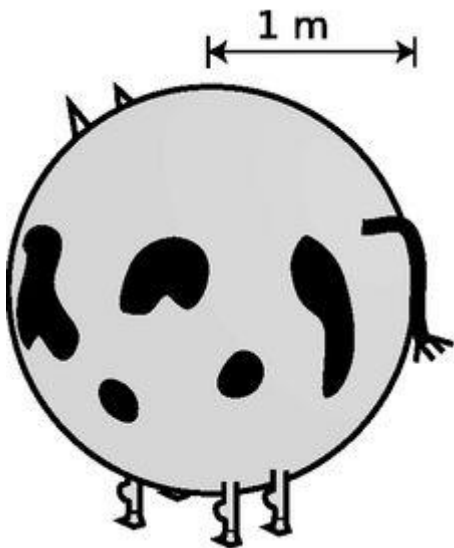


Figure 31. Avoid spherical-cow simplifications

C.3 Style guide

Have a peer proofread your thesis before you submit it. If English is your second language, please get a native English-speaker to review and correct your writing, preferably early and often. The peer should be someone with your level of education but no experience in the thesis topic. If the proofreader does not understand completely what you have done, why, how, what you found, and what is novel about it, your thesis is not clear enough. Practice distilling the what, why, how, findings, and novelties into a few words, enough that you can speak them in 60 seconds or less. That will be your abstract. If you speak your abstract to a peer and the peer cannot repeat it back essentially correctly, your abstract is not clear enough.

Read Strunk and White's *Elements of Style*. The University of Colorado Library offers online access to the *Chicago Manual of Style*. Find it and be prepared to use it while writing your thesis.

In text, active voice. 1st person when you are an important part of the story, as in "I made the choice among the available ones," and use 3rd person otherwise, as in "The fragility function reflects damage to component X." To the extent possible, remove yourself from the narrative: keep the focus on the observations, concepts, and conclusions.

In your literature review, never denigrate the prior work of others. Focus on what they added to the field. If you are a good scholar, your contribution will further expand knowledge, building on prior work, not correcting what you perceive as shortcomings in prior work. All prior work is limited. Its importance lies in what it added, not where it stopped.

It is okay to name alternative labels for technical terms when they are first introduced, but afterwards always use the same technical term, and where you are building on my work or that of someone else, use the same term as me or them unless there is a strong reason to change.

Charts:

1. Don't use Excel's defaults for anything, they look sloppy in many ways.
2. Font: all Times New Roman or Baskerville 24 pt. Use the same font in your thesis text.
3. Include a horizontal x-axis label, vertical rotated y-axis label, and show units
4. Include axis tick marks: major ticks cross the line, minor ticks inside
5. Exclude gridlines unless they clearly provide value
6. Make all axis lines and tick marks black
7. Make the plot area border black (the area bounded by the min & max x and y values)
8. Do not include any chart border (the area around the entire chart)
9. Include units in axis labels
10. Use consistent and sensible number formats. For example, on the vertical axis that is bounded by 0.0 and 1.0, have major units of 0.25 and minor units of 0.05. In such a case, used fixed 0.00 format.
11. If you are providing multiple charts show similar information, have the same min and max x and y values.
12. Make all text & lines monochrome (black and white) unless color is absolutely needed.
13. If you need color and you have multiple series and there is an order to the series, then make the color scale intuitive and consistent (cold to hot colors, etc.).

14. If you can avoid color, and you have multiple series, and there is an order to the series, use intuitive line styles. For example, ordered from dotted line to dashed line to solid line to thick solid line.

Miscellaneous common stylistic errors:

1. Know the difference between i.e. (which means “that is”) and e.g. (“for example”).
2. Watch noun-verb agreement (e.g., “a building collapses,” versus “two or more buildings collapse”).

C.4 Capitalization

This appendix recaps what the Chicago Manual of Style (CMS) says about capitalization. Heading numbers are from CMS.

5.5 Common nouns

A common noun is the generic name of one item in a class or group {a chemical} {a river} {a pineapple}.⁵ It is not capitalized unless it begins a sentence or appears in a title. Common nouns are often broken down into three subcategories: concrete nouns, abstract nouns, and collective nouns. A concrete noun denotes something solid or real, something perceptible to the physical senses {a building} {the wind} {honey}. An abstract noun denotes something you cannot see, feel, taste, hear, or smell {joy} {expectation} {neurosis}. A collective noun—which can be viewed as a concrete noun but is often separately categorized—refers to a group or collection of people or things {a crowd of people} {a flock of birds} {a committee}.

5.6 Proper nouns

A proper noun is the specific name of a person, place, or thing {John Doe} {Moscow} {the Hope Diamond}, or the title of a work {Citizen Kane}. A proper noun is always capitalized, regardless of how it is used. A common noun may become a proper noun {Old Hickory} {the Big Easy}, and sometimes a proper noun may be used figuratively and informally, as if it were a common noun {like Moriarty, he is a Napoleon of crime} (Napoleon here connoting an ingenious mastermind who is ambitious beyond limits). Proper nouns may be compounded when used as a unit to name something {the Waldorf-Astoria Hotel} {Saturday Evening Post}. Over time, some proper nouns (called eponyms) have developed common-noun counterparts, such as sandwich (from the Earl of Sandwich) and china (from China, where fine porcelain was produced).

7.48 Capitals for emphasis

Initial capitals, once used to lend importance to certain words, are now used only ironically (but see 8.93).

“OK, so I’m a Bad Mother,” admitted Mary cheerfully.

8.1 Chicago’s preference for the “down” style

Proper nouns are usually capitalized, as are some of the terms derived from or associated with proper nouns. For the latter, Chicago's preference is for sparing use of capitals—what is sometimes referred to as a “down” style. Although Brussels (the Belgian city) is capitalized, Chicago prefers brussels sprouts—which are not necessarily from Brussels (see 8.60). Likewise, President Obama is capitalized, but the president is not (see 8.18–32). (In certain nonacademic contexts—e.g., a press release—such terms as president may be capitalized.)

8.3 Personal names—additional resources

For names of well-known deceased persons, Chicago generally prefers the spellings in Merriam-Webster's Biographical Dictionary or the biographical section of Merriam-Webster's Collegiate Dictionary (referred to below as Webster's). For living persons, consult Who's Who or Who's Who in America, among other sources. (See bibliog. 4.1 for these and other useful reference works.) Where different spellings appear in different sources (e.g., W. E. B. DuBois versus W. E. B. Du Bois), the writer or editor must make a choice and stick with it. The names of known and lesser-known persons not in the standard references can usually be checked and cross-checked at any number of officially sponsored online resources (e.g., for authors' names, online library catalogs or booksellers). The name of a living person should, wherever possible, correspond to that person's own usage.

8.5 Names with particles

Many names include particles such as de, d', de la, von, van, and ten. Practice with regard to capitalizing and spacing the particles varies widely, and confirmation should be sought in a biographical dictionary or other authoritative source. When the surname is used alone, the particle is usually retained, capitalized or lowercased and spaced as in the full name (though always capitalized when beginning a sentence). Le, La, and L' are always capitalized when not preceded by de; the, which sometimes appears with the English form of a Native American name, is always lowercased. See also 8.7, 8.8, 8.9, 8.10, 8.11, 8.14, 8.33.

Alfonse D'Amato; D'Amato
Diana DeGette; DeGette
Walter de la Mare; de la Mare
Paul de Man; de Man

8.7 French names

The particles de and d' are lowercased (except at the beginning of a sentence). When the last name is used alone, de (but not d') is often dropped. Its occasional retention, in de Gaulle, for example, is suggested by tradition rather than logic. (When a name begins with closed-up de, such as Debussy, the d is always capitalized.)

Jean d'Alembert; d'Alembert
Alfred de Musset; Musset
Alexis de Tocqueville; Tocqueville
but

Charles de Gaulle; de Gaulle

When de la precedes a name, la is usually capitalized and is always retained when the last name is used alone. The contraction du is usually lowercased in a full name but is retained and capitalized when the last name is used alone. (When a name begins with closed-up Du, such as Dupont, the d is always capitalized.)

Jean de La Fontaine; La Fontaine

René-Robert Cavelier de La Salle; La Salle

Philippe du Puy de Clinchamps; Du Puy de Clinchamps

When the article le accompanies a name, it is capitalized with or without the first name.

Gustave Le Bon; Le Bon

Initials standing for a hyphenated given name should also be hyphenated.

Jean-Paul Sartre; J.-P. Sartre; Sartre

Since there is considerable variation in French usage, the guidelines and examples above merely represent the most common forms.

8.25 Religious titles

Religious titles are treated much like civil and military titles (see 8.21, 8.23).

the rabbi; Rabbi Avraham Yitzhak ha-Kohen Kuk; the rabbinate

the cantor or hazzan; Deborah Bard, cantor; Cantor Bard

the sheikh; Sheikh Ibrahim el-Zak Zaky

the imam; Imam Shamil

8.31 Titles of nobility

Unlike most of the titles mentioned in the previous paragraphs, titles of nobility do not denote offices (such as that of a president or an admiral). Whether inherited or conferred, they form an integral and, with rare exceptions, permanent part of a person's name and are therefore usually capitalized. The generic element in a title, however (duke, earl, etc.), is lowercased when used alone as a short form of the name. (In British usage, the generic term used alone remains capitalized in the case of royal dukes but not in the case of nonroyal dukes; in North American usage such niceties may be disregarded.) For further advice consult *The Times Style and Usage Guide* (bibliog. 1.1), and for a comprehensive listing consult the latest edition of *Burke's Peerage, Baronetage, and Knightage* (bibliog. 4.1). See also 8.22.

the prince; Prince Charles; the Prince of Wales

the duke; the duchess; the Duke and Duchess of Windsor

the marquess; the Marquess of Bath; Lord Bath

the marchioness; the Marchioness of Bath; Lady Bath

8.59 When to capitalize

Adjectives derived from personal names are normally capitalized. Those in common use may be found in Webster's, sometimes in the biographical names section (e.g., Aristotelian, Jamesian, Machiavellian, Shakespearean). If not in the dictionary, adjectives can sometimes be coined by adding *ian* (to a name ending in a consonant) or *an* (to a name ending in *e* or *i*)—or, failing these, *esque*. As with Foucault and Shaw, the final consonant sometimes undergoes a transformation as an aid to pronunciation. If a name does not seem to lend itself to any such coinage, it is best avoided. See also 8.60, 8.78.

Baudelaire; Baudelairean
Bayes; Bayesian
Dickens; Dickensian
Foucault; Foucauldian
Jordan; Jordanesque (à la Michael Jordan)

8.67 Institutions and companies—capitalization

The full names of institutions, groups, and companies and the names of their departments, and often the shortened forms of such names (e.g., the Art Institute), are capitalized. At the preceding a name, even when part of the official title, is lowercased in running text. Such generic terms as company and university are usually lowercased when used alone (though they are routinely capitalized in promotional materials, business documents, and the like).

the University of Chicago; the university; the University of Chicago and Harvard University;
Northwestern and Princeton Universities; the University of Wisconsin–Madison
the Department of History; the department; the Law School
the University of Chicago Press; the press

8.68 Names with unusual capitalization

Parts of names given in full capitals on the letterhead or in the promotional materials of particular organizations may be given in upper- and lowercase when referred to in other contexts (e.g., “the Rand Corporation” rather than “the RAND Corporation”). Company names that are spelled in lowercase letters in promotional materials may be capitalized (e.g., DrKoop.net rather than drkoop.net). Names like eBay and iPod, should they appear at the beginning of a sentence or heading, need not take an initial capital in addition to the capitalized second letter. See also 8.153

8.84 Academic subjects

Academic subjects are not capitalized unless they form part of a department name or an official course name or are themselves proper nouns (e.g., English, Latin).

She has published widely in the history of religions.
They have introduced a course in gender studies.
He is majoring in comparative literature.
She is pursuing graduate studies in philosophy of science.
but

Jones is chair of the Committee on Comparative Literature.

8.93 Platonic ideas

Words for transcendent ideas in the Platonic sense, especially when used in a religious context, are often capitalized. See also 7.48.

Good; Beauty; Truth; the One

8.153 Names like eBay and iPod

Brand names or names of companies that are spelled with a lowercase initial letter followed by a capital letter (eBay, iPod, iPhone, etc.) need not be capitalized at the beginning of a sentence or heading, though some editors may prefer to reword. This departure from Chicago's former usage recognizes not only the preferred usage of the owners of most such names but also the fact that such spellings are already capitalized (if only on the second letter). Company or product names with additional, internal capitals (sometimes called "midcaps") should likewise be left unchanged (GlaxoSmithKline, HarperCollins, LexisNexis). See also 8.4.

eBay posted strong earnings.

User interfaces varied. iTunes and its chief rival, Amazon.com, . . .

In text that is set in all capitals, such distinctions are usually overridden (e.g., EBAY, IPOD, HARPERCOLLINS); with a mix of capitals and small capitals, they are preserved (e.g., EBAY).

10.20 Academic degrees

Chicago recommends omitting periods in abbreviations of academic degrees (BA, DDS, etc.) unless they are required for reasons of tradition or consistency with, for example, a journal's established style. In the following list of some of the more common degrees, periods are shown only where uncertainty might arise as to their placement. Spelled-out terms, often capitalized in institutional settings (and on business cards and other promotional items), should be lowercased in normal prose. See also 8.28.

AB

artium baccalaureus (bachelor of arts)

AM

artium magister (master of arts)

BA

bachelor of arts

BD

bachelor of divinity

BFA

bachelor of fine arts

BM

bachelor of music
BS
bachelor of science

C.5 Defending your thesis

Here are some preparation hints for defending your thesis.

- (1) Try to explain your research frequently to your mother, father, impatient siblings, and to children ages 12 to 18. If you can explain it to them, you know it. If you cannot, you don't.
- (2) Try summarizing your thesis in 3 minutes in a bar or café to a non-engineer. If you can do that and the other person understands what your thesis is about, then you understand what your thesis is about. If not, you don't.
- (3) Organize your presentation in the same order as your thesis. Often this will be: introduction, problem statement, objectives, organization of the presentation, literature review, proposed methodology, findings, conclusions.
- (4) Organize your presentation so that you present facts and only afterwards present conclusions that follow from those facts. Do not make assertions for which you have not already presented the evidence.
- (5) Near the end, have a slide on the weaknesses of your research. Your committee will think of many of them and possibly others. Thinking in advance about weaknesses will help you eliminate some.
- (6) Know what is new about your thesis and what is not. Have a slide on that point after the weaknesses slide.
- (7) When you don't know the answer to a committee member's question, say "I don't know" and then stop talking. I cannot not help you answer questions from another committee member without defeating the purpose of the exam.
- (8) Practice your defense with colleagues. Your objective is to teach them, not impress them. It is okay to use technical terms of art, but only after you have explained them in plain English, and only if the term of art is much more concise than plain English. Your colleagues should leave the practice defense knowing how to repeat your research, what it was for, and what novelty you introduced.

Appendix D: How to write a research article

This appendix is borrowed from University of Colorado Boulder Professor Wil Srubar III, with trivial modifications. Thanks, Wil.

Step 1. Define the scope of work. Start by writing down the objective of the study. The objective should be (a) specific, (b) novel, and (c) relevant to the broad scientific community. What questions are you answering? Why does the questions matter? What do others in the literature have to say about this question? Are you furthering their work? How and why are you doing that? What materials are used and what methods are employed to answer your questions? The materials and methods must directly support answering your main questions. If they do not support answering your main questions, then they should not be included in the scope of work. We will be constantly refining these each week during your individual meetings with me.

In our university, we perform *experimental* and *computational* studies. This means that, for those performing experiments, we use physical samples made in the lab to investigate the effect of independent variables on dependent variables. Examples of this: the effect of time, acid exposure, or molecular weight (which we control) on mechanical properties (a property of interest). In *computational* studies, we use virtual samples made by computers to investigate the effect of independent variables on properties of interest. Examples of this: the effect of geographic location (which we control) on the energy performance (a property of interest) for commercial buildings with transparent wood-composite windows.

Action: Once the scope of work has been defined, talk to me to ensure your experimental design effectively and efficiently answers the questions of interest.

Step 2. Consider co-authorship. The list of co-authors will most likely include your primary research advisor and any other person that has made some “intellectual contribution” to the study. For example: (1) a fellow student who designs and runs a supporting experiment; (2) another faculty member who helps you decipher or analyze some complicated data that is pertinent to your conclusions; or (3) someone who helps organize and write significant parts of the manuscript – all should be included as co-authors.

Someone who gives you minor feedback or trains you on a piece of equipment (without designing experiments or analyzing results pertinent to your study) does not merit inclusion as a co-author. However, these critical supporting actors should be gratefully acknowledged in the *Acknowledgments* section of the manuscript. I prefer acknowledgments, not acknowledgements.

Step 3. Specify co-authorship contributions. Once the list of co-authors is identified, it is imperative to concur with all parties the order of authors. Start with me; I may give you some guidance on the proper order – there may be particular customs in your field (for example, the Principal Investigator should be listed last). Generally, those with the most involvement are listed first, beginning with the author contributing most of the work (which is likely *you*—meaning that you will probably be first author, and I will probably, though not necessarily, be second). It is critical to get consensus on who is going to contribute and what they are contributing before the first drafts of the manuscript. This proactive preparation will save you from potentially stressful situations in the long run.

Action: Once co-authorship is considered, check with me about your co-authorship plans and expected contributions. This will help determine the appropriate author order.

Step 4. Identify a target journal and download its *Guide for Authors*. This selection is often made in consultation with your advisor. Journals with high impact factors (which is a measure of quality of the journal) are typically preferred. However, not all research is of the right caliber for some journals. Self-awareness of where your research fits into the field is key here, and a compromise must be struck with quality of the research with quality of the anticipated journals. In some instances, other metrics of the journal may be more important than impact factor (e.g., review speed). Read through the Guide for Authors, noting any special instructions for the journal (e.g., Graphical Abstract, Reference Format, Number of Figures, Font Size and Spacing). Take a look at 2-3 current papers that were published in that journal to get an idea of the expected writing style, length, sections, etc. Some journals in which we have published: *Earthquake Spectra*, *Natural Hazards*, *ASCE Structural Journal*, and *Seismological Research Letters*. For most studies, it is useful to have a reach journal (a high-impact-factor journal that you hope you can get into, e.g., *Earthquake Spectra*), a match journal (a good-impact-factor journal that you think is most suited for your work), and a safety journal (one that you know you can get into if your manuscript is declined for review in your reach and match journals).

Action: After you have made a shortlist, consult with me to discuss what journal would be a good fit for your particular study.

Step 5. Sketch out your illustrations, figures, and tables. What data are you collecting and what will be included in the figures and tables? What general trends are you anticipating (i.e., what is your hypothesis/hypotheses)? Write drafts of captions for your figures and tables. In general, journal articles should have anywhere from 1-5 tables and 3-10 figures, depending on the journal's Guide for Authors. Once the data is collected, format your figures and rewrite the text of any captions.

Action: Submit a draft of your outline, complete with figure captions, to me for initial feedback.

Step 6. Draft an outline of the journal article according to the Guide for Authors. In general, articles should have a Title, Authors (names and affiliation), Abstract, Keywords, Introduction, Materials and Methods, Results and Discussion, Conclusion, and Reference sections. Include headings and subheadings for each section. Include a topic sentence for each paragraph you intend to write. Topic sentences should encapsulate the main idea discussed in the paragraph. The reader should understand your main point discussed in the paragraph by reading the topic sentence. The succeeding sentences should only support the topic sentence of the paragraph.

Action: Submit another draft of your outline to me for review.

Step 7. Complete a full draft. Once the outline and topic sentences are agreed upon, the lead author should complete the full draft of the text, involving for clarification/contribution. Once the full text has been drafted, the lead author circulates the draft and obtains reviews and suggested edits from all co-authors on a publication. It helps to have a systematic hand-off process – for example, “John will review while tracking changes and submit to Jill. Jill will review and submit to Jack. Once reviewed, Jack will send the manuscript with all comments back to me.” Deadlines for each of the mini-reviews will help. It may also help to call a group meeting if the list of authors is long.

Action: Submit a full draft to me for review and start circulating to other co-authors for edits.

Step 8. Repeat the editing process. Once the edits are addressed, send another version of the manuscript out to the authors in a similar round-robin fashion. Much iteration may be necessary before all authors are in consensus. Only until everyone signs off on the manuscript are we able to submit it to the journal for peer-review.

Action: Finish all edits until all authors are satisfied with the manuscript, then it is ready for journal submission. Send to me for submission, along with any supporting information needed by the journal (i.e., cover letter). I will be designated corresponding author on all submissions, unless we decide otherwise.

Style Guidelines

1. I cannot stress this enough – begin each paragraph with a **strong** topic sentence. Each subsequent sentence in that paragraph should support the topic sentence. If it doesn't, you need a better topic sentence, or that particular point does not belong in the paragraph. This rule is also true of slide titles and data on each slide in presentations!
2. Spell out all numbers at the beginning of sentences, and always spell out numbers 0-9. You may use numeric characters for other numbers (i.e., 10, 25, 105). Always hyphenate numbers past 20 if it begins a sentence (i.e., Twenty-one).
3. Careful of your use of adverbs – let the data speak for itself. Example: Sample A exhibited a ~~significantly~~ higher elastic modulus. Your technical writing will be stronger.
4. I am a fan of the Oxford comma, so please use it in all of your written reports, articles, and book chapters. I use it here, there, and everywhere. (See my examples?)
5. I prefer that text of manuscripts be written in Times New Roman, subheadings be written in *Times New Roman Italics* (i.e., 1.1 *Materials*), and titles and main headings (i.e., 1.0 Introduction, 2.0 Materials and Methods) be written in **Arial Bold**. I have a template for you to follow, so please ask me for it.
6. If a format for including references in the text is not given by the author guide, I prefer that references be referenced in numerical [1] order.

Appendix E: Revision history

Rev	Date	Comments
1	19 Jun 2013	Initial draft
2	26 Jun 2013	Change to outline form. Add thm of tot probability & PSHA. Add exercise “basic elements of earthquake rupture forecast.” Add multiple fragility functions. Change some ASCII equations to standard math notation.
3	26 Jun 2013	Rest of MathType
4	17 Jul 2013	Add to style guide
5	28 Jul 2013	Flesh out risk integral. Definite component type and sites in exercises.
6	30 Jul 2013	Remove ref to normal fragility function in Ex 4 “know the lognormal” Add section on measures of seismic excitation Correct misc typos Add section on GMICE and IGMCE.
7	14 Aug 2013	Misc edits: fix refs in Exercise 1, discuss notation for uncertainty quantities just before on the meaning of D in Sec 1. Add exercise to test reader’s understanding of the theorem of total probability.
8	13 Sep 2013	Misc edits.
9	17 Sep 2013	Add sec on how to derive fragility functions, add TOC, add section on defending your thesis.
10	2 Oct 2013	Fix equations for probability of 1 or 2 simultaneous damage states
11	18 Oct 2013	Edit MECE damage state problem to be less confusing
12	24 Oct 2013	Add hazard deaggregation section and text on how to deal with underrepresentative samples. Add placeholders for a section on vulnerability functions and initial text for a section on risk in terms of degree of loss.
13	7 Nov 2013	Improve transitions between sections
14	11 Nov 2013	Streetlight effect and spherical cows
15	18 Nov 2013	Add short section on convenient sources for hazard data
16	27 Feb 2014	Fix typo in hazard deaggregation exercise
17	28 Apr 2014	Reorganize (intro, fragility, vulnerability, hazard, risk, exercises, refs, appendices). Edit for brevity & to use 3 rd person. Move revision history to appendix.
18	30 Apr 2014	Delete the words trapezoidal rule from exercise 7, equation for component failure rate.
19	2 Oct 2014	Fix typos
20	16 Oct 2014	Reorganize appendices, add appendix C, tornado diagram analysis
21	31 Oct 2014	Add Mutt & Jeff cartoon to illustrate streetlight effect and add figure with hazard curve and fragility function to illustrate failure rate
22	16 Nov 2014	Add stub of appendix D on assigning value to human life
23	10 Dec 2014	Move and expand on probability distributions, with equations and figures for N, LN, and U; add 2 definitions of fragility function; enhance instructions on clarity in the style guide; discuss advantages and disadvantages of tornado diagram.
24	29 May 2015	3 methods for deriving vulnerability functions. History of tornado diagrams. Aleatory and epistemic uncertainty. More about the lognormal.
25	30 May 2015	More lognormal
26	31 May 2015	Add the clarity test
27	5 Jun 2015	Begin portfolio risk analysis. Caution about ill-defined damage states.
28	3 Sep 2015	Add “three general classes of fragility functions”
29	5 Sep 2015	Add illustrative risk curves & start section on common single-site risk software. Expand on single-site EAL.

Rev	Date	Comments
30	7 Sep 2015	Add Keller coin-toss illustration, Diaconis et al. coin-toss device, and elevator illustration of the clarity test
31	23 Dec 2015	Minor edits
32	11 Feb 2016	Minor edits; thanks Luis Esquivel, Universidad de Costa Rica
33	11b Feb 2016	Add text and exercise for a risk curve for binomially distributed loss measure
34	22 Feb 2016	Add section on risk curve for discrete damage count and large N
35	28 Feb 2016	Add section 6.1, a brief summary of portfolio risk analysis, adapted from the HayWired levee damage scenario.
36	10 Mar 2016	Add example problem with sample calcs for tornado diagram
37	13 Jun 2016	Correct errors in discussion of lognormal. Thanks, Stoyan Andreev.
38	15 Aug 2016	Typos; more on aleatory vs. epistemic more; fix misstatements about LN
39	11 Nov 2016	Expand appendix C.1 Your thesis outline.
40	12 Feb 2017	New intro section summarizing an engineering approach to risk analysis
41	15 May 2017	New appendix D on how to write a research article
42	13 Jun 2017	New chapter 8 for mathematical tools, with sec 8.2 on moment matching
43	15 Jul 2017	Minor edit to appendix A, language of independent and dependent variables
44	6 Sep 2017	New section of dealing with fragility functions that cross

End