
NOTES:

- 1. POLYPROLYLENE LINER MINIMUM 750 MICRON. ALL JOINTS TO BE FUSION WELDED.
- 2. ATLANTIS FLO DUCTS TO HAVE A MIN SPACING OF 25 mm.
- 3. DRAWING TO BE READ IN CONJUNCTION WITH 480,481,483 AND DESIGN SPECIFICATIONS AND CONTRACT DOCUMENT .
- 4. HUMIDIFIER NOZZLE TO BE ULTIMIST 1/4" INCH 416 SS MISTING NOZZLE,MEDIUM ANGLE.
- 5. SINAGE IN ISOLATION MH TO BE WHITE TRAFFOLYTE FIXED TO INSIDE OF MH,TEXT BLACK 25mm.
- 6. ALL VALVES TO BE CLOCKWISE CLOSING.

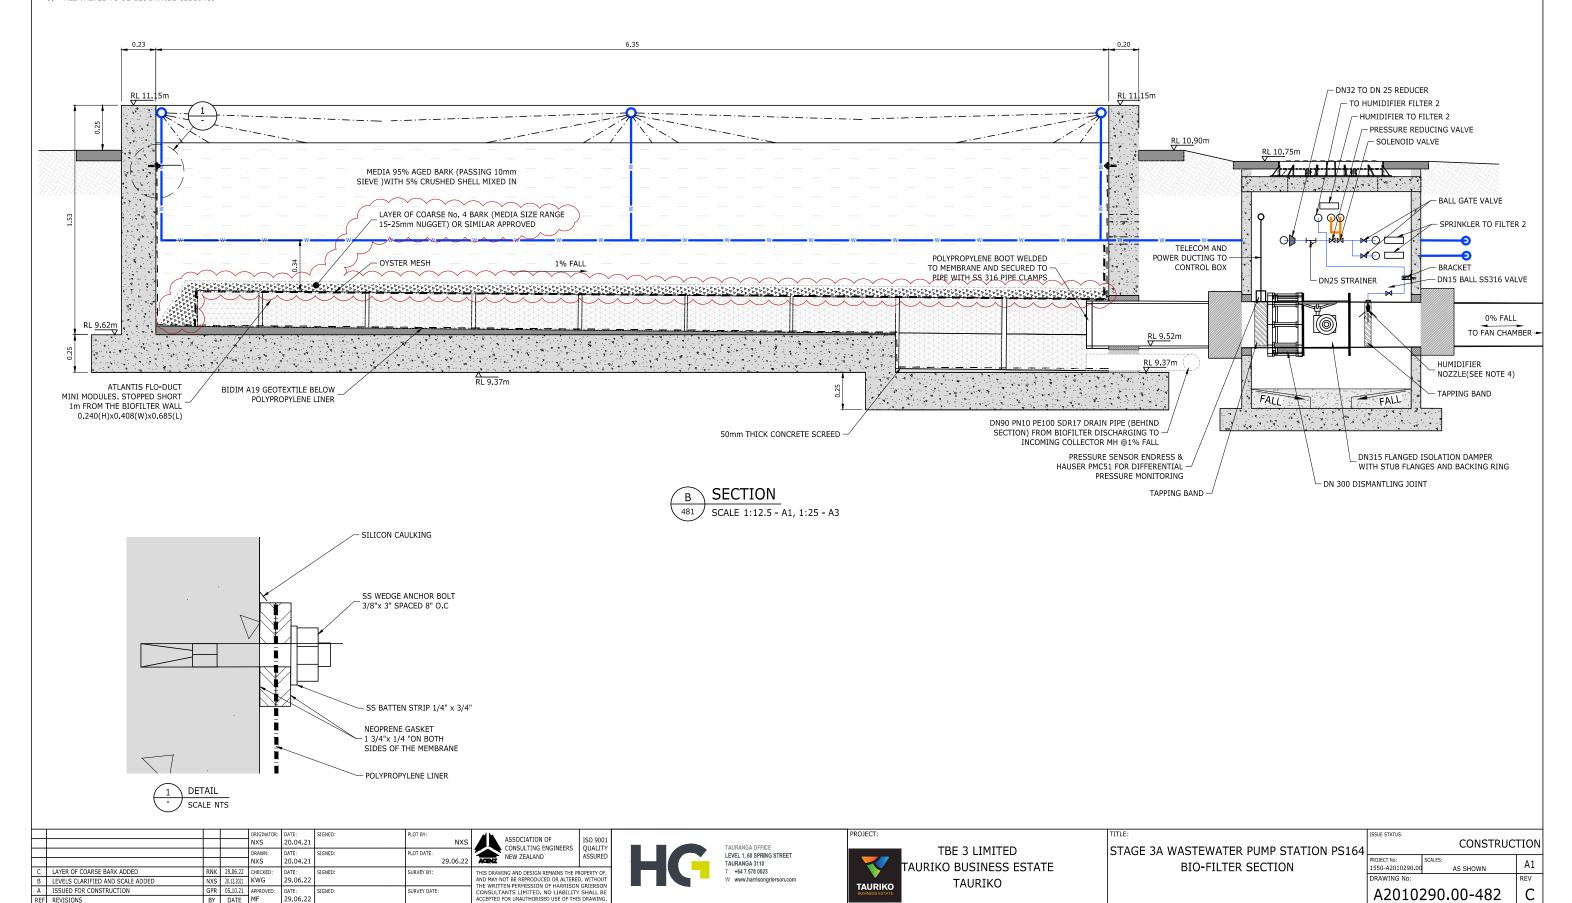

REFER TO APPROVED MASTER DRAWINGS FOR ORIGINAL SIGNATURES FILE: TAURANGA N:\1550\A2010290_A TBE 3A WWPS DESIGN\CAD\SUPERSEDEI