



BEAM DIAGRAMS AND FORMULAS For Various Static Loading Conditions, AISC ASD 8th ed.

1. SIMPLE BEAM—UNIFORMLY DISTRIBUTED LOAD

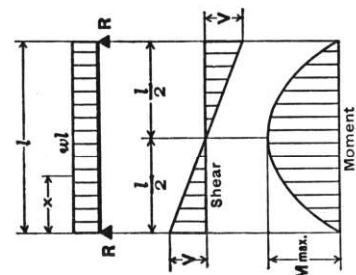


Total Equiv. Uniform Load wl
 $R = V$ $\frac{wl}{2}$
 V_x 0
 $M \max. \left(\text{at center} \right)$ $w \left(\frac{l}{2} - x \right)$
 M_x $\frac{wx}{2} (l-x)$
 $\Delta \max. \left(\text{at center} \right)$ $\frac{5w^3 l^4}{384 EI}$
 Δx $\frac{wx}{24EI} (l^3 - 2lx^2 + x^3)$

4. SIMPLE BEAM—UNIFORM LOAD PARTIALLY DISTRIBUTED

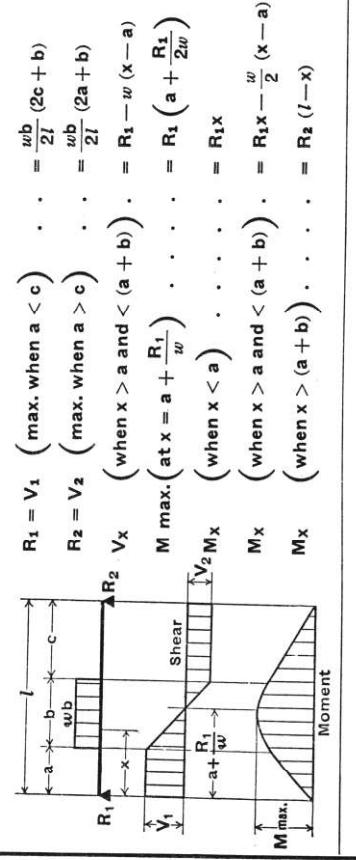


Total Equiv. Uniform Load $\frac{16W}{9\sqrt{3}} = 1.0264W$
 $R_1 = V_1$ $\frac{W}{3}$
 $R_2 = V_2$ max. $\frac{2W}{3}$
 V_x $\frac{W}{3} - \frac{Wx^2}{l^2}$
 $M \max. \left(\text{at } x = \frac{l}{\sqrt{3}} = .5774l \right)$ $\frac{2WI}{9\sqrt{3}} = .1283 WI$
 M_x $\frac{Wx}{3l^2} (l^2 - x^2)$
 $\Delta \max. \left(\text{at } x = l \sqrt{1 - \frac{8}{15}} = .5193l \right)$ $.01304 \frac{Wl^3}{EI}$
 Δx $\frac{Wx}{180EI l^2} (3x^4 - 10x^2 + 7l^4)$

2. SIMPLE BEAM—LOAD INCREASING UNIFORMLY TO ONE END

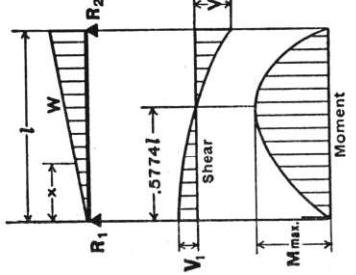


Total Equiv. Uniform Load $\frac{16W}{9\sqrt{3}} = 1.0264W$
 $R_1 = V_1$ $\frac{W}{3}$
 $R_2 = V_2$ max. $\frac{2W}{3}$
 V_x $\frac{W}{3} - \frac{Wx^2}{l^2}$
 $M \max. \left(\text{at } x = \frac{l}{\sqrt{3}} = .5774l \right)$ $\frac{2WI}{9\sqrt{3}} = .1283 WI$
 M_x $\frac{Wx}{3l^2} (l^2 - x^2)$
 $\Delta \max. \left(\text{at } x = l \sqrt{1 - \frac{8}{15}} = .5193l \right)$ $.01304 \frac{Wl^3}{EI}$
 Δx $\frac{Wx}{180EI l^2} (3x^4 - 10x^2 + 7l^4)$

5. SIMPLE BEAM—UNIFORM LOAD PARTIALLY DISTRIBUTED AT ONE END

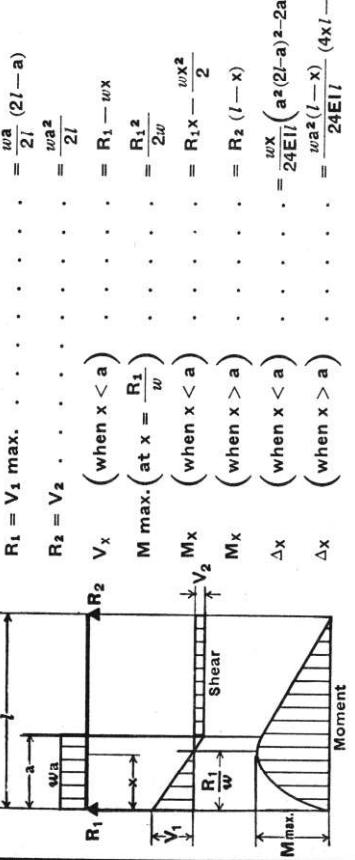

Total Equiv. Uniform Load $\frac{16W}{9\sqrt{3}} = 1.0264W$
 $R_1 = V_1$ $\frac{W}{3}$
 $R_2 = V_2$ max. $\frac{2W}{3}$
 V_x $\frac{W}{3} - \frac{Wx^2}{l^2}$
 $M \max. \left(\text{at } x = \frac{l}{\sqrt{3}} = .5774l \right)$ $\frac{2WI}{9\sqrt{3}} = .1283 WI$
 M_x $\frac{Wx}{3l^2} (l^2 - x^2)$
 $\Delta \max. \left(\text{at } x = l \sqrt{1 - \frac{8}{15}} = .5193l \right)$ $.01304 \frac{Wl^3}{EI}$
 Δx $\frac{Wx}{180EI l^2} (3x^4 - 10x^2 + 7l^4)$


3. SIMPLE BEAM—LOAD INCREASING UNIFORMLY TO CENTER

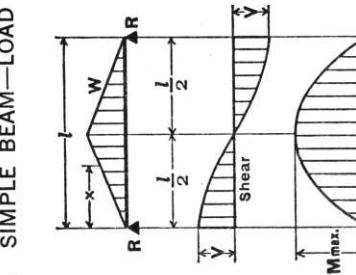

Total Equiv. Uniform Load $\frac{4W}{3}$
 $R = V$ $\frac{W}{2}$
 V_x (when $x < \frac{l}{2}$) $W \left(\frac{1}{2} - \frac{2x^2}{3l^2} \right)$
 $M \max. \left(\text{at center} \right)$ $\frac{WI}{6}$
 M_x (when $x < \frac{l}{2}$) $Wx \left(\frac{1}{2} - \frac{2x^2}{3l^2} \right)$
 $\Delta \max. \left(\text{at center} \right)$ $\frac{Wl^3}{60EI}$
 Δx (when $x < \frac{l}{2}$) $\frac{Wx}{480EI l^2} (5l^2 - 4x^2)^2$

$R_1 = V_1$ $\frac{w_1 a}{2l}$
 $R_2 = V_2$ $\frac{w_2 a}{2l}$
 V_x (when $x < a$) $w_1 a$
 $M \max. \left(\text{at } x = l - \frac{R_2}{w_2} \text{ when } R_2 < w_1 a \right)$ $\frac{R_1^2}{2w_1}$
 M_x (when $x < a$) $w_1 a$
 M_x (when $x > a$) $R_1 x - \frac{w_1 a^2}{2}$
 M_x (when $x > a$) $R_1 x - \frac{w_1 a^2}{2}$


7. SIMPLE BEAM—CONCENTRATED LOAD AT CENTER

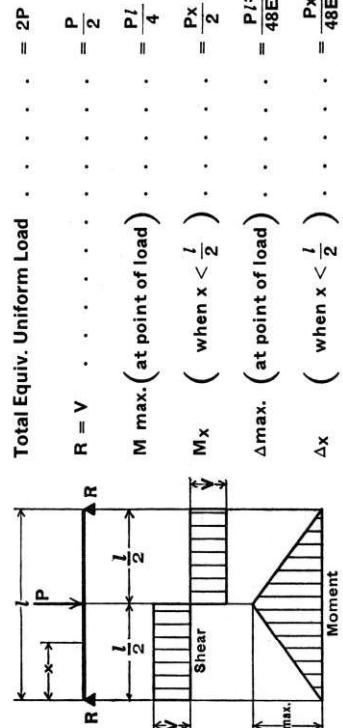

ANSWER

$$\begin{aligned} \text{Total Equiv. Uniform Load} &= 2P \\ R &= V \\ M_{\max.} (\text{at point of load}) &= \frac{P}{2} \\ M_x &= \left(\text{when } x < \frac{l}{2} \right) \frac{Px}{2} \\ \Delta \text{max.} (\text{at point of load}) &= \frac{Pl^3}{48EI} \\ \Delta x &= \left(\text{when } x < \frac{l}{2} \right) \frac{Px}{48EI} (3l^2 - 4x^2) \end{aligned}$$


8. SIMPLE BEAM—CONCENTRATED LOAD AT ANY POINT

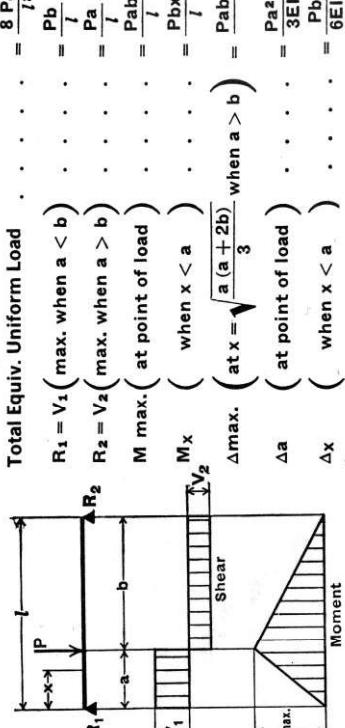

ANSWER

$$\begin{aligned} \text{Total Equiv. Uniform Load} &= \frac{8Pab}{l^2} \\ R_1 &= V_1 \left(\text{max. when } a < b \right) \\ R_2 &= V_2 \left(\text{max. when } a > b \right) \\ M_{\max.} (\text{at point of load}) &= \frac{Pa}{l} \\ M_x &= \left(\text{when } x < a \right) \frac{Pbx}{l} \\ \Delta \text{max.} (\text{at } x = \sqrt{\frac{a(a+2b)}{3}} \text{ when } a > b) &= \frac{Pab(a+2b)\sqrt{3a(a+2b)}}{27EI} \\ \Delta a &= \left(\text{at point of load} \right) \frac{Pa^2b^2}{3EI} \\ \Delta x &= \left(\text{when } x < a \right) \frac{Pbx}{6EI} \frac{(l^2 - b^2 - x^2)}{l} \end{aligned}$$


9. SIMPLE BEAM—TWO EQUAL CONCENTRATED LOADS SYMMETRICALLY PLACED

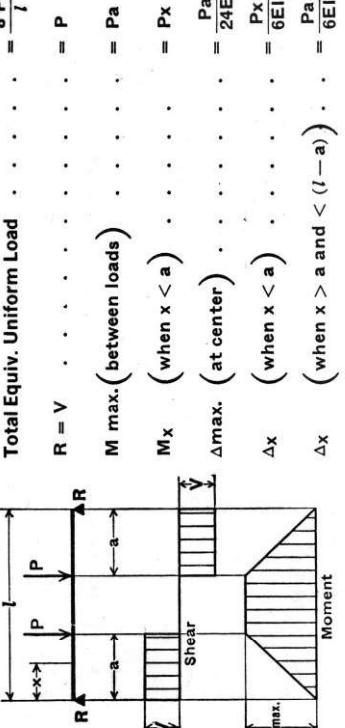


ANSWER

$$\begin{aligned} \text{Total Equiv. Uniform Load} &= \frac{8Pa}{l} \\ R &= V \\ M_{\max.} (\text{between loads}) &= Pa \\ M_x &= \left(\text{when } x < a \right) \frac{Px}{l} \\ \Delta \text{max. (at center)} &= \frac{Pa}{24EI} (3l^2 - 4a^2) \\ \Delta x &= \left(\text{when } x < a \right) \frac{Px}{6EI} (3la - 3x^2 - a^2) \\ \Delta x &= \left(\text{when } x > a \text{ and } < (l-a) \right) \frac{Pa}{6EI} (3lx - 3x^2 - a^2) \end{aligned}$$


10. SIMPLE BEAM—TWO EQUAL CONCENTRATED LOADS UNSYMMETRICALLY PLACED

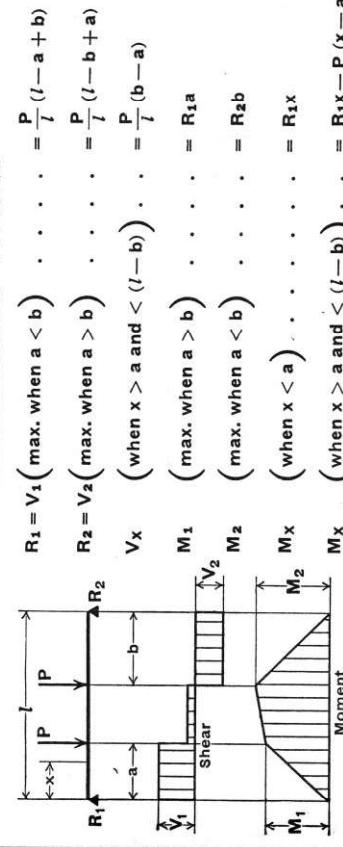

11. SIMPLE BEAM—TWO UNEQUAL CONCENTRATED LOADS UNSYMMETRICALLY PLACED

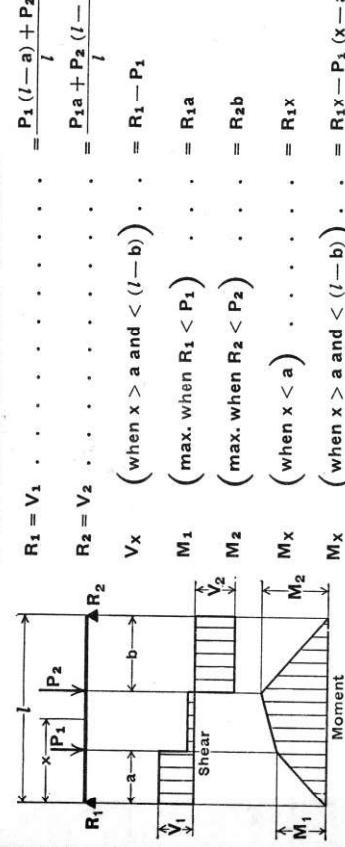


12. BEAM FIXED AT ONE END, SUPPORTED AT OTHER—UNIFORMLY DISTRIBUTED LOAD

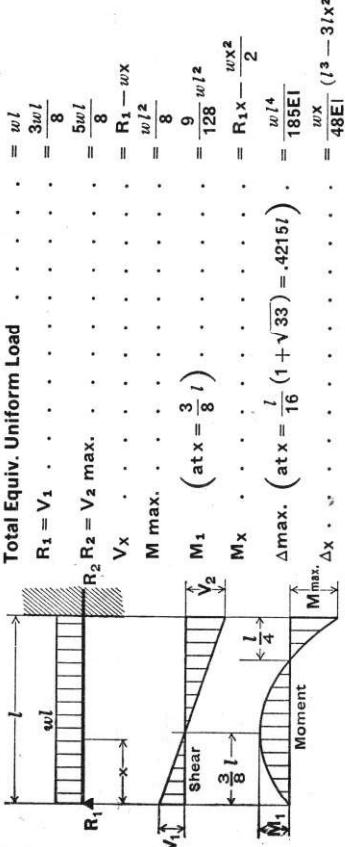


ANSWER

$$\begin{aligned} \text{Total Equiv. Uniform Load} &= \frac{wl}{3} \\ R_1 &= V_1 \\ R_2 &= V_2 \text{ max.} \\ V_x &= \left(\text{at } x = \frac{3}{8}l \right) \\ M_{\max.} &= \frac{5wl^2}{8} \\ M_x &= \left(\text{at } x = \frac{3}{8}l \rightarrow \frac{1}{4}l \right) \\ \Delta \text{max. (at } x = \frac{l}{16} (1 + \sqrt{33}) = .4215l \text{)} &= \frac{9}{128} \frac{wl^2}{2} \\ \Delta x &= \left(\text{when } x > a \text{ and } < (l-a) \right) \frac{wl^4}{48EI} (l^3 - 3lx^2 + 2x^3) \end{aligned}$$


**13. BEAM FIXED AT ONE END, SUPPORTED AT OTHER—
CONCENTRATED LOAD AT CENTER**

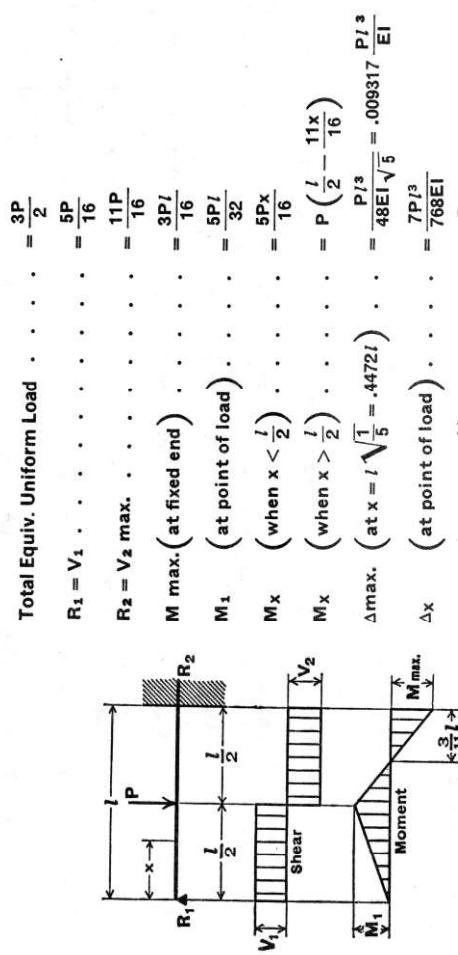


15. BEAM FIXED AT BOTH ENDS—UNIFORMLY DISTRIBUTED LOADS

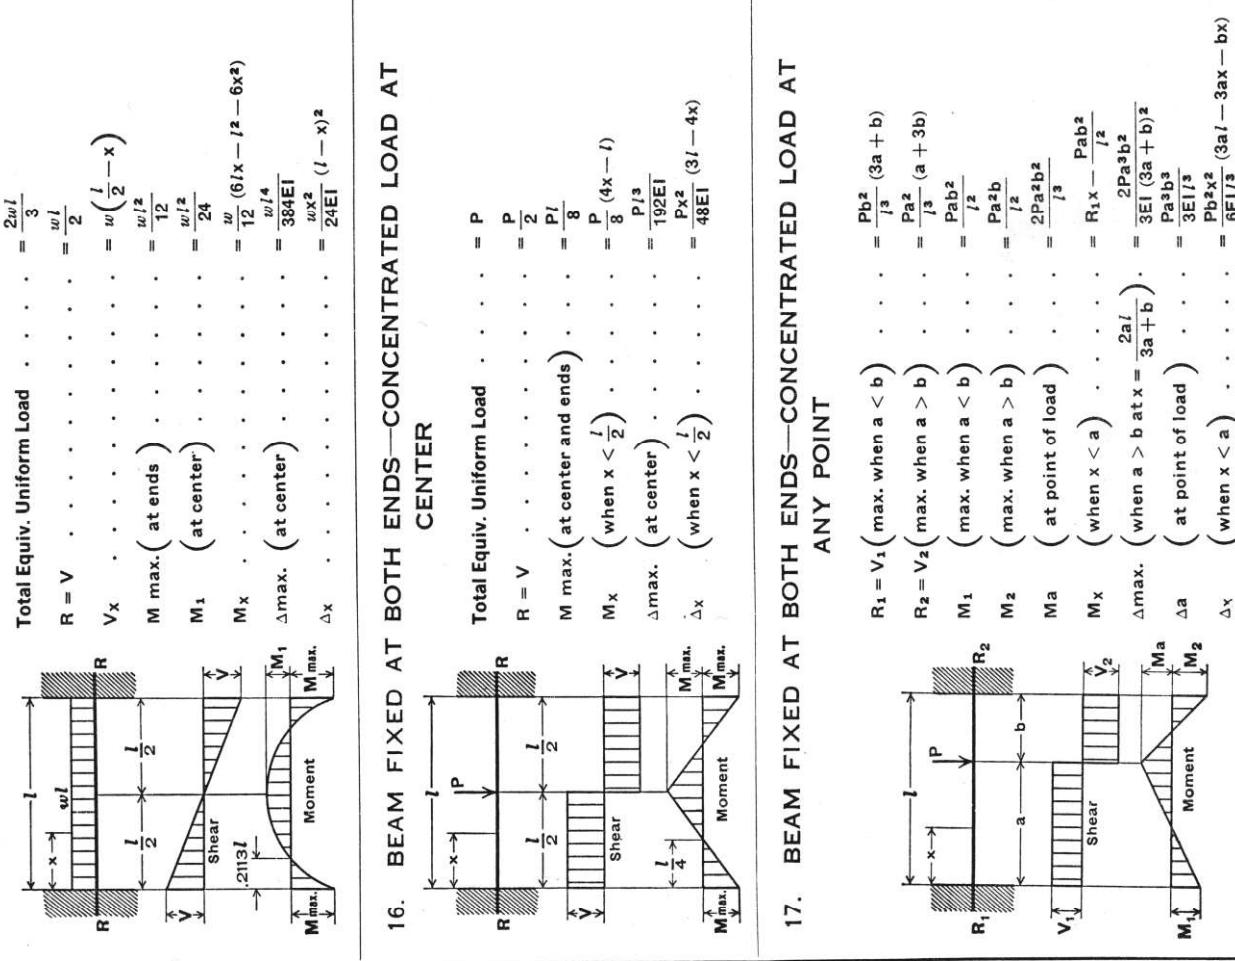


**14. BEAM FIXED AT ONE END, SUPPORTED AT OTHER—
CONCENTRATED LOAD AT ANY POINT**

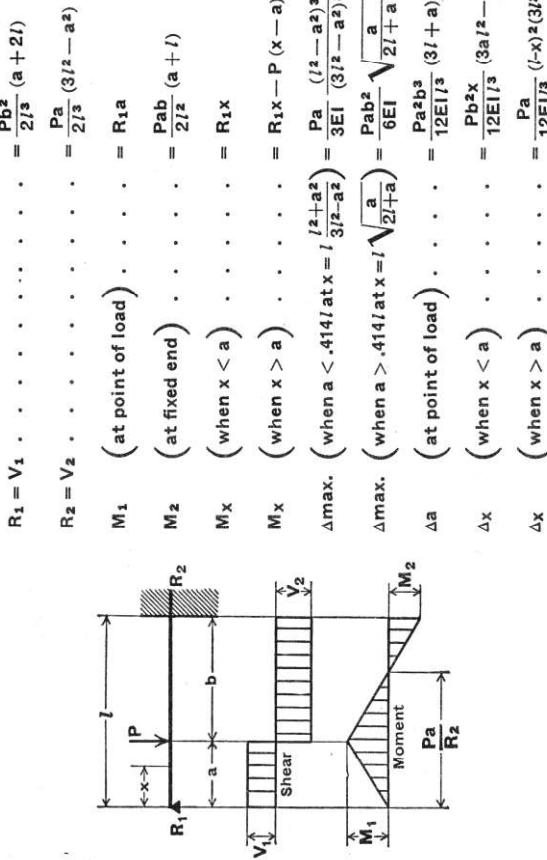


16. BEAM FIXED AT BOTH ENDS—CONCENTRATED LOAD AT CENTER

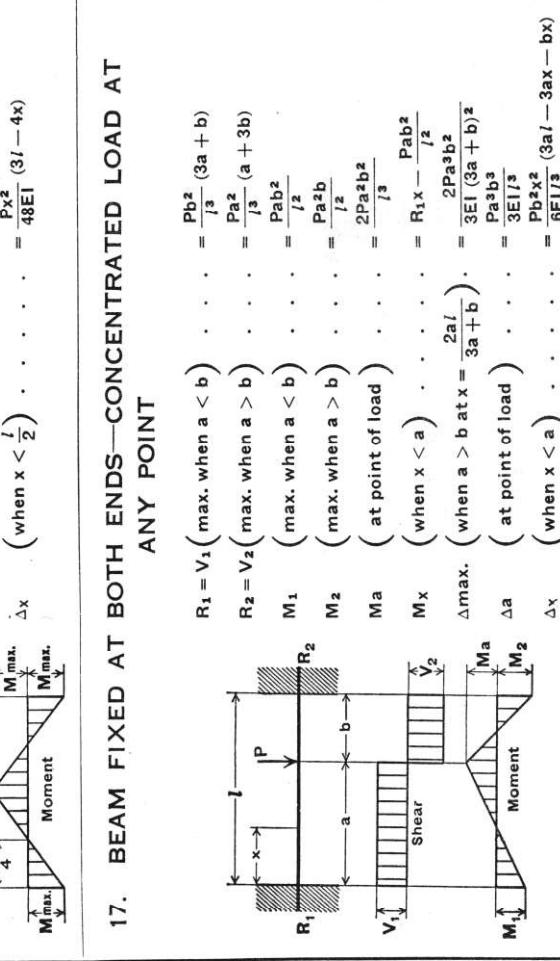

17. BEAM FIXED AT BOTH ENDS—CONCENTRATED LOAD AT ANY POINT

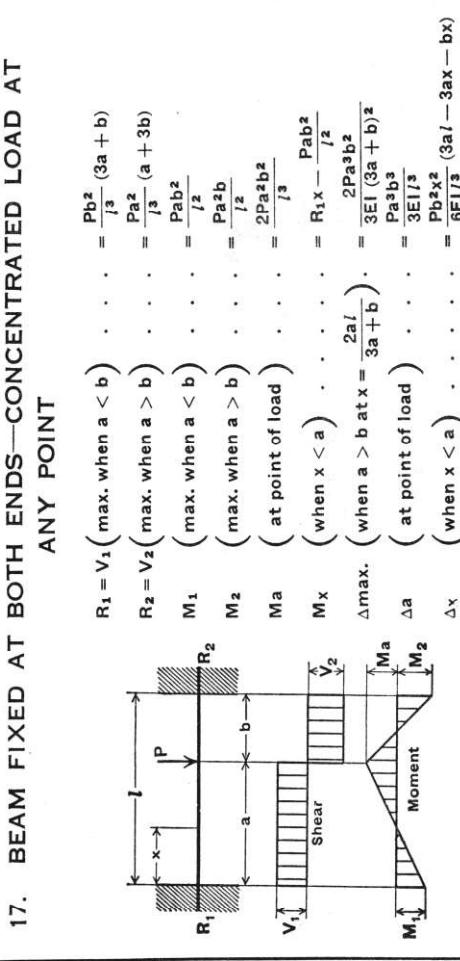


18. CANTILEVER BEAM—LOAD INCREASING UNIFORMLY TO FIXED END

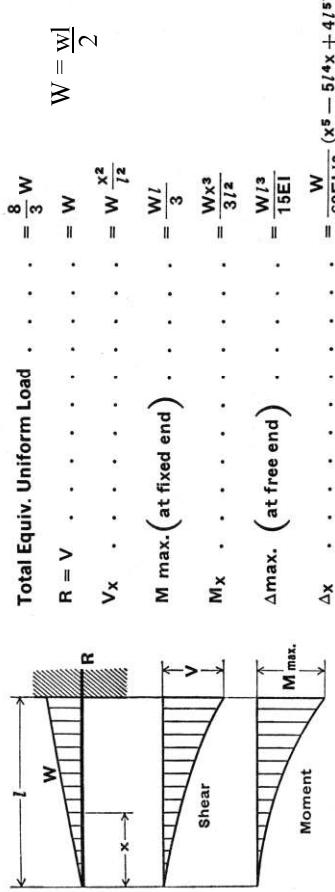


Total Equiv. Uniform Load	$\frac{8}{3}w$
$R = V$	wl
V_x	wx
$M \max. \text{ (at fixed end)}$	$w\frac{x^2}{l^2}$
M_x	$\frac{wx^3}{3l^2}$
$\Delta \max. \text{ (at free end)}$	$\frac{wl^3}{15EI}$
Δ_x	$\frac{w}{60EI/l^2} (x^5 - 5/4x^4 + 4/5)$

19. CANTILEVER BEAM—UNIFORMLY DISTRIBUTED LOAD

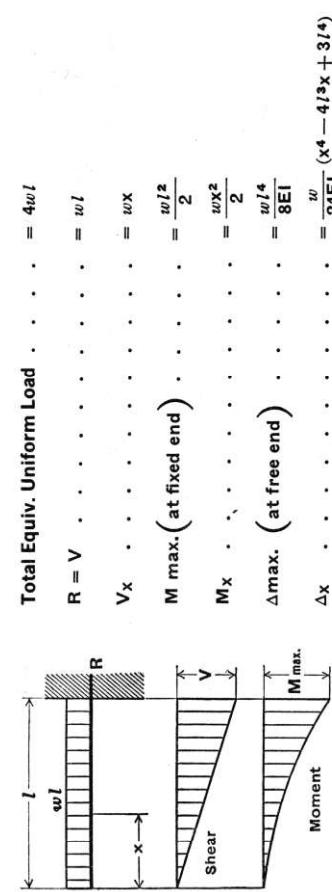


Total Equiv. Uniform Load	$4wl$
$R = V$	wl
V_x	wx
$M \max. \text{ (at fixed end)}$	$\frac{wl^2}{2}$
M_x	$\frac{wx^2}{2}$
$\Delta \max. \text{ (at free end)}$	$\frac{wl^4}{8EI}$
Δ_x	$\frac{w}{24EI} (x^4 - 4/3x^3 + 3/4)$


20. BEAM FIXED AT ONE END, FREE TO DEFLECT VERTICALLY BUT NOT ROTATE AT OTHER—UNIFORMLY DISTRIBUTED LOAD

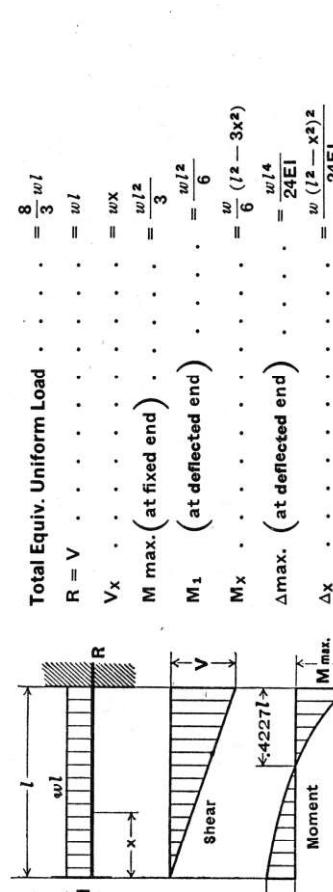


21. CANTILEVER BEAM—CONCENTRATED LOAD AT ANY POINT

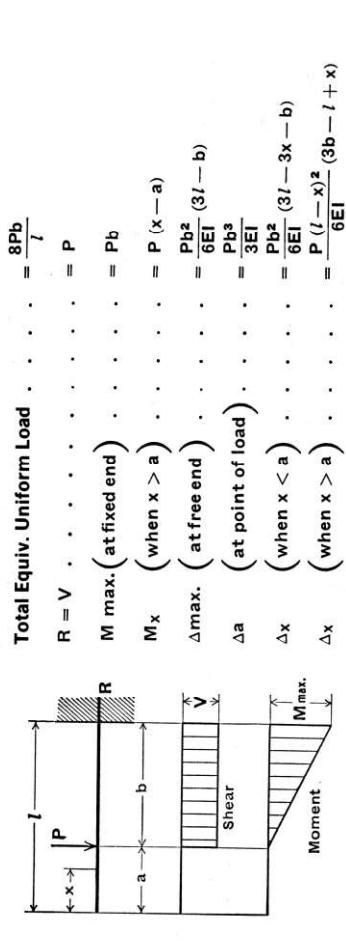


22. CANTILEVER BEAM—CONCENTRATED LOAD AT FREE END

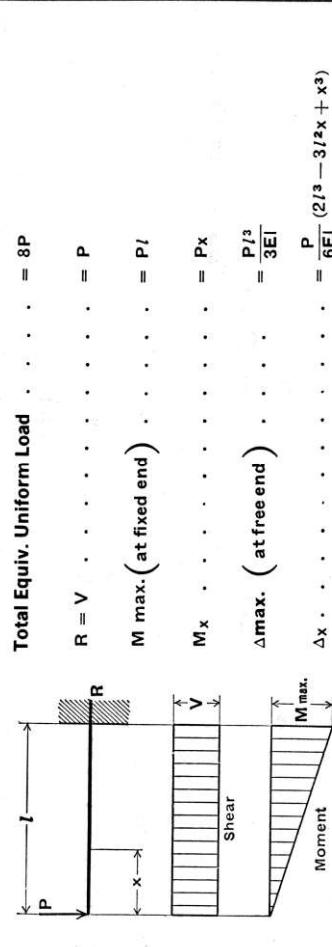



23. BEAM FIXED AT ONE END, FREE TO DEFLECT VERTICALLY BUT NOT ROTATE AT OTHER—CONCENTRATED LOAD AT DEFLECTED END

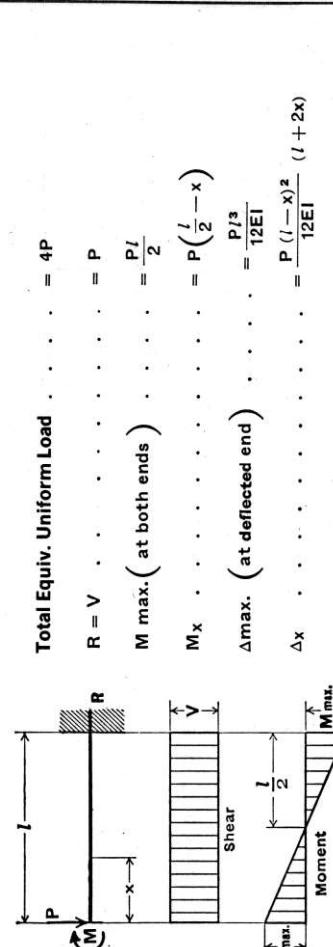


24. BEAM OVERHANGING ONE SUPPORT—UNIFORMLY DISTRIBUTED LOAD

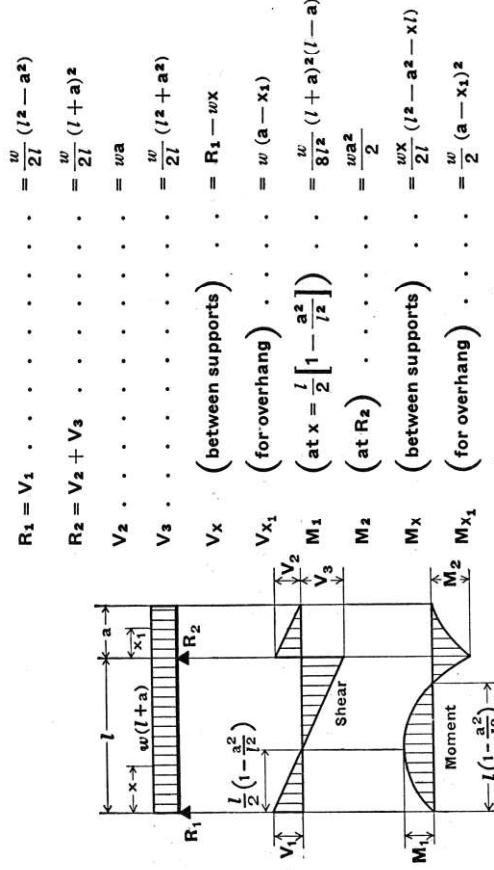


26. BEAM OVERHANGING ONE SUPPORT—CONCENTRATED LOAD AT END OF OVERHANG

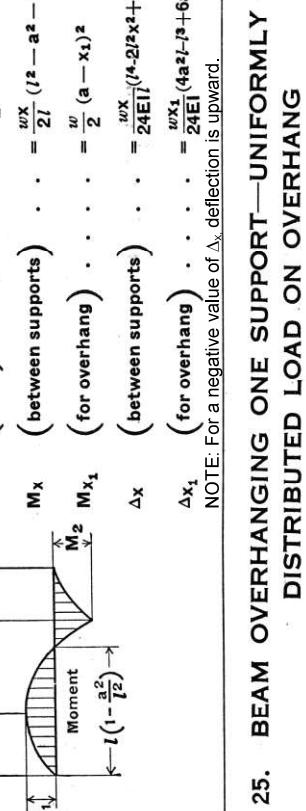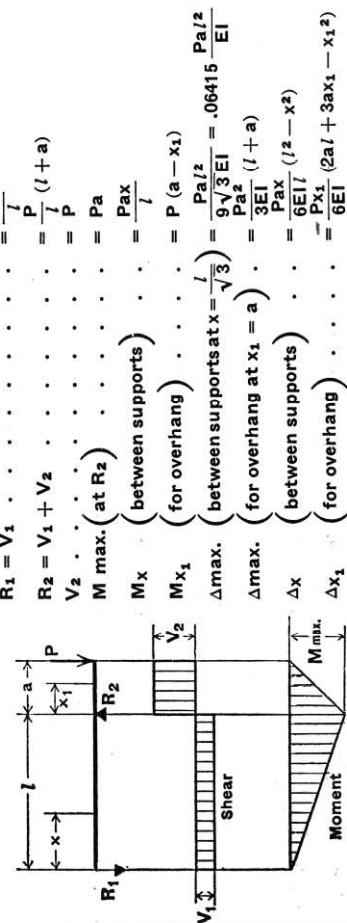


27. BEAM OVERHANGING ONE SUPPORT—UNIFORMLY DISTRIBUTED LOAD BETWEEN SUPPORTS

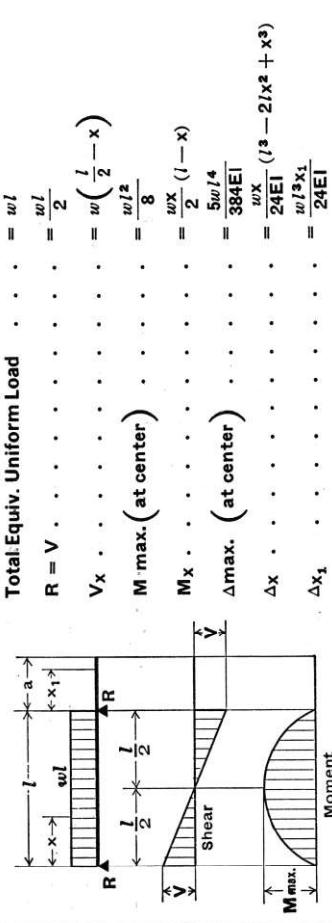


28. BEAM OVERHANGING ONE SUPPORT—CONCENTRATED LOAD AT ANY POINT BETWEEN SUPPORTS

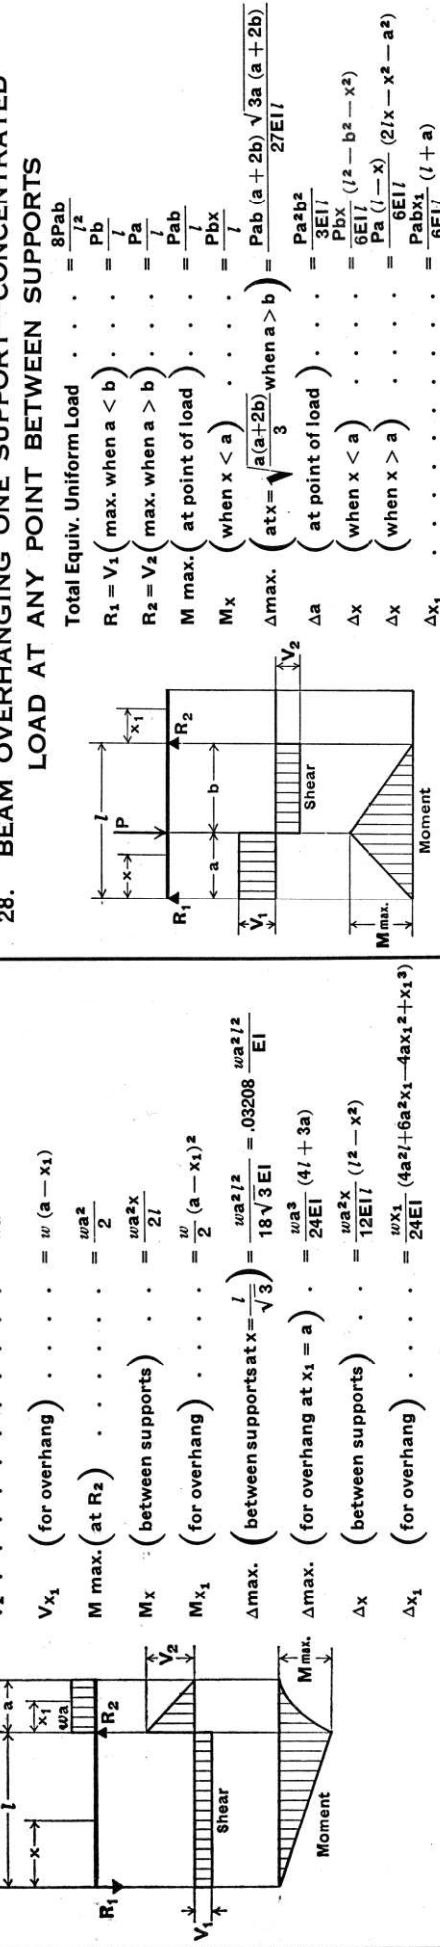


29. CONTINUOUS BEAM—TWO EQUAL SPANS—UNIFORM LOAD ON ONE SPAN

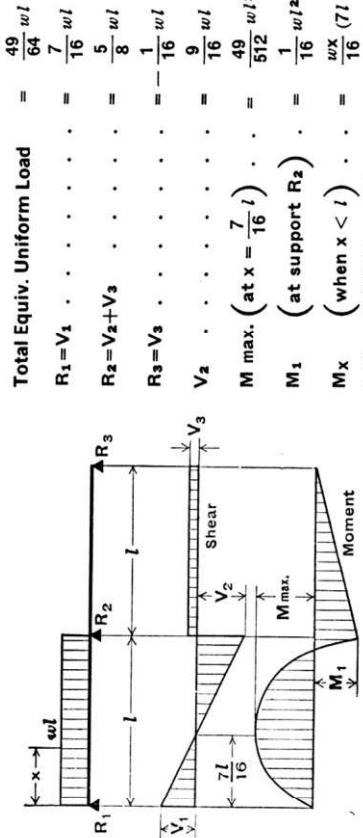


30. CONTINUOUS BEAM—TWO EQUAL SPANS—CONCENTRATED LOAD AT CENTER OF ONE SPAN

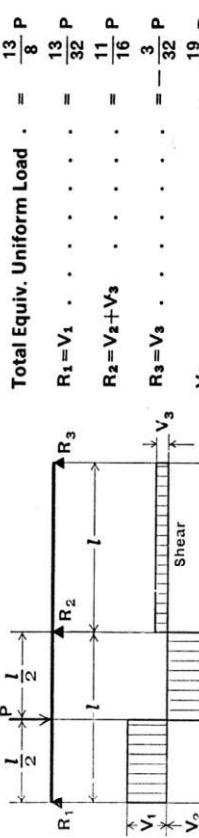

31. CONTINUOUS BEAM—TWO EQUAL SPANS—CONCENTRATED LOAD AT ANY POINT

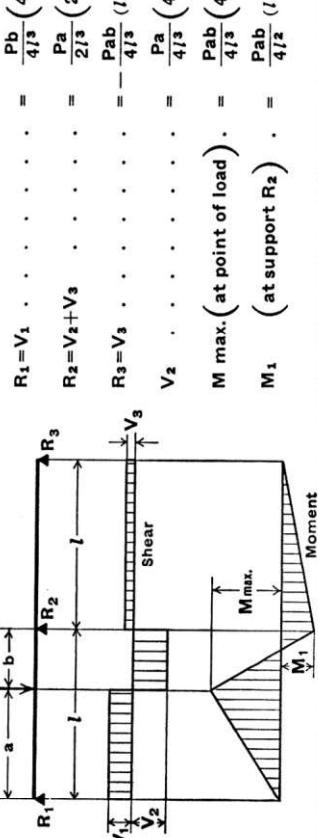


32. BEAM—UNIFORMLY DISTRIBUTED LOAD AND VARIABLE END MOMENTS

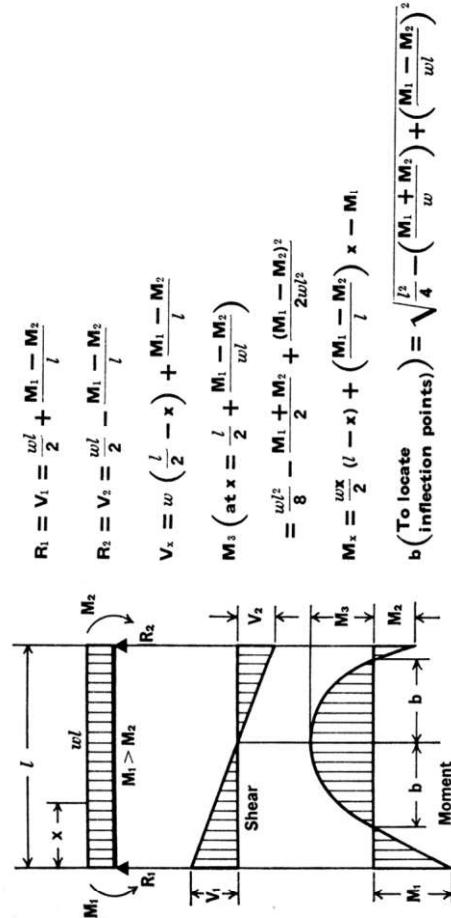

$$b \left(\text{To locate inflection points} \right) = \sqrt{\frac{l^2}{4} - \left(\frac{M_1 + M_2}{w} \right)^2 + \left(\frac{M_1 - M_2}{wl} \right)^2}$$

$$\Delta_x = \frac{wx}{24EI} \left[x^4 - \left(2l + \frac{4M_1}{wl} - \frac{4M_2}{wl} \right) x^2 + \frac{12M_1}{w}x + l^2 - \frac{8M_1l}{w} - \frac{4M_2l}{w} \right]$$


33. BEAM—CONCENTRATED LOAD AT CENTER AND VARIABLE END MOMENTS

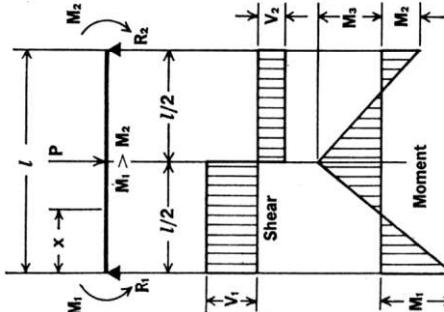


$$\Delta_x \left(\text{When } x < \frac{l}{2} \right) = \frac{Px}{48EI} \left(3l^2 - 4x^2 - \frac{8(l-x)}{P} \{ M_1(2l-x) + M_2(l+x) \} \right)$$

Note Set 8.2 (page 7)


34. CONTINUOUS BEAM—THREE EQUAL SPANS—ONE END SPAN UNLOADED

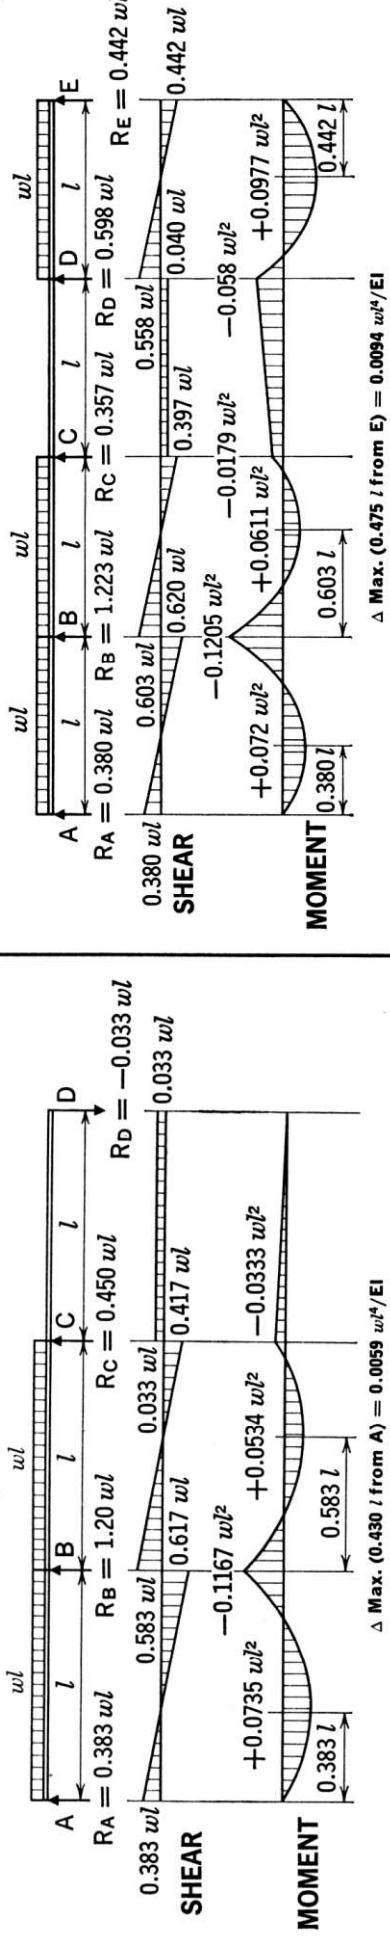


35. CONTINUOUS BEAM—THREE EQUAL SPANS—END SPANS LOADED

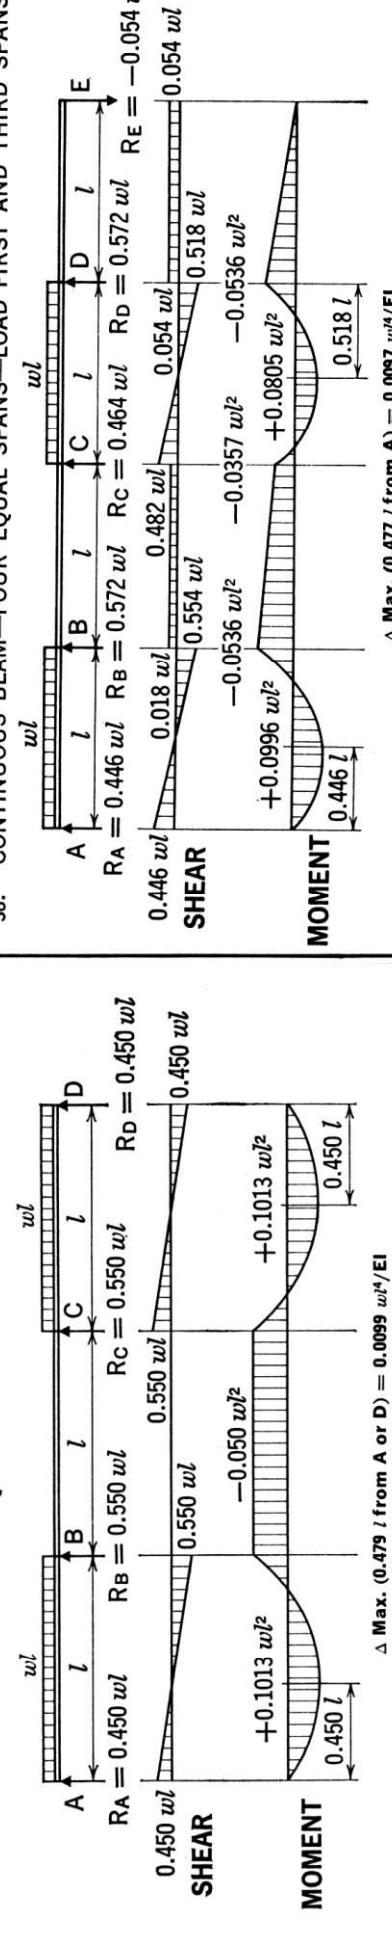


36. CONTINUOUS BEAM—THREE EQUAL SPANS—ALL SPANS LOADED

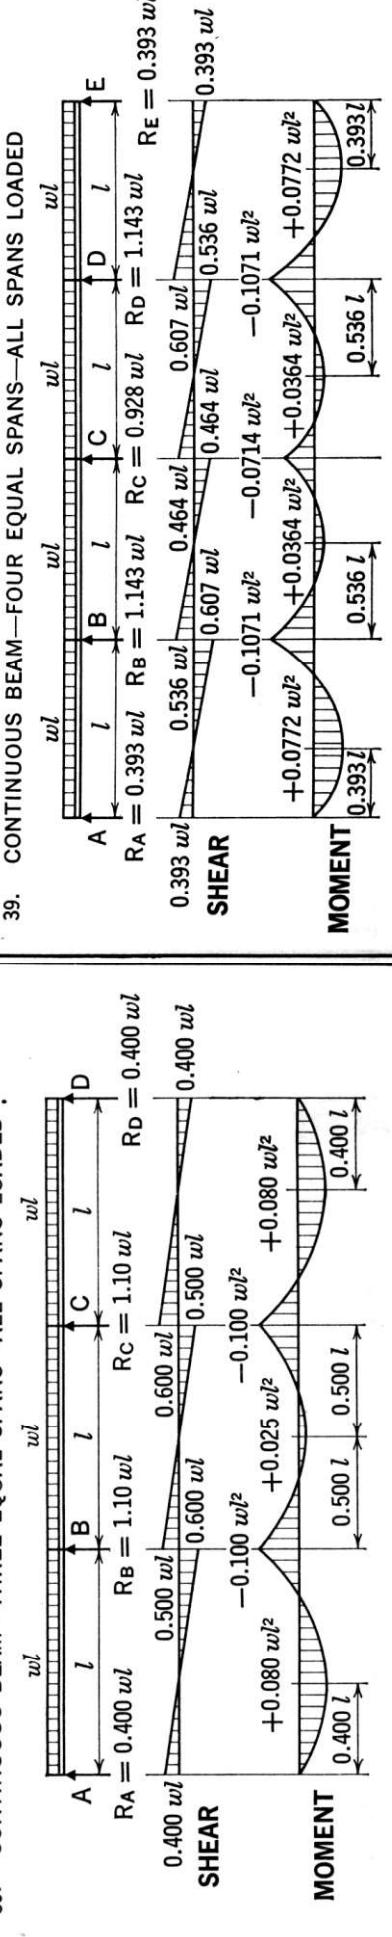

37. CONTINUOUS BEAM—FOUR EQUAL SPANS—THIRD SPAN UNLOADED

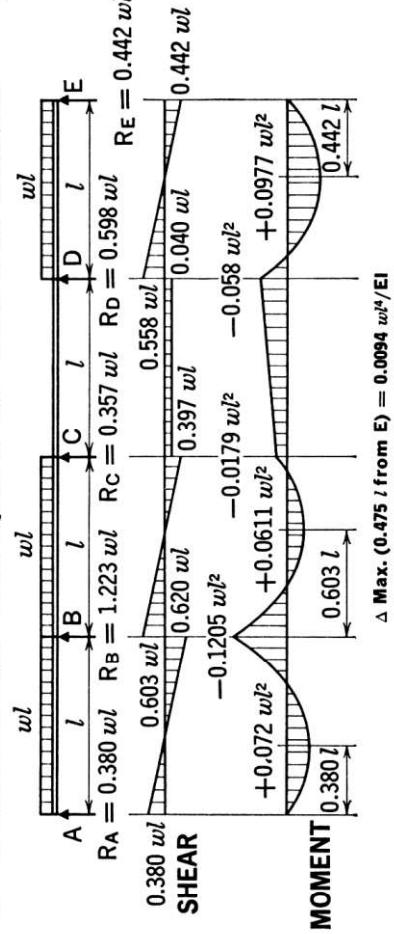

38. CONTINUOUS BEAM—FOUR EQUAL SPANS—LOAD FIRST AND THIRD SPANS

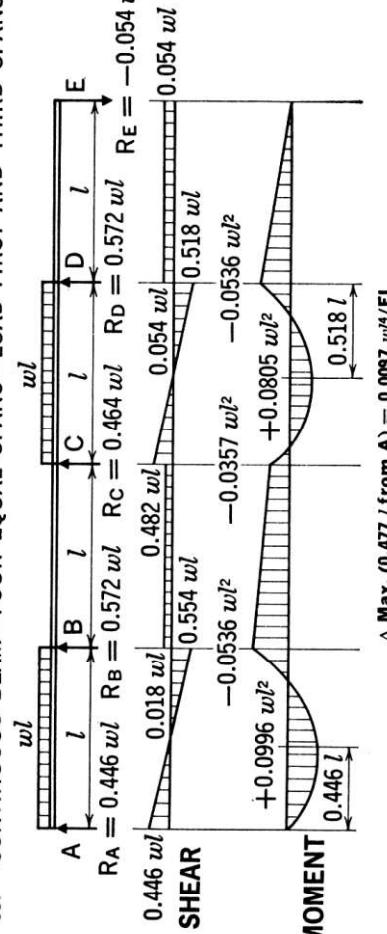

39. CONTINUOUS BEAM—FOUR EQUAL SPANS—ALL SPANS LOADED

