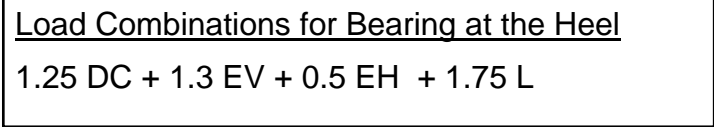


Load Combinations for Sliding and Bearing at the Toe

$0.9 \text{ DC} + 0.9 \text{ EV} + 1.35 \text{ EH} + 1.75 \text{ LS}$

$1.25 \text{ DC} + 1.3 \text{ EV} + 1.35 \text{ EH} + 1.75 \text{ LS} + 1.75 \text{ L}$


$$1.25 \text{ DC} + 1.3 \text{ EV} + 0.5 \text{ EH} + 1.75 \text{ L}$$