

JOB NO.

LOCATION
SUBJECT




AUTOFLOW INCORPORATED

DALLAS, TEXAS

FV

VALVE CONSTRUCTION

- * All components manufactured from non-ferrous material - brass and stainless steel.
- * Valve rated to 600 PSIG @ 275°F.
- * Ground joint union
- * All valves are factory calibrated to deliver specified flow rates within $\pm 5\%$ accuracy.
- * Valves are offered with threaded ends, solder ends, or with combination of both end types.

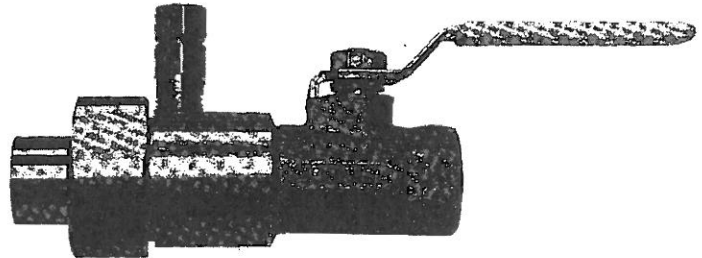

PERFORMANCE • DIMENSIONS • WEIGHTS


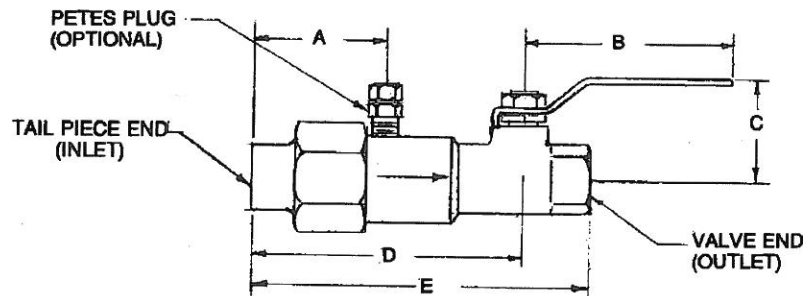


Figure 1

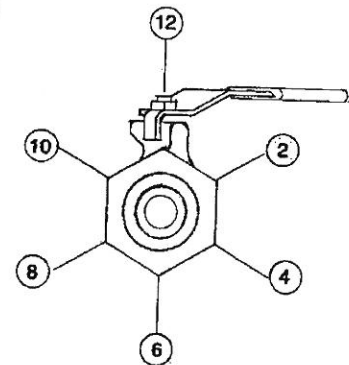

TAIL PIECE END VIEW

Figure 2 - Available
Pete's Plug Positions

NOMINAL DIMENSIONS (INCHES)									REGULATOR FLOW RATES	
MODEL	THRD. ENDS FPT INCHES	SOLDER ENDS ID INCHES ($\pm .002$)	A	B	C	D	E	WEIGHT (LBS.)	FLOW DIVISIONS GPM	FLOW RANGE** GPM
FV-050	1/2	0.629	2.06	3.80	1.70	3.70	5.20	2.75	0.25	0.25 to 4.0
FV-075	3/4	0.879	1.88	4.75	2.05	3.30	4.80	2.35	0.25	0.25 to 7.0
FV-100	1	0.130	2.06	4.75	2.25	3.70	5.95	3.10	0.50	1.0 to 12.0
FV-125	1 1/4	1.380	2.44	5.43	2.60	4.30	6.20	6.00	0.75	3.0 to 18.0
FV-150	1 1/2	1.630	2.40	5.50	2.80	5.35	7.50	8.50	0.75	5.0 to 24.0
FV-200	2	2.130	2.70	5.50	3.00	6.00	7.20	13.50	1.00	8.0 to 50.0
FV-250	2 1/2	N/A	3.00	7.90	4.10	7.60	11.00	33.50	2.00	12.0 to 70.0
FV-300	3	N/A	3.00	7.90	4.00	7.60	11.00	34.25	4.00	16.0 to 140.0

NOTE: All weights and dimensions subject to minor changes.

*Weights based on valves with Pete's Plugs

**Rangeability: 3 to 40 PSID.

REPRESENTED BY:

MINSTER & ASSOCIATES
314 New Salem Street
Park Forest, Illinois 60466
481-6090 748-7893