



## UNDEFORMED

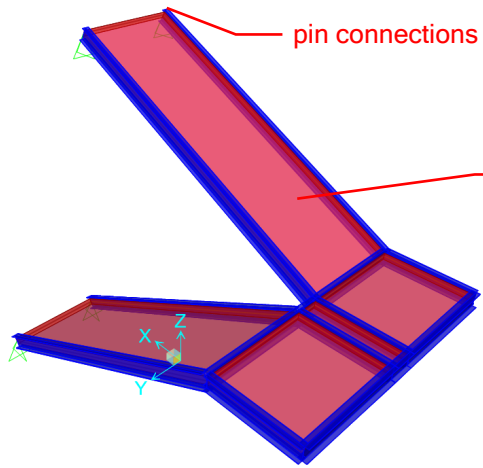


pin connections

area section with shell loads applied to frame. Stiffness in global Y direction assigned as 0 to encourage beam minor bending to take all lateral load

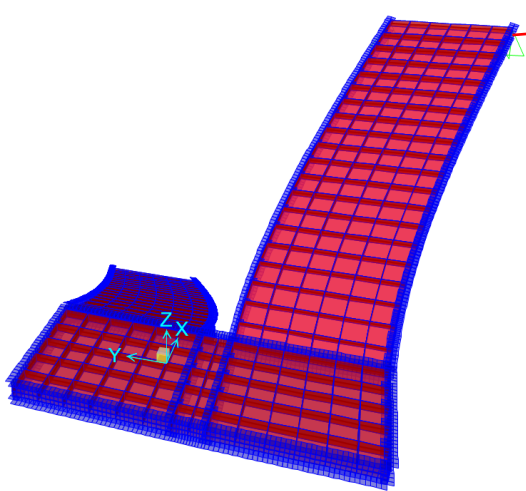

displaced supports be 0.01h (45mm)

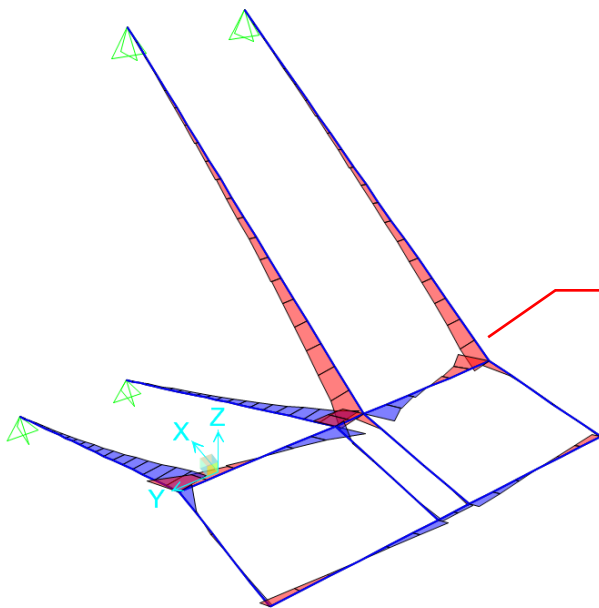

minor moment = 0.82 kNm with W310