


EXISTING CMU/BRICK CAVITY EXTERIOR WALL

NO OPENINGS THROUGH THESE WALLS AND NO STRUCTURAL CONNECTION TO SHELTER

NO STRUCTURAL CONNECTION BETWEEN EXISTING AND SHELTER

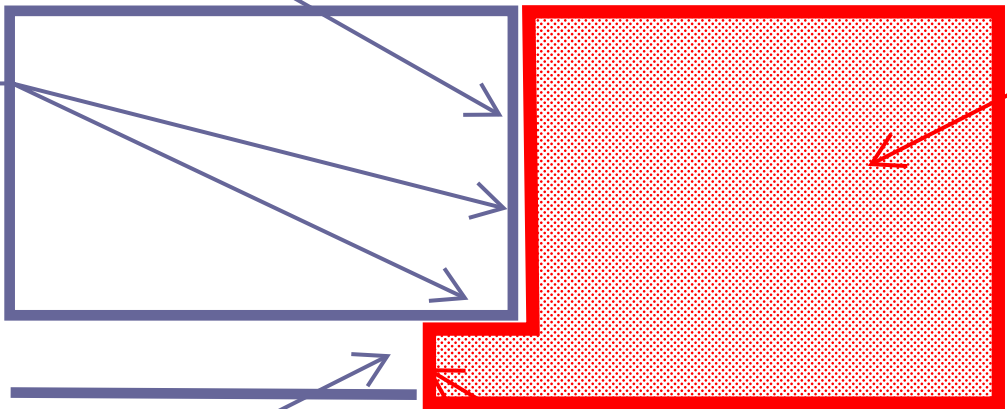

NEW SHELTER WITH SOLID GROUTED CMU PERIMETER WALLS AND ROOF OF 12" HOLLOWCORE AND 4" TOPPING.

SHELTER WALL HAS FIRE RATED DOOR ACROSS CORRIDOR