

NorthWoods Software

Program Name: Moment_of_Inertia-Segment

Project Number: -

Project Description: -

Project Designer: Dik



Last Revised (yy-mm-dd): 21.11.21


Reference: NBCC, CSA S16

Disclaimer:

Created using SMath Studio, a MathCAD workalike from <https://en.smith.info/view/SMathStudio>. The User is responsible to verify data and calculations using an alternative method

Menu:


 Input Data	 Important Output	 Logical Constructs	 Units
 Sum / For	 Important Note	 Temporary Variables	

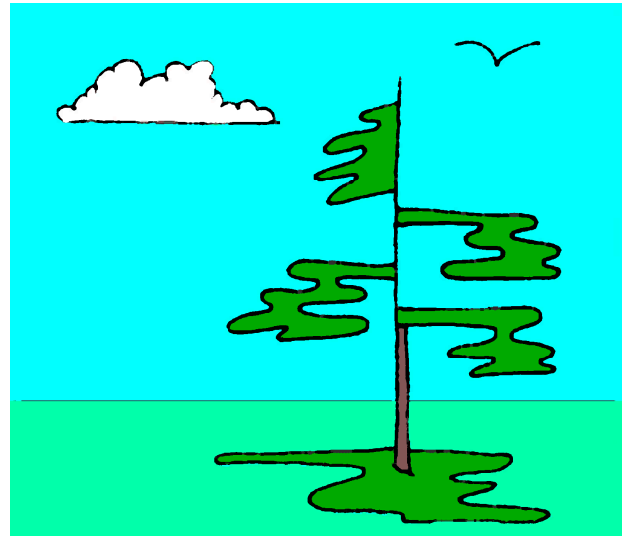

Defined Units:

$grav := 9.80665 \frac{m}{sec^2}$					Acceleration
$K := kip$					Force
$K_{ft} := K ft$	$kN_m := kN m$	$K_{in} := K in$	$kN_{mm} := kN mm$	$lb_{in} := lbf in$	Moment
$kNmpm := \frac{kN_m}{m}$	$iKpi := \frac{K_{in}}{in}$				Moment per Unit Length
$pcf := \frac{lbf}{ft^3}$	$kNpcm := \frac{kN}{m^3}$	$kgpcm := \frac{kg}{m^3}$			Density
$Klf := \frac{K}{ft}$	$pli := \frac{plf}{in}$	$plf := \frac{lbf}{ft}$	$kNpm := \frac{kN}{m}$	$Kpi := \frac{K}{in}$	Force/Unit Length
$kNpmm := \frac{kN}{mm}$					Force/Unit Length
$psf := \frac{lbf}{ft^2}$	$Ksf := \frac{K}{ft^2}$	$Ksi := \frac{K}{in^2}$	$kNpsm := \frac{kN}{m^2}$	$psi := \frac{lbf}{in^2}$	Pressure
$Npsmm := \frac{N}{mm^2}$					Pressure
$pci := \frac{lbf}{in^3}$					Subgrade Modulus
$psf_{pf} := \frac{psf}{ft}$	$kPapm := \frac{kPa}{m}$				Pressure per Depth
$pmcf := \frac{lb}{ft^3}$	$lb := lbf$				Force
$mph := \frac{mi}{hr}$	$kph := \frac{km}{hr}$	$mps := \frac{m}{sec}$			Velocity/Speed
$ispf := \frac{in^2}{ft}$	$mmspm := \frac{mm^2}{m}$				Area per Unit Length
$ppf := \frac{lbf}{ft}$	$Npm := \frac{N}{m}$				Stiffness

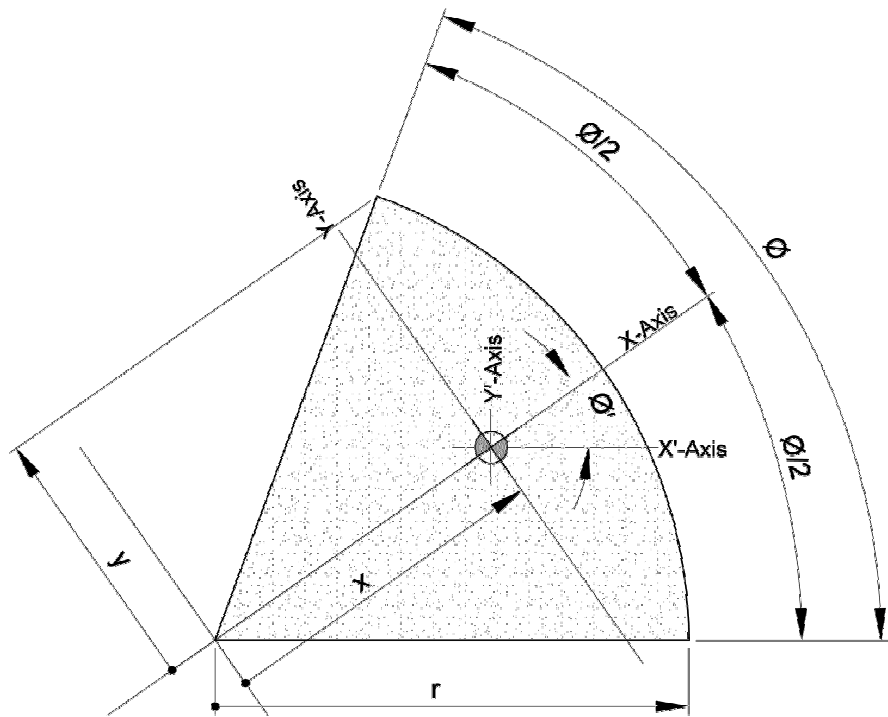

**Data Input:**

$$r := 20 \text{ in}$$

$$\phi := 40^\circ$$

$$\phi' := 0^\circ$$

$$\phi_{\text{ovr2}} := \frac{\phi}{2}$$

$$A := \phi_{\text{ovr2}} \cdot r^2$$

$$x := \frac{2 \cdot r \cdot \sin(\phi_{\text{ovr2}})}{3 \cdot \phi_{\text{ovr2}}}$$

$$y := r \cdot \sin(\phi_{\text{ovr2}})$$

$$I_x := \frac{r^4}{4} \cdot (\phi_{\text{ovr2}} - \sin(\phi_{\text{ovr2}}) \cdot \cos(\phi_{\text{ovr2}}))$$

$$I_y := \frac{r^4}{4} \cdot (\phi_{\text{ovr2}} + \sin(\phi_{\text{ovr2}}) \cdot \cos(\phi_{\text{ovr2}}))$$

$$I_{xy} := 0 \text{ in}^4$$

$$I_{x'} := \frac{I_x + I_y}{2} + \left(\frac{I_x - I_y}{2} \right) \cdot \cos(2 \cdot \phi') - I_{xy} \cdot \sin(2 \cdot \phi')$$

$$I_{y'} := \frac{I_x + I_y}{2} - \left(\frac{I_x - I_y}{2} \right) \cdot \cos(2 \cdot \phi') + I_{xy} \cdot \sin(2 \cdot \phi')$$

$$I_{xy'} := \frac{I_x - I_y}{2} \cdot \sin(2 \cdot \phi') + I_{xy} \cdot \cos(2 \cdot \phi')$$

$$r = 20.00 \text{ in}$$

$$\phi = 40.00^\circ$$

$$\phi' = 0.00^\circ$$

$$\phi_{\text{ovr2}} = 20.00^\circ$$

$$A = 139.63 \text{ in}^2$$

$$x = 13.06 \text{ in}$$

$$y = 6.84 \text{ in}$$

$$I_x = 1106.88 \text{ in}^4$$

$$I_y = 26818.39 \text{ in}^4$$

$$I_{xy} = 0.00 \text{ in}^4$$

$$I_{x'} = 1106.88 \text{ in}^4$$

$$I_{y'} = 26818.39 \text{ in}^4$$

$$I_{xy'} = 0.00 \text{ in}^4$$

$$r = 508.00 \text{ mm}$$

$$\phi = 40.00^\circ$$

$$\phi' = 0.00^\circ$$

$$\phi_{\text{ovr2}} = 20.00^\circ$$

$$A = 90081.33 \text{ mm}^2$$

$$x = 331.83 \text{ mm}$$

$$y = 173.75 \text{ mm}$$

$$I_x = 4.61 \cdot 10^8 \text{ mm}^4$$

$$I_y = 1.12 \cdot 10^{10} \text{ mm}^4$$

$$I_{xy} = 0.00 \text{ mm}^4$$

$$I_{x'} = 4.61 \cdot 10^8 \text{ mm}^4$$

$$I_{y'} = 1.12 \cdot 10^{10} \text{ mm}^4$$

$$I_{xy'} = 0.00 \text{ mm}^4$$

Radius of Segment

Included Angle of Segment

Angle of Rotation of Segment

Area of Segment

X-Axis Centroidal Distance

Y-Axis Centroidal Distance

Moment of Inertia (X-Axis)


Moment of Inertia (Y-Axis)

Polar Moment of Inertia

Transformed M of Inertia (X-Axis)

Transformed M of Inertia (Y-Axis)

Trans Polar Moment of Inertia

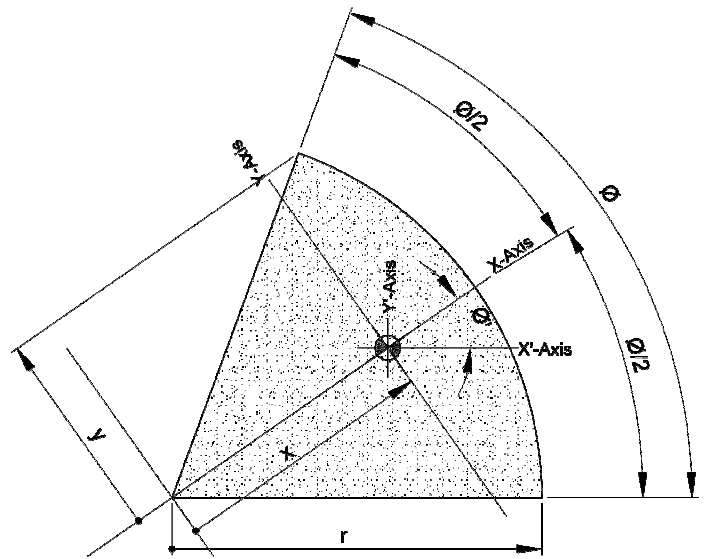

Summary

Radius of Segment

$$r = 20.00 \text{ in}$$

$$r = 508.00 \text{ mm}$$

Included Angle of Segment

$$\phi = 40.00^\circ$$

Angle of Rotation of Segment

$$\phi' = 0.00^\circ$$

Area of Segment

$$A = 139.63 \text{ in}^2$$

$$A = 90081.33 \text{ mm}^2$$

X-Axis Centroidal Distace

$$x = 13.06 \text{ in}$$

$$x = 331.83 \text{ mm}$$

Y-Axis Centroidal Distance

$$y = 6.84 \text{ in}$$

$$y = 173.75 \text{ mm}$$

Moment of Inertia (X-Axis)

$$I_x = 1106.88 \text{ in}^4$$

$$I_x = 4.61 \cdot 10^8 \text{ mm}^4$$

Moment of Inertia (Y-Axis)

$$I_y = 26818.39 \text{ in}^4$$

$$I_y = 1.12 \cdot 10^{10} \text{ mm}^4$$

Polar Moment of Inertia

$$I_{xy} = 0.00 \text{ in}^4$$

$$I_{xy} = 0.00 \text{ mm}^4$$

Transformed M of Inertia (X-Axis)

$$I_{x'} = 1106.88 \text{ in}^4$$

$$I_{x'} = 4.61 \cdot 10^8 \text{ mm}^4$$

Transformed M of Inertia (Y-Axis)

$$I_{y'} = 26818.39 \text{ in}^4$$

$$I_{y'} = 1.12 \cdot 10^{10} \text{ mm}^4$$

Trans Polar Moment of Inertia

$$I_{xy'} = 0.00 \text{ in}^4$$

$$I_{xy'} = 0.00 \text{ mm}^4$$