


## Strong-Wall® SB Shearwall Product Data

The products in this catalog are readily available through our nationwide network of distributors and dealers. For more information on other applications or other Strong-Wall® shearwall products, please contact your Simpson Strong-Tie® representative.

## Strong-Wall® SB Shearwall Product Data


Model No.	W (in.)	H (in.)	Anchor Bolts		Number of Screws in Top of Wall	Total Wall Weight (lbs.)
			Quantity	Dia. (in.)		
SWSB12x7	12	78	2	7/8	6	100
SWSB18x7	18	78	2	7/8	8	145
SWSB12x7.5	12	85½	2	7/8	6	110
SWSB18x7.5	18	85½	2	7/8	8	155
SWSB12x8	12	93¼	2	7/8	6	115
SWSB18x8	18	93¼	2	7/8	8	165
SWSB24x8	24	93¼	2	1	12	220
SWSB12x9	12	105¼	2	7/8	6	125
SWSB18x9	18	105¼	2	7/8	8	180
SWSB24x9	24	105¼	2	1	12	240
SWSB12x10	12	117¼	2	7/8	6	135
SWSB18x10	18	117¼	2	7/8	8	200
SWSB24x10	24	117¼	2	1	12	265
SWSB12x11	12	129¼	2	7/8	6	150
SWSB18x11	18	129¼	2	7/8	8	215
SWSB24x11	24	129¼	2	1	12	290
SWSB12x12	12	141¼	2	7/8	6	160
SWSB18x12	18	141¼	2	7/8	8	235
SWSB24x12	24	141¼	2	1	12	315
SWSB18x13	18	153¼	2	7/8	8	250
SWSB24x13	24	153¼	2	1	12	340
SWSB18x20	18	240	2	7/8	8	385
SWSB24x20	24	240	2	1	12	515

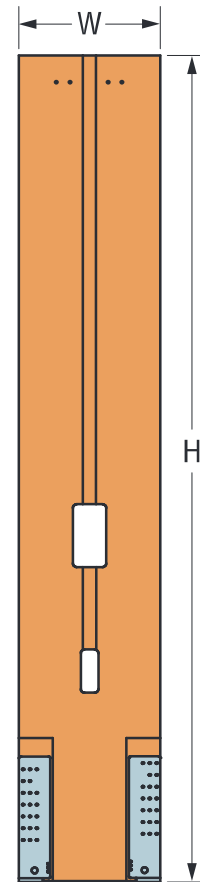

1. For heights not listed, order the next tallest panel and trim to fit. Minimum trimmed height for all panels is 74½".
2. All panels come with two pre-attached holdowns, two slotted hex nuts, two flat washers, SDS ¼" x 6¾" screws (in quantities indicated in Table), and installation instructions.
3. All panels are 3½" thick.

## Panel Naming Legend

SWSB18x8-93.25

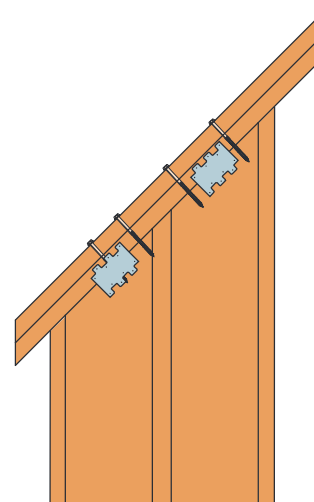Strong-Wall SB  
ShearwallWidth  
(in.)Nominal  
Height  
(ft.)Actual  
Height  
(in.)

Rake Wall Application