
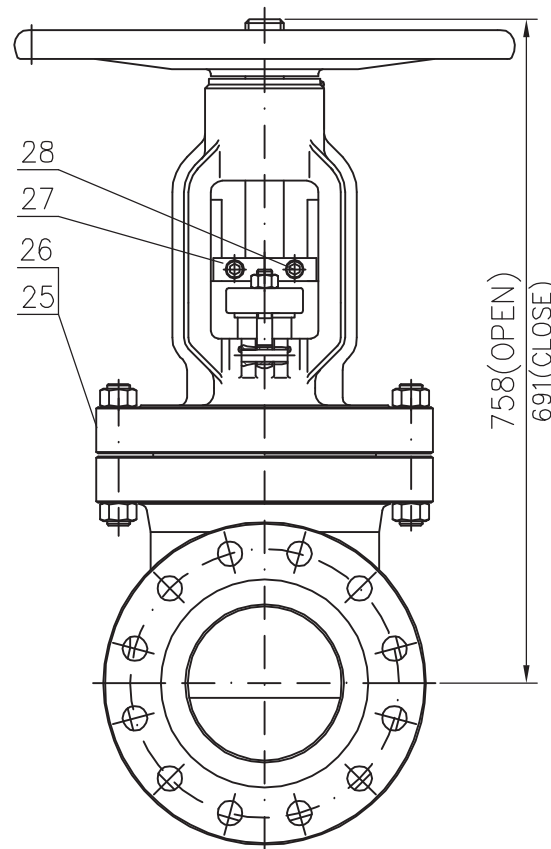


ITEM: 2

GUTTER

PROPERTY OF FBV INC., ANY UNAUTHORIZED FORM OF REPRODUCTION IS PROHIBITED

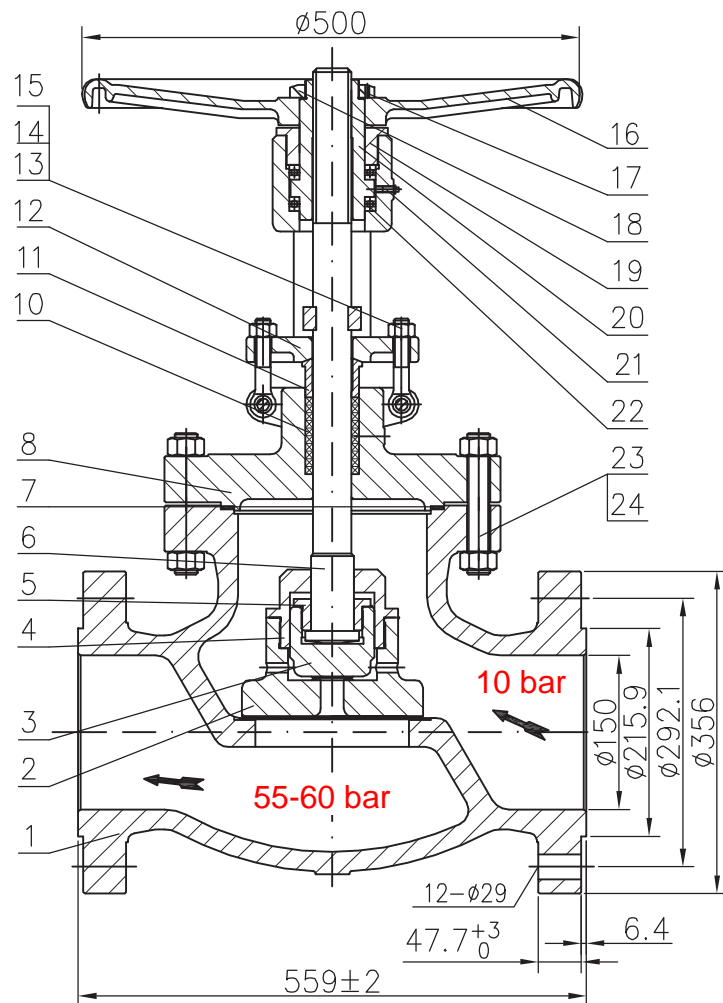


back seat @9.1
Mpa

NO.	PART NAME	MATERIAL	NOTE
1	BODY	ASTM A351 CF3M	—
2	BIG DISC	ASTM A182 F316L	—
3	SMALL DISC	ASTM A182 F316L	—
4	BIG DISC CAP	ASTM A182 F316L	—
5	SMALL DISC CAP	ASTM A182 F316L	—
6	STEM	ASTM A182 F316L	—
7	GASKET	SS316L+GRAPHITE	—
8	BONNET	ASTM A351 CF3M	—
9	—	—	—
10	STEM PACKING	FLEXIBLE GRAPHITE	—
11	GLAND	ASTM A182 F316	—
12	GLAND FLANGE	ASTM A351 CF8	—
13	GLAND EYEBOLT	ASTM A193 B8M	—
14	GLAND NUT	ASTM A194 8M	—
15	PIN	SS	—
16	HANDWHEEL	QT400-18	—
17	SCREW	ASTM A36	—
18	HANDWHEEL NUT	AISI 1035	—
19	BEARING GLAND	AISI 1035	—
20	STEM NUT	ZQAL9-4(BRONZE)	—
21	GREASE CUP	ASSEMBLY	—
22	BEARING	ALLOY	—
23	BONNET BOLT	ASTM A193 B8M	—
24	BONNET NUT	ASTM A194 8M	—
25	NAMEPLATE	SS	—
26	RIVET	AL	—
27	BLOCK	CARBON STEEL	—
28	HEX SOCKET SCREW	ANSI 1035	—
29	—	—	—
30	—	—	—

DESIGN & MFG.	BS 1873	RATING	CL 600	D	—	—	—
PRESS-TEMP RATING	ASME B16.34	SHELL	12.5 1812	C	—	—	—
FACE TO FACE DIM.	ASME B16.10	SEAT HYDRO	9.1 1319	B	—	—	—
END CONNECTION	RF	SEAT AIR	0.6 87	A	—	—	—
END DIMENSION	ASME B16.5	BACKSEAT	9.1 1319	REV	DESCRIPTION	PREP.	APP'D
PRESSURE TEST	API 598	TEMPERATURE	-29 ~ 200	DESIGN:	JXK	DATE:	09/23/2014
MARKING	ASME B16.34	TEMPERATURE	-20 ~ 392	REVIEW:	SHAWN	DATE:	09/23/2014
OTHER REQ.	—	MEDIUM	Water, Oil, Gas	APPROVE:	—	DATE:	—

TITLE:
NPS 6 CLASS 600 RF BOLTED BONNET GLOBE VALVE A351 CF3M
TRIM API 21 HANDWHEEL OPERATED

DWG NO.	QUOTE NO.	PO NO.
06GL6R1S821N0H	BH14092204	—
 FBV, INC. 2121 BRITTMORE RD SUITE 4000 HOUSTON, TX 77043, USA TEL: 832-203-5459 FAX: 832-203-5461 http://www.fbvvalve.com		