




GIUNZIONE FILO PRECOMPRESSIONE

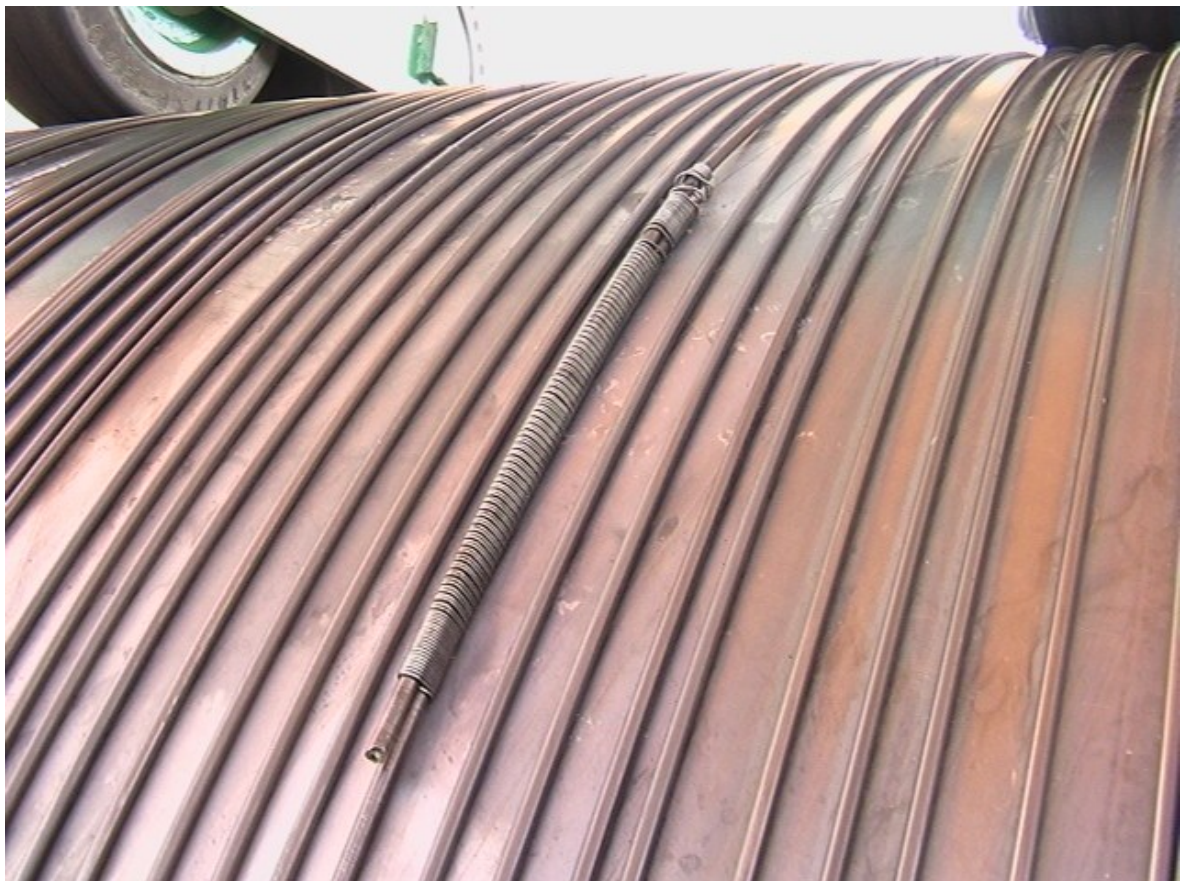

Revision :

21.12.2006

Zugf_EXTRA

Klaviersaitenfederstahldraht

„Röslau-Extra“

FILO ARMONICO UTILIZZATO PER GIUNZIONE**Music Spring Steel Wire**

„Röslau-Extra“



mm Ø	Tol. mm	N/mm²	mm Ø	Tol. mm	N/mm²		
0,07	+/- 0,004	2700-3090	1,25	+/- 0,015	2350-2650		
0,08			1,30				
0,09			1,40				
0,10			1,50	+/- 0,020	2260-2500		
0,11			1,60		2210-2450		
0,12			1,70				
0,14			1,80		2110-2350		
0,16			1,90				
0,18			2,00		2010-2260		
0,20			2,10				
0,22	+/- 0,008	2650-3040	2,25	+/- 0,025	1960-2210		
0,25			2,40		1910-2160		
0,28			2,50				
0,30			2,60		1860-2110		
0,32			2,80				
0,34			3,00		1810-2060		
0,36			3,20				
0,38			3,40		1770-2010		
0,40			3,60				
0,43			+/- 0,010		2650-2940	3,80	+/- 0,035
0,45	4,00	1620-1860					
0,48	4,25			1570-1820			
0,50	4,50						
0,53	2550-2840	4,75		1520-1770			
0,56		5,00			1470-1740		
0,60		5,30		1420-1680			
0,63		5,60					
0,65	2500-2790	6,00		1320-1630			
0,70		6,30					
0,75		6,50	+/- 0,050	1320-1590			
0,80	7,00						
0,85	+/- 0,015	2450-2750	7,50	+/- 0,050	1320-1590		
0,90			8,00				
0,95			8,50				
1,00			9,00				
1,05			9,50				
1,10			10,00				
1,20			2350-2650				

Stahl - und Drahtwerk Röslau GmbH

Hofer Str. 16/17 D - 95195 Röslau

Tel.: (+49) 09238 / 80928 Fax: (+49) 09238 / 80910 eMail: g-gleissner@roeslau-draht.com